
Classic XXI







Your path to a better workplace starts here.


Click on the pictures to browse our products, clicking the will return you to this page.
































How-to Order & Sales Pg. 78



CLASSIX XXI 2025-10-01 v1.04

Ensemble • Overview











Panel-to-Panel Power laid power management custimizable

CLASSIC XXI

- Assemble and disassemble 'modules' with segmented and stackable panels assembled in any combination, allowing on-module and off-module accessories matching OFG System
- Accommodates all standard types of cables, easily customized and accessed in the steel frame with "U" channels for laid management
- Solid panel construction can support worksurfaces, shelves and overhead cabinets all 'on-module'




- All cables are laid into the system without threading through the frame to greatly enhance the ability to reconfigure the system with minimal disruption and downtime
- Accommodates accessories both "on-module" and "off-module," allowing overheads and panels of different widths to be used together and moved horizontally with minimal effort







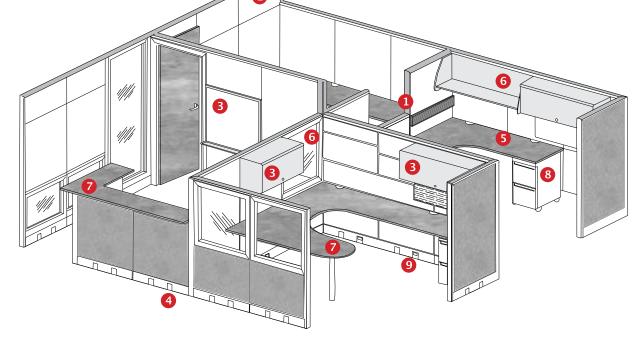

NOTES:

- · Product dimensions are given in approximate inches
- · Appearance of product may vary from descriptions
- When ordering Fabric Panels, the higher grade value will determine the price auote
- Power accessories and Vertical posts
- Noise Reduction Coefficient is based on the test method ASTM C-423
- Review finish options on pg. 76, Or see OFG Finish and Upholstery Card

Customization Finish Index

Metal Powder Coat Uphoistery Laminate Plastic propylene (POLY) Color Glass, Tackboard Toolrail and

Markerboard









6 Cantilever Worksurfaces

Panel • Overview




Cable management easily achieved throughout the panel perimeter



Top caps (PVC or metal) cover cable



Panel and ceiling cabling connected by data & power communication pole



Base raceway knockouts with bezel, base feeds & filler plates

Assemble and disassemble 'modules' with segmented and stackable panels assembled in any combination, allowing on-module and off-module accessories matching OFG System

CLASSIC XXI

- Accommodates all standard types of cables, easily customized and accessed in the steel frame with "U" channels for laid management
- Solid panel construction can support worksurfaces, shelves and overhead cabinets all 'on-module'


All modular panel system components originate from ISO 9000, ISO 9001, or ISO 9002 registered facilities


- UNICOR CLASSIC XXI SYSTEM MEETS OR EXCEEDS THE REQUIRED ANSI/ BIFMA X5.6-2010 PANEL SYSTEM
- Classic XXI System panels are Listed to applicable U.S. and Canadian safety standards and requirements by Underwriters Laboratories Inc.
- Two of the standards used to evaluate are UL 1286, Office Furnishings and UL 723 (ASTM E84 & National Fire **Protection Association Life Safety** Code 255), Standard for Test for Surface Burning






Included glide supports panels

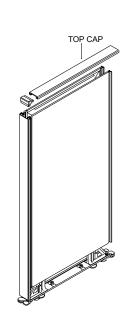


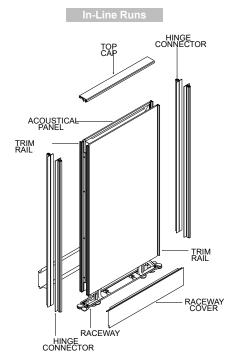

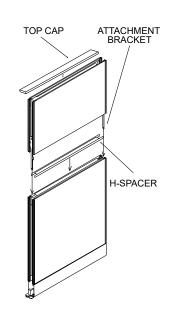


P10 Simply laid power system connects panels in any configuration


P10





Standalone desking achievable






- NOTES: · Product dimensions are given in approximate inches
- · Appearance of product may vary from descriptions
- When ordering Fabric Panels, the higher grade value will determine the price auote
- Power accessories and Vertical posts
- Noise Reduction Coefficient is based on the test method ASTM C-423
- Review finish options on pg. 76, Or see OFG Finish and Upholstery Card



Fully configurable to meet all needs

Panels • Table of Contents

Pas. 6-7



Fabric Acoustic Panel (CICP)



Pgs. 8-9

Pg. 18-19


Extended Raceway Fabric Acoustic Pane



Full Glass Panel Pg. 10




Open Frame Panel (CIOFP)



Overall panel thickness is 2.5" comprised of panel raceway, trim rails, trim and finish


cabinets all 'on-module'




Solid panel construction can support worksurfaces, shelves and overhead


CLASSIC XXI

Assemble and disassemble 'modules'





- Trim is made of rigid material either metal powder-coated (metal) or polypropylene color (plastic) with a press-fit design
- Upholstery finish is held in place by elastic extruded spline rolled into welting groove and field replaceable

















Bottom Open Frame Panel



Extended Raceway Bottom Open Frame Panel (CIEBOFP)

Pgs. 20-21

NOTES:

- · Product dimensions are given in approximate inches
- · Appearance of product may vary
- from descriptions

 When ordering Fabric Panels, the higher grade value will determine the price auote
- Power accessories and Vertical posts are sold separately
- · Noise Reduction Coefficient is based on the test method ASTM C-423
- Review finish options on pg. 76, Or see OFG Finish and Upholstery Card



Base Product (CICP) Assembled View

				Fabric Pricing			Upcharges	
DESCRIPTION	PRODUCT NUMBER	WIDTH		Grade A	Grade B			
Fabric Acoustic Panel	CICP1232	12	32	\$	\$	\$	\$	\$
rabilic Acoustic Pallel	CICP1242	12	42	\$	\$	\$	\$	\$
	CICP1248	12	48	\$	\$	\$	\$	\$
Full fabric frames on both sides	CICP1254	12	54	\$	\$	\$	\$	\$
Powered and non-powered versions	CICP1262	12	62	\$	\$	\$	\$	\$
available (see base configuration	CICP1266	12	66	\$	\$	\$	\$	\$
upgrade kit)	CICP1272	12	72	\$	\$	\$	\$	\$
 4" tall wireway for routing data/ 	CICP1280	12	80	\$	\$	\$	\$	\$
communication cables, separated by a	CICP1832	18	32	\$	\$	\$	\$	\$
continuous steel septum with purchase	CICP1842	18	42	\$	\$	\$	\$	\$
of T4/T6 Base Configuration	CICP1848	18	48	\$	\$	\$	\$	\$
 Powered Base Configuration Kit contents will vary by Panel Width 	CICP1854	18	54	\$	\$	\$	\$	\$
(see below)	CICP1862	18	62	\$	\$	\$	\$	\$
12" and 18" Width Panels include	CICP1866	18	66	\$	\$	\$	\$	\$
Vertical Jumper	CICP1872	18	72	\$	\$	\$	\$	\$
24" Width Panels include Rigid	CICP1880	18	80	\$	\$	\$	\$	\$
Wireway with Raceway Cover with	CICP2432	24	32	\$	\$	\$	\$	\$
two access doors (covers included) &	CICP2442	24	42	\$	\$	\$	\$	\$
Septum Bridge	CICP2448	24	48	\$	\$	\$	\$	\$
30" & larger Width Panels include Rigid Wireway with Raceway Cover	CICP2454	24	54	\$	\$	\$	\$	\$
with four access doors (covers	CICP2462	24	62	\$	\$	\$	\$	\$
included) & Septum Bridge	CICP2466	24	66	\$	\$	\$	\$	\$
Noise Reduction Coefficient is rated at	CICP2472	24	72	\$	\$	\$	\$	\$
least 0.75	CICP2480	24	80	\$	\$	\$	\$	\$
 Speech Privacy/Noise Isolation Class is 	CICP3032	30	32	\$	\$	\$	\$	\$
ranked 21 at a distance of 7'	CICP3042	30	42	\$	\$	\$	\$	\$
 Allows cable management access 	CICP3048	30	48	\$	\$	\$	\$	\$
around the entire perimeter of the panel	CICP3054	30	54	\$	\$	\$	\$	\$
 Included glides offer 3-1/2" vertical 	CICP3062	30	62	\$	\$	\$	\$	\$
adjustment (minimum of two)	CICP3066	30	66	\$	\$	\$	\$	\$
	CICP3072	30	72	\$	\$	\$	\$	\$
	CICP3080	30	80	\$	\$	\$	\$	\$
	CICP3632	36	32	\$	\$	\$	\$	\$
	CICP3642	36	42	\$	\$	\$	\$	\$
	CICP3648	36	48	\$	\$	\$	\$	\$
	CICP3654	36	54	\$	\$	\$	\$	\$
	CICP3662	36	62	\$	\$	\$	\$	\$
	CICP3666	36	66	\$	\$	\$	\$	\$
	CICP3672	36	72	\$	\$	\$	\$	\$
	CICP3680	36	80	\$	\$	\$	\$	\$

↓CONTINUED ON NEXT PAGE ↓

TO ORDER:

Select the product number and then add the codes for Trim Style, Color Selection, Fabric Option and Base Configuration.

For example, to order a Classic XXI 12" x 32" Standard Raceway Fabric Acoustic Panel (CICP1232), w/ PVC Plastic Trim Style (P), Black Plastic Color (B), 8066 Pewter Interlude Fabric (8066) and Universal 10-wire, 6-2-2 (T6), select:

Trim Style					
М	Metal (Metal Powder-Coat Finish)				
Р	PVC Plastic				

(if product contains add	Selection itional components with a ection will be matched)				
Plastic Trim Style	Metal Trim Style				
Black (B)	Black (27)				
Grey (G)	Gray (29)				
Liebt Tono (L)	Light Tone (32)				
Light Tone (L)	Cottonwood (35)				
Sand (S)	Sand (28)				
Marine Cres (AAA	Warm Gray (33)				
Warm Grey (W)	Starlight Silver (B)				

	Fabric Option	
See O	FG Upholstery Card for offerings.	

	Trim Style Fabric Option
	Base Configuration ee Upcharge Pricing)
TN	Universal non-powered
T4	Universal 10-wire, 4-4-2
T6	Universal 10-Wire, 6-2-2

Color Selection Base Configuration

P B 8066 T6

Product Number

CICP1232

CLASSIC XXI

- Assemble and disassemble 'modules' with segmented and stackable panels assembled in any combination, allowing on-module and off-module accessories matching OFG System
- Accommodates all standard types of cables, easily customized and accessed in the steel frame with "U" channels for laid management
- Solid panel construction can support worksurfaces, shelves and overhead cabinets all 'on-module'
- Overall panel thickness is 2.5" comprised of panel raceway, trim rails, trim and finish
- Constructed of metal frame, aluminum septum and fiberglass sandwiched between expanded metal, covered with fiberglass and fabric
- Panel raceway is made of 12-gauge steel pan offering support housing to give the panel rigidity and panel-topanel connections
- Trim rails are extruded aluminum secured by pre-formed flanges, allowing placement of hang-on (onmodule) components in 1" vertical increments
- Trim is made of rigid material either metal powder-coated (metal) or polypropylene color (plastic) with a press-fit design
- Upholstery finish is held in place by elastic extruded spline rolled into welting groove and field replaceable

NOTES:

- Product dimensions are given in approximate inches
- · Appearance of product may vary
- from descriptions

 When ordering Fabric Panels, the higher grade value will determine the price auote
- Power accessories and Vertical posts
- Noise Reduction Coefficient is based on the test method ASTM C-423
- Review finish options on pg. 76, Or see OFG Finish and Upholstery Card



|--|

Base Product (CICP) Assembled View

				Fabric Pricing				
DESCRIPTION	PRODUCT NUMBER	WIDTH		Grade A	Grade B	Grade C		
Fabric Acoustic Panel	CICP4232	42	32	\$	\$	\$	\$	\$
	CICP4242	42	42	\$	\$	\$	\$	\$
	CICP4248	42	48	\$	\$	\$	\$	\$
Full fabric frames on both sides	CICP4254	42	54	\$	\$	\$	\$	\$
Powered and non-powered versions	CICP4262	42	62	\$	\$	\$	\$	\$
available (see base configuration	CICP4266	42	66	\$	\$	\$	\$	\$
upgrade kit)	CICP4272	42	72	\$	\$	\$	\$	\$
 4" tall wireway for routing data/ 	CICP4280	42	80	\$	\$	\$	\$	\$
communication cables, separated by a	CICP4832	48	32	\$	\$	\$	\$	\$
continuous steel septum with purchase of T4/T6 Base Configuration	CICP4842	48	42	\$	\$	\$	\$	\$
· ·	CICP4848	48	48	\$	\$	\$	\$	\$
 Powered Base Configuration Kit contents will vary by Panel Width 	CICP4854	48	54	\$	\$	\$	\$	\$
(see below)	CICP4862	48	62	\$	\$	\$	\$	\$
42" & larger Width Panels include	CICP4866	48	66	\$	\$	\$	\$	\$
Rigid Wireway with Raceway Cover with four access doors (covers	CICP4872	48	72	\$	\$	\$	\$	\$
	CICP4880	48	80	\$	\$	\$	\$	\$
included) & Septum Bridge	CICP5432	54	32	\$	\$	\$	\$	\$
 42" & wider panels have a third vertical 	CICP5442	54	42	\$	\$	\$	\$	\$
support to add rigidity and tip-over resistance	CICP5448	54	48	\$	\$	\$	\$	\$
Noise Reduction Coefficient is rated at	CICP5454	54	54	\$	\$	\$	\$	\$
least 0.75	CICP5462	54	62	\$	\$	\$	\$	\$
Speech Privacy/Noise Isolation Class is	CICP5466	54	66	\$	\$	\$	\$	\$
ranked 21 at a distance of 7'	CICP5472	54	72	\$	\$	\$	\$	\$
Allows cable management access	CICP5480	54	80	\$	\$	\$	\$	\$
around the entire perimeter of the panel	CICP6032	60	32	\$	\$	\$	\$	\$
 Included glides offer 3-1/2" vertical 	CICP6042	60	42	\$	\$	\$	\$	\$
adjustment (minimum of two)	CICP6048	60	48	\$	\$	\$	\$	\$
	CICP6054	60	54	\$	\$	\$	\$	\$
	CICP6062	60	62	\$	\$	\$	\$	\$
	CICP6066	60	66	\$	\$	\$	\$	\$
	CICP6072	60	72	\$	\$	\$	\$	\$
	CICP6080	60	80	\$	\$	\$	\$	\$

CLASSIC XXI

- Assemble and disassemble 'modules' with segmented and stackable panels assembled in any combination, allowing on-module and off-module accessories matching OFG System
- Accommodates all standard types of cables, easily customized and accessed in the steel frame with "U" channels for laid management
- Solid panel construction can support worksurfaces, shelves and overhead cabinets all 'on-module'
- Overall panel thickness is 2.5" comprised of panel raceway, trim rails, trim and finish
- Constructed of metal frame, aluminum septum and fiberglass sandwiched between expanded metal, covered with fiberglass and fabric
- · Panel raceway is made of 12-gauge steel pan offering support housing to give the panel rigidity and panel-topanel connections
- · Trim rails are extruded aluminum secured by pre-formed flanges, allowing placement of hang-on (onmodule) components in 1" vertical increments
- Trim is made of rigid material either metal powder-coated (metal) or polypropylene color (plastic) with a press-fit design
- Upholstery finish is held in place by elastic extruded spline rolled into welting groove and field replaceable

TO ORDER:

Select the product number and then add the codes for Trim Style, Color Selection, Fabric Option and Base Configuration.

For example, to order a Classic XXI 42" x 32" Standard Raceway Fabric Acoustic Panel (CICP4232), w/ PVC Plastic Trim Style (P), Black Plastic Color (B), 8066 Pewter Interlude Fabric (8066) and Universal 10-wire, 6-2-2 (T6), select:

Trim Style					
М	Metal (Metal Powder-Coat Finish)				
Р	PVC Plastic				

(if product contains add	Selection ditional components with lection will be matched)
Plastic Trim Style	Metal Trim Style
Black (B)	Black (27)
Grey (G)	Gray (29)
Link Ton (II)	Light Tone (32)
Light Tone (L)	Cottonwood (35)
Sand (S)	Sand (28)
14/ 0 0.40	Warm Gray (33)
Warm Grey (W)	Starlight Silver (B)

• • •	
Fabric Option	(s
See OFG Upholstery Card for offerings.	TN
	T4

Product Number

CICP4232

Color Selection

Base Configuration ee Upcharge Pricing

Universal non-powered

Universal 10-wire, 4-4-2

Universal 10-Wire, 6-2-2

Trim Style

Base Configuration

B 8066 T6

Fabric Option

- · Product dimensions are given in approximate inches
- · Appearance of product may vary from descriptions
- When ordering Fabric Panels, the higher grade value will determine the price auote
- Power accessories and Vertical posts
- Noise Reduction Coefficient is based on the test method ASTM C-423
- Review finish options on pg. 76, Or see OFG Finish and Upholstery Card



Base Product (CIEFP) Assembled View

DESCRIPTION	PRODUCT NUMBER	WIDTH	HEIGHT	Grade A	Grade B	Grade C	T4	T6
Fotonded Bearing Febrie	CIEFP1236	12	36	\$	\$	\$	\$	\$
Extended Raceway Fabric Acoustic Panel	CIEFP1246	12	46	\$	\$	\$	\$	\$
Acoustic Patier	CIEFP1252	12	52	\$	\$	\$	\$	\$
Full fabric frames on both sides	CIEFP1258	12	58	\$	\$	\$	\$	\$
	CIEFP1266	12	66	\$	\$	\$	\$	\$
 Powered and non-powered versions available (see base configuration 	CIEFP1270	12	70	\$	\$	\$	\$	\$
upgrade kit)	CIEFP1276	12	76	\$	\$	\$	\$	\$
8" raceway features two 4" tall wireways	CIEFP1284	12	84	\$	\$	\$	\$	\$
separated by a continuous steel septum	CIEFP1836	18	36	\$	\$	\$	\$	\$
for routing data/communication cables,	CIEFP1846	18	46	\$	\$	\$	\$	\$
and with the purchase of T4/T6 Base Configuration Kit additional items are	CIEFP1852	18	52	\$	\$	\$	\$	\$
included	CIEFP1858	18	58	\$	\$	\$	\$	\$
Powered Base Configuration Kit	CIEFP1866	18	66	\$	\$	\$	\$	\$
contents will vary by Panel Width	CIEFP1870	18	70	\$	\$	\$	\$	\$
(see below)	CIEFP1876	18	76	\$	\$	\$	\$	\$
12" and 18" Width Panels include	CIEFP1884	18	84	\$	\$	\$	\$	\$
Vertical Jumper	CIEFP2436	24	36	\$	\$	\$	\$	\$
24" Width Panels include Rigid	CIEFP2446	24	46	\$	\$	\$	\$	\$
Wireway with Raceway Cover with	CIEFP2452	24	52	\$	\$	\$	\$	\$
two access doors (covers included) & Septum Bridge	CIEFP2458	24	58	\$	\$	\$	\$	\$
30" & larger Width Panels include	CIEFP2466	24	66	\$	\$	\$	\$	\$
Rigid Wireway with Raceway Cover	CIEFP2470	24	70	\$	\$	\$	\$	\$
with four access doors (covers	CIEFP2476	24	76	\$	\$	\$	\$	\$
included) & Septum Bridge	CIEFP2484	24	84	\$	\$	\$	\$	\$
Noise Reduction Coefficient is rated at	CIEFP3036	30	36	\$	\$	\$	\$	\$
least 0.75	CIEFP3046	30	46	\$	\$	\$	\$	\$
 Speech Privacy/Noise Isolation Class is ranked 21 at a distance of 7' 	CIEFP3052	30	52	\$	\$	\$	\$	\$
	CIEFP3058	30	58	\$	\$	\$	\$	\$
 Allows cable management access around the entire perimeter of the panel 	CIEFP3066	30	66	\$	\$	\$	\$	\$
 Included glides offer 3-1/2" vertical 	CIEFP3070	30	70	\$	\$	\$	\$	\$
adjustment (minimum of two)	CIEFP3076	30	76	\$	\$	\$	\$	\$
adjacenon (minimum of tho)	CIEFP3084	30	84	\$	\$	\$	\$	\$
	CIEFP3636	36	36	\$	\$	\$	\$	\$
	CIEFP3646	36	46	\$	\$	\$	\$	\$
	CIEFP3652	36	52	\$	\$	\$	\$	\$
	CIEFP3658	36	58	\$	\$	\$	\$	\$
	CIEFP3666	36	66	\$	\$	\$	\$	\$
	CIEFP3670	36	70	\$	\$	\$	\$	\$
	CIEFP3676	36	76	\$	\$	\$	\$	\$

↓CONTINUED ON NEXT PAGE ↓

TO ORDER:

Select the product number and then add the codes for Trim Style, Color Selection, Fabric Option and Base Configuration.

For example, to order a Classic XXI 12" x 36" Extended Raceway Fabric Acoustic Panel (CIECP1236), w/ PVC Plastic Trim Style (P), Black Plastic Color (B), 8066 Pewter Interlude Fabric (8066) and Universal 10-wire, 6-2-2 (T6), select:

Trim Style		
М	Metal (Metal Powder-Coat Finish)	
Р	PVC Plastic	

(if product contains add	Selection ditional components wi lection will be matched)
Plastic Trim Style	Metal Trim Style
Black (B)	Black (27)
Grey (G)	Gray (29)
Light Tone (L)	Light Tone (32)
	Cottonwood (35)
Sand (S)	Sand (28)
14/ 0 0.40	Warm Gray (33)
Warm Grey (W)	Starlight Silver (B)

Fabric Option See OFG Upholstery Card for offerings.

CIEFP3684

CIE	FP1236	P B 0000 10	
		 Trim Style Fabric Option	
		Base Configuration ee Upcharge Pricing)	
	TN	Universal non-powered	
	T4	Universal 10-wire, 4-4-2	
	Т6	Universal 10-Wire, 6-2-2	

CIEED1226 D B 8066 T6

Color Selection Base Configuration

CLASSIC XXI

- Assemble and disassemble 'modules' with segmented and stackable panels assembled in any combination, allowing on-module and off-module accessories matching OFG System
- Accommodates all standard types of cables, easily customized and accessed in the steel frame with "U" channels for laid management
- Solid panel construction can support worksurfaces, shelves and overhead cabinets all 'on-module'
- Overall panel thickness is 2.5" comprised of panel raceway, trim rails, trim and finish
- Constructed of metal frame, aluminum septum and fiberglass sandwiched between expanded metal, covered with fiberglass and fabric
- Panel raceway is made of 12-gauge steel pan offering support housing to give the panel rigidity and panel-topanel connections
- Trim rails are extruded aluminum secured by pre-formed flanges, allowing placement of hang-on (onmodule) components in 1" vertical increments
- Trim is made of rigid material either metal powder-coated (metal) or polypropylene color (plastic) with a press-fit design
- Upholstery finish is held in place by elastic extruded spline rolled into welting groove and field replaceable

NOTES:

- Product dimensions are given in approximate inches
- · Appearance of product may vary from descriptions
- When ordering Fabric Panels, the higher grade value will determine the price auote
- Power accessories and Vertical posts
- Noise Reduction Coefficient is based on the test method ASTM C-423
- Review finish options on pg. 76, Or see OFG Finish and Upholstery Card



36

84

Product Number

Base Product (CIEFP) Assembled View

				F	abric Pricir		
DESCRIPTION	PRODUCT NUMBER	WIDTH		Grade A	Grade B	T4	
Extended Raceway Fabric	CIEFP4236	42	36	\$	\$	\$ \$	\$
Acoustic Panel	CIEFP4246	42	46	\$	\$	\$ \$	\$
	CIEFP4252	42	52	\$	\$	\$ \$	\$
Full fabric frames on both sides	CIEFP4258	42	58	\$	\$	\$ \$	\$
Powered and non-powered versions	CIEFP4266	42	66	\$	\$	\$ \$	\$
available (see base configuration	CIEFP4270	42	70	\$	\$	\$ \$	\$
upgrade kit)	CIEFP4276	42	76	\$	\$	\$ \$	\$
8" raceway features two 4" tall wireways	CIEFP4284	42	84	\$	\$	\$ \$	\$
separated by a continuous steel septum	CIEFP4836	48	36	\$	\$	\$ \$	\$
for routing data/communication cables,	CIEFP4846	48	46	\$	\$	\$ \$	\$
and with the purchase of T4/T6 Base Configuration Kit additional items are included	CIEFP4852	48	52	\$	\$	\$ \$	\$
	CIEFP4858	48	58	\$	\$	\$ \$	\$
Powered Base Configuration Kit contents will vary by Panel Width	CIEFP4866	48	66	\$	\$	\$ \$	\$
	CIEFP4870	48	70	\$	\$	\$ \$	\$
(see below)	CIEFP4876	48	76	\$	\$	\$ \$	\$
42" & larger Width Panels include	CIEFP4884	48	84	\$	\$	\$ \$	\$
Rigid Wireway with Raceway Cover	CIEFP5436	54	36	\$	\$	\$ \$	\$
with four access doors (covers included) & Septum Bridge	CIEFP5446	54	46	\$	\$	\$ \$	\$
Noise Reduction Coefficient is rated at	CIEFP5452	54	52	\$	\$	\$ \$	\$
least 0.75	CIEFP5458	54	58	\$	\$	\$ \$	\$
Speech Privacy/Noise Isolation Class is	CIEFP5466	54	66	\$	\$	\$ \$	\$
ranked 21 at a distance of 7'	CIEFP5470	54	70	\$	\$	\$ \$	\$
Allows cable management access	CIEFP5476	54	76	\$	\$	\$ \$	\$
around the entire perimeter of the panel	CIEFP5484	54	84	\$	\$	\$ \$	\$
 Included glides offer 3-1/2" vertical 	CIEFP6036	60	36	\$	\$	\$ \$	\$
adjustment (minimum of two)	CIEFP6046	60	46	\$	\$	\$ \$	\$
	CIEFP6052	60	52	\$	\$	\$ \$	\$
	CIEFP6058	60	58	\$	\$	\$ \$	\$
	CIEFP6066	60	66	\$	\$	\$ \$	\$
	CIEFP6070	60	70	\$	\$	\$ \$	\$

60

60

76

Product Number

CIECP4236

CLASSIC XXI

- Assemble and disassemble 'modules' with segmented and stackable panels assembled in any combination, allowing on-module and off-module accessories matching OFG System
- Accommodates all standard types of cables, easily customized and accessed in the steel frame with "U" channels for laid management
- Solid panel construction can support worksurfaces, shelves and overhead cabinets all 'on-module'
- Overall panel thickness is 2.5" comprised of panel raceway, trim rails, trim and finish
- Constructed of metal frame, aluminum septum and fiberglass sandwiched between expanded metal, covered with fiberglass and fabric
- Panel raceway is made of 12-gauge steel pan offering support housing to give the panel rigidity and panel-topanel connections
- Trim rails are extruded aluminum secured by pre-formed flanges, allowing placement of hang-on (onmodule) components in 1" vertical increments
- Trim is made of rigid material either metal powder-coated (metal) or polypropylene color (plastic) with a press-fit design
- Upholstery finish is held in place by elastic extruded spline rolled into welting groove and field replaceable

TO ORDER:

Select the product number and then add the codes for Trim Style, Color Selection, Fabric Option and Base Configuration.

For example, to order a Classic XXI 42" x 36" Extended Raceway Fabric Acoustic Panel (CIECP4236), w/ PVC Plastic Trim Style (P), Black Plastic Color (B), 8066 Pewter Interlude Fabric (8066) and Universal 10-wire, 6-2-2 (T6), select:

Trim Style		
М	Metal (Metal Powder-Coat Finish)	
Р	PVC Plastic	

(if product contains add	Selection ditional components with a ection will be matched)
Plastic Trim Style	Metal Trim Style
Black (B)	Black (27)
Grey (G)	Gray (29)
Light Tone (L)	Light Tone (32)
	Cottonwood (35)
Sand (S)	Sand (28)
14/ 0 0.40	Warm Gray (33)
Warm Grey (W)	Starlight Silver (B)

See OFG Upholstery Card for offerings.

CIEFP6076

CIEFP6084

	Trim Style	Fabric Option
	ase Confi e Upcharç	iguration ge Pricing)
TN	Universal non-p	owered
T4	Universal 10-wi	re, 4-4-2
T6	Universal 10-Wi	ire, 6-2-2

Color Selection Base Configuration

P B 8066 T6

- Product dimensions are given in approximate inches
- · Appearance of product may vary from descriptions
- When ordering Fabric Panels, the higher grade value will determine the price auote
- Power accessories and Vertical posts
- Noise Reduction Coefficient is based on the test method ASTM C-423
- Review finish options on pg. 76, Or see OFG Finish and Upholstery Card



Panel • Glass



Base Product (CIG) Assembled View

DESCRIPTION	PRODUCT NUMBER	WIDTH	HEIGHT	PRICE	T4	T6
ull Glass Panel	CICGP1248	12	48	\$	\$	\$
un Glaco i anoi	CICGP1254	12	54	\$	\$	\$
	CICGP1262	12	62	\$	\$	\$
Painted aluminum frame with 1/4" glass	CICGP1266	12	66	\$	\$	\$
Powered and non-powered versions	CICGP1272	12	72	\$	\$	\$
available (see base configuration	CICGP1280	12	80	\$	\$	\$
upgrade kit)	CICGP1848	18	48	\$	\$	\$
4" tall wireway for routing data/	CICGP1854	18	54	\$	\$	\$
communication cables, separated by a	CICGP1862	18	62	\$	\$	\$
continuous steel septum with purchase	CICGP1866	18	66	\$	\$	\$
of T4/T6 Base Configuration	CICGP1872	18	72	\$	\$	\$
Powered Base Configuration Kit	CICGP1880	18	80	\$	\$	\$
contents will vary by Panel Width	CICGP2448	24	48	\$	\$	\$
(see below)	CICGP2454	24	54	\$	\$	\$
12" and 18" Width Panels include	CICGP2462	24	62	\$	\$	\$
Vertical Jumper	CICGP2466	24	66	\$	\$	\$
	CICGP2472	24	72	\$	\$	\$
24" Width Panels include Rigid	CICGP2480	24	80	\$	\$	\$
Wireway with Raceway Cover with	CICGP3048	30	48	\$	\$	\$
two access doors (covers included) & Septum Bridge	CICGP3054	30	54	\$	\$	\$
	CICGP3062	30	62	\$	\$	\$
30" & larger Width Panels include	CICGP3066	30	66	\$	\$	\$
Rigid Wireway with Raceway Cover with four access doors (covers	CICGP3072	30	72	\$	\$	\$
included) & Septum Bridge	CICGP3080	30	80	\$	\$	\$
,	CICGP3648	36	48	j š j	\$	\$
 Allows cable management access around the entire perimeter of the pane Included glides offering 3-1/2" vertical 	CICGP3654	36	54	\$	\$	\$
	CICGP3662	36	62	† š †	\$	\$
Included glides offering 3-1/2" vertical	CICGP3666	36	66	\$	\$	\$
adjustment (minimum of two)	CICGP3672	36	72	\$	\$	\$
	CICGP3680	36	80	\$	\$	\$
	CICGP4248	42	48	\$	\$	\$
	CICGP4254	42	54	\$	\$	\$
	CICGP4262	42	62	\$	\$	\$
	CICGP4266	42	66	\$	\$	\$
	CICGP4200 CICGP4272	42	72	\$	\$ \$	\$
	CICGP4272 CICGP4280	42	80	\$	\$	\$
	CICGP4260 CICGP4848	48	48	\$	ў	
	CICGP4854	48	40 54	\$	ъ \$	\$
	CICGP4854 CICGP4862	48	62	\$	ъ \$	\$
		48 48	66			
	CICGP4866		72	\$	\$	\$
	CICGP4872	48		\$	\$	\$
	CICGP4880	48	80	\$	\$	\$

CLASSIC XXI

- Assemble and disassemble 'modules' with segmented and stackable panels assembled in any combination, allowing on-module and off-module accessories matching OFG System
- Accommodates all standard types of cables, easily customized and accessed in the steel frame with "U" channels for laid management
- Solid panel construction can support worksurfaces, shelves and overhead cabinets all 'on-module'
- Overall panel thickness is 2.5" comprised of panel raceway, trim rails, trim and finish
- Panel raceway is made of 12-gauge steel pan offering support housing to give the panel rigidity and panel-topanel connections
- · Trim rails are extruded aluminum secured by pre-formed flanges, allowing placement of hang-on (on-module) components in 1" vertical increments
- Trim is made of rigid material either metal powder-coated (metal) or polypropylene color (plastic) with a press-fit design

TO ORDER:

Select the product number and then add the codes for Trim Style, Color Selection and Base Configuration.

For example, to order a Classic XXI 12" x 42" Standard Raceway Glass Panel (CICGP1242), w/ PVC Plastic Trim Style (P), Black Plastic Color (B) and Universal 10-wire, 6-2-2 (T6), select::

Trim Style		
М	Metal (Metal Powder-Coat Finish)	
Р	PVC Plastic	

Color Selection (if product contains additional components with a color option, the selection will be matched)				
Plastic Trim Style	Metal Trim Style			
Black (B)	Black (27)			
Grey (G)	Gray (29)			
Linkt Tono (L)	Light Tone (32)			
Light Tone (L)	Cottonwood (35)			
Sand (S)	Sand (28)			
Marm Croy (MA)	Warm Gray (33)			
Warm Grey (W)	Starlight Silver (B)			

Base Configuration (see Upcharge Pricing)				
TN	Universal non-powered			
T4	Universal 10-wire, 4-4-2			
T6	Universal 10-Wire, 6-2-2			

- Product dimensions are given in approximate inches
- · Appearance of product may vary
- from descriptions

 When ordering Fabric Panels, the higher grade value will determine the price auote
- Power accessories and Vertical posts
- Noise Reduction Coefficient is based on the test method ASTM C-423
- Review finish options on pg. 76, Or see OFG Finish and Upholstery Card



Product Number

CICGP1242

Color Selection

Base Configuration

Septum Bridge

... 30" & larger Width Panels include Rigid Wireway with Raceway Cover


with four access doors (covers included) & Septum Bridge

Allows cable management access

adjustment (minimum of two)

around the entire perimeter of the panel

Included glides offering 3-1/2" vertical

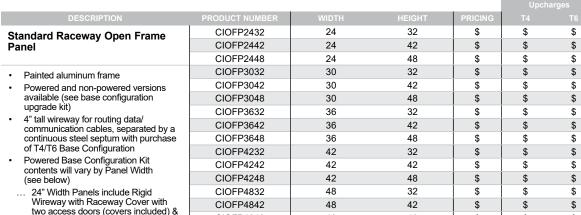

48

48

\$

\$

\$

CIOFP4848

CLASSIC XXI

- Assemble and disassemble 'modules' with segmented and stackable panels assembled in any combination, allowing on-module and off-module accessories matching OFG System
- Accommodates all standard types of cables, easily customized and accessed in the steel frame with "U" channels for laid management
- Solid panel construction can support worksurfaces, shelves and overhead cabinets all 'on-module'
- Overall panel thickness is 2.5" comprised of panel raceway, trim rails, trim and finish
- Panel raceway is made of 12-gauge steel pan offering support housing to give the panel rigidity and panel-topanel connections
- · Trim rails are extruded aluminum secured by pre-formed flanges, allowing placement of hang-on (onmodule) components in 1" vertical increments
- Trim is made of rigid material either metal powder-coated (metal) or polypropylene color (plastic) with a préss-fit design

TO ORDER:

Select the product number and then add the codes for Trim Style, Color Selection and Base Configuration.

For example, to order a Classic XXI 24" x 32" Standard Raceway Open Panel (CIOFP2432), w/ PVC Plastic Trim Style (P), Black Plastic Color (B) and Universal 10-wire, 6-2-2 (T6), select

Product Number Color Selection CIOFP2432 T6 Trim Style Base Configuration

NOTES:

- · Product dimensions are given in approximate inches
- · Appearance of product may vary from descriptions
- When ordering Fabric Panels, the higher grade value will determine the price auote
- Power accessories and Vertical posts are sold separately


 Noise Reduction Coefficient is based
- on the test method ASTM C-423
- Review finish options on pg. 76, Or see OFG Finish and Upholstery Card



Base Product (CIOFP) Assembled View

Panel • Fabric & Laminate





Base Product (CICPFL) Assembled View

Standard Raceway Fabric and **Laminate Panel** Constructed of a metal frame with fiberglass sandwiched between Masonite skins covered with fiberglass and finished (fabric & laminate) Powered and non-powered versions available (see base configuration upgrade kit) 4" tall wireway for routing data/ communication cables, separated by a continuous steel septum with purchase of T4/T6 Base Configuration Powered Base Configuration Kit contents will vary by Panel Width

... 12" and 18" Width Panels include

24" Width Panels include Rigid

... 30" & larger Width Panels include Rigid Wireway with Raceway Cover

with four access doors (covers

Allows cable management access

around the entire perimeter of the panel

Metal Trim Style

Black (27)

Gray (29)

Sand (28) Warm Gray (33)

Light Tone (32)

Cottonwood (35)

Starlight Silver (B)

Included glides offering 3-1/2" vertical

included) & Septum Bridge

adjustment (minimum of two)

Wireway with Raceway Cover with

two access doors (covers included) &

(see below)

Plastic Trim Style

Black (B)

Grey (G)

Sand (S)

Light Tone (L)

Warm Grey (W)

Vertical Jumper

Septum Bridge

CICPFL1232	12	32	\$
CICPFL1242	12	42	\$
CICPFL1248	12	48	\$
CICPFL1254	12	54	\$
CICPFL1262	12	62	\$
CICPFL1266	12	66	\$
CICPFL1272	12	72	\$
CICPFL1280	12	80	\$
CICPFL1832	18	32	\$
CICPFL1842	18	42	\$
CICPFL1848	18	48	\$
CICPFL1854	18	54	\$
CICPFL1862	18	62	\$
CICPFL1866	18	66	\$
CICPFL1872	18	72	\$
CICPFL1880	18	80	\$
CICPFL2432	24	32	\$
CICPFL2442	24	42	\$
CICPFL2448	24	48	\$
CICPFL2454	24	54	\$
CICPFL2462	24	62	\$
CICPFL2466	24	66	\$
CICPFL2472	24	72	\$
CICPFL2480	24	80	\$
CICPFL3032	30	32	\$
CICPFL3042	30	42	\$
CICPFL3048	30	48	\$
CICPFL3054	30	54	\$
CICPFL3062	30	62	\$
CICPFL3066	30	66	\$
CICPFL3072	30	72	\$
CICPFL3080	30	80	\$
CICPFL3632	36	32	\$
CICPFL3642	36	42	\$
CICPFL3648	36	48	\$
CICPFL3654	36	54	\$

CICPFL3654 36 36 62 CICPFL3662 CICPFL3666 36 66 CICPFL3672 36 72 CICPFL3680 36 80 Select the product number and then add the codes for Trim Style, Color Selection, Fabric Option, Laminate Option and Base Configuration. For example, to order a Classic XXI 12" x 32" Standard Raceway Fabric and Laminate Panel (CICPFL1232), w/ PVC Plastic Trim Style (P), Black Plastic Color (B) 8066 Pewter Interlude Fabric (8066), Biltmore Cherry Laminate Finish (4031) and Universal 10-wire, 6-2-2 (T6), select: **Fabric Option** See OFG Upholstery Card for offerings. **Laminate Option** See OFG Finish Card for offerings.

\$ \$ \$ \$ \$ \$ \$ \$ \$ Product Number Color Selection Laminate Option B 8066 4031 T6 CICPFL1232 Trim Style Fabric Option Base Configuration **Base Configuration** (see Upcharge Pricing TN Universal non-powered T4 Universal 10-wire, 4-4-2 T6 Universal 10-Wire, 6-2-2

\$

\$

\$

\$

\$

\$

\$

\$

\$

\$

\$

\$

\$

\$

\$

\$

\$

\$

\$

\$

\$

\$

\$

\$

\$

\$

\$

\$

\$

\$

\$

\$

\$

\$

\$

\$

\$

\$

\$

\$

\$

\$

\$

\$ \$

\$

\$

\$

\$

\$

\$

\$

\$

\$

\$

\$

\$

\$

\$

\$

\$

\$

\$

\$

\$

\$

\$

\$

\$

\$

\$

\$

\$

\$

\$

\$

\$

\$

\$

\$

\$

\$

\$

\$

\$

\$

\$

\$ \$

\$ \$

\$

CLASSIC XXI

- Assemble and disassemble 'modules' with segmented and stackable panels assembled in any combination, allowing on-module and off-module accessories matching OFG System
- Accommodates all standard types of cables, easily customized and accessed in the steel frame with "U" channels for laid management
- Solid panel construction can support worksurfaces, shelves and overhead cabinets all 'on-module'
- Overall panel thickness is 2.5" comprised of panel raceway, trim rails, trim and finish
- Constructed of metal frame, aluminum septum and fiberglass sandwiched between expanded metal. covered with fiberglass and fabric
- Panel raceway is made of 12-gauge steel pan offering support housing to give the panel rigidity and panel-topanel connections
- Trim rails are extruded aluminum secured by pre-formed flanges, allowing placement of hang-on (onmodule) components in 1" vertical increments
- Trim is made of rigid material either metal powder-coated (metal) or polypropylene color (plastic) with a press-fit design
- Upholstery finish is held in place by elastic extruded spline rolled into welting groove and field replaceable

NOTES:

- · Product dimensions are given in approximate inches
- Appearance of product may vary from descriptions
- When ordering Fabric Panels, the higher grade value will determine the price auote
- Power accessories and Vertical posts
- Noise Reduction Coefficient is based on the test method ASTM C-423
- Review finish options on pg. 76, Or see OFG Finish and Upholstery Card



12

 \downarrow CONTINUED ON NEXT PAGE \downarrow

Trim Style


PVC Plastic

Metal (Metal Powder-Coat Finish)

TO ORDER:

Panel • Fabric & Laminate





Base Product (CICPFL) **Assembled View**

				F			
DESCRIPTION	PRODUCT NUMBER	WIDTH		Grade A	Grade B	Grade C	
Standard Raceway Fabric and	CICPFL4232	42	32	\$	\$	\$	\$ \$
Laminate Panel	CICPFL4242	42	42	\$	\$	\$	\$ \$
Luminato i uno	CICPFL4248	42	48	\$	\$	\$	\$ \$
Constructed of a metal frame with	CICPFL4254	42	54	\$	\$	\$	\$ \$
fiberglass sandwiched between	CICPFL4262	42	62	\$	\$	\$	\$ \$
Masonite skins covered with fiberglass	CICPFL4266	42	66	\$	\$	\$	\$ \$
and finished (fabric & laminate)	CICPFL4272	42	72	\$	\$	\$	\$ \$
 Powered and non-powered versions 	CICPFL4280	42	80	\$	\$	\$	\$ \$
available (see base configuration	CICPFL4832	48	32	\$	\$	\$	\$ \$
upgrade kit) • 4" tall wireway for routing data/	CICPFL4842	48	42	\$	\$	\$	\$ \$
 4" tall wireway for routing data/ communication cables, separated by a 	CICPFL4848	48	48	\$	\$	\$	\$ \$
continuous steel septum with purchase	CICPFL4854	48	54	\$	\$	\$	\$ \$
of T4/T6 Base Configuration	CICPFL4862	48	62	\$	\$	\$	\$ \$
Powered Base Configuration Kit	CICPFL4866	48	66	\$	\$	\$	\$ \$
contents will vary by Panel Width	CICPFL4872	48	72	\$	\$	\$	\$ \$
(see below)	CICPFL4880	48	80	\$	\$	\$	\$ \$
42" & larger Width Panels include	CICPFL5432	54	32	\$	\$	\$	\$ \$
Rigid Wireway with Raceway Cover with four access doors (covers	CICPFL5442	54	42	\$	\$	\$	\$ \$
included) & Septum Bridge	CICPFL5448	54	48	\$	\$	\$	\$ \$
Third vertical support to add rigidity and	CICPFL5454	54	54	\$	\$	\$	\$ \$
tip-over resistance	CICPFL5462	54	62	\$	\$	\$	\$ \$
Allows cable management access	CICPFL5466	54	66	\$	\$	\$	\$ \$
around the entire perimeter of the panel	CICPFL5472	54	72	\$	\$	\$	\$ \$
 Included glides offering 3-1/2" vertical 	CICPFL5480	54	80	\$	\$	\$	\$ \$
adjustment (minimum of two)	CICPFL6032	60	32	\$	\$	\$	\$ \$
	CICPFL6042	60	42	\$	\$	\$	\$ \$
	CICPFL6048	60	48	\$	\$	\$	\$ \$
	CICPFL6054	60	54	\$	\$	\$	\$ \$
	CICPFL6062	60	62	\$	\$	\$	\$ \$
	CICPFL6066	60	66	\$	\$	\$	\$ \$
	CICPFL6072	60	72	\$	\$	\$	\$ \$
	CICPFL6080	60	80	\$	\$	\$	\$ \$

CLASSIC XXI

- Assemble and disassemble 'modules' with segmented and stackable panels assembled in any combination, allowing on-module and off-module accessories matching OFG System
- Accommodates all standard types of cables, easily customized and accessed in the steel frame with "U" channels for laid management
- Solid panel construction can support worksurfaces, shelves and overhead cabinets all 'on-module'
- Overall panel thickness is 2.5" comprised of panel raceway, trim rails, trim and finish
- Constructed of metal frame, aluminum septum and fiberglass sandwiched between expanded metal, covered with fiberglass and fabric
- Panel raceway is made of 12-gauge steel pan offering support housing to give the panel rigidity and panel-topanel connections
- Trim rails are extruded aluminum secured by pre-formed flanges, allowing placement of hang-on (onmodule) components in 1" vertical increments
- Trim is made of rigid material either metal powder-coated (metal) or polypropylene color (plastic) with a press-fit design
- Upholstery finish is held in place by elastic extruded spline rolled into welting groove and field replaceable

TO ORDER:

Select the product number and then add the codes for Trim Style, Color Selection, Fabric Option, Laminate Option and Base Configuration.

For example, to order a Classic XXI 42" x 32" Standard Raceway Fabric and Laminate Panel (CICPFL1232), w/ PVC Plastic Trim Style (P), Black Plastic Color (B) 8066 Pewter Interlude Fabric (8066), Biltmore Cherry Laminate Finish (4031) and Universal 10-wire, 6-2-2 (T6), select:

Trim Style						
М	M Metal (Metal Powder-Coat Finish)					
P PVC Plastic						

Color Selection (if product contains additional components with a color option, the selection will be matched)				
Plastic Trim Style	Metal Trim Style			
Black (B)	Black (27)			
Grey (G)	Gray (29)			
Linkt Tono (L)	Light Tone (32)			
Light Tone (L)	Cottonwood (35)			
Sand (S)	Sand (28)			
Marm Croy (MA)	Warm Gray (33)			
Warm Grey (W)	Starlight Silver (B)			

Fabric Option
See OFG Upholstery Card for offerings.
Laminate Option
See OFG Finish Card for offerings.

	Inm Style	Fabric Option	Base Contiguration
	ase Confi e Upcharg)
TN	Universal non-po	owered	
T4	Universal 10-wire	e, 4-4-2	
T6	Universal 10-Wir	re, 6-2-2	

Laminate Option

B 8066 4031 T6

Product Number

CICPFL4232

- Product dimensions are given in approximate inches
- · Appearance of product may vary
- from descriptions

 When ordering Fabric Panels, the higher grade value will determine the price auote
- Power accessories and Vertical posts
- Noise Reduction Coefficient is based on the test method ASTM C-423
- Review finish options on pg. 76, Or see OFG Finish and Upholstery Card



Panel • Glass

Base Product (CICGFP) Assembled View

				F			
DESCRIPTION	PRODUCT NUMBER	WIDTH		Grade A	Grade B	Grade C	
Standard Raceway Glass/Fabric	CICGFP2454	24	54	\$	\$	\$	\$ \$
Panel	CICGFP2462	24	62	\$	\$	\$	\$ \$
	CICGFP2466	24	66	\$	\$	\$	\$ \$
Fabric finish at 29" high & lower	CICGFP2472	24	72	\$	\$	\$	\$ \$
Painted aluminum frame with 1/4" thick	CICGFP2480	24	80	\$	\$	\$	\$ \$
glass above 29" high (see options)	CICGFP3054	30	54	\$	\$	\$	\$ \$
Powered and non-powered versions	CICGFP3062	30	62	\$	\$	\$	\$ \$
available (see base configuration upgrade kit)	CICGFP3066	30	66	\$	\$	\$	\$ \$
4" tall wireway for routing data/	CICGFP3072	30	72	\$	\$	\$	\$ \$
communication cables, separated by a continuous steel septum with purchase of T4/T6 Base Configuration	CICGFP3080	30	80	\$	\$	\$	\$ \$
	CICGFP3654	36	54	\$	\$	\$	\$ \$
Powered Base Configuration Kit contents will vary by Panel Width (see below) 24" Width Panels include Rigid Wireway with Raceway Cover with	CICGFP3666	36	66	\$	\$	\$	\$ \$
	CICGFP3672	36	72	\$	\$	\$	\$ \$
	CICGFP3680	36	80	\$	\$	\$	\$ \$
	CICGFP4254	42	54	\$	\$	\$	\$ \$
two access doors (covers included) &	CICGFP4266	42	66	\$	\$	\$	\$ \$
Septum Bridge	CICGFP4272	42	72	\$	\$	\$	\$ \$
30" & larger Width Panels include	CICGFP4280	42	80	\$	\$	\$	\$ \$
Rigid Wireway with Raceway Cover with four access doors (covers	CICGFP4854	48	54	\$	\$	\$	\$ \$
included) & Septum Bridge	CICGFP4866	48	66	\$	\$	\$	\$ \$
 42" & wider panels have a third vertical 	CICGFP4872	48	72	\$	\$	\$	\$ \$
support to add rigidity and tip-over resistance	CICGFP4880	48	80	\$	\$	\$	\$ \$
 Allows cable management access 							

CLASSIC XXI

- Assemble and disassemble 'modules' with segmented and stackable panels assembled in any combination, allowing on-module and off-module accessories matching OFG System
- · Accommodates all standard types of cables, easily customized and accessed in the steel frame with "U" channels for laid management
- Solid panel construction can support worksurfaces, shelves and overhead cabinets all 'on-module'
- Overall panel thickness is 2.5" comprised of panel raceway, trim rails, trim and finish
- Constructed of metal frame, aluminum septum and fiberglass sandwiched between expanded metal, covered with fiberglass and fabric
- · Panel raceway is made of 12-gauge steel pan offering support housing to give the panel rigidity and panel-topanel connections
- · Trim rails are extruded aluminum secured by pre-formed flanges, allowing placement of hang-on (onmodule) components in 1" vertical increments
- Trim is made of rigid material either metal powder-coated (metal) or polypropylene color (plastic) with a press-fit design
- Upholstery finish is held in place by elastic extruded spline rolled into welting groove and field replaceable

TO ORDER:

Select the product number and then add the codes for Trim Style, Color Selection, Fabric Option and Base Configuration.

For example, to order a Classic XXI 24" x 54" Standard Raceway Fabric Acoustic Panel (CICGFP2454), w/ PVC Plastic Trim Style (P), Black Plastic Color (B) 8066 Pewter Interlude Fabric (8066) and Universal 10-wire, 6-2-2 (T6), select:

Trim Style				
M Metal (Metal Powder-Coat Finish)				
Р	PVC Plastic			

(if product contains add	Selection ditional components with a lection will be matched)
Plastic Trim Style	Metal Trim Style
Black (B)	Black (27)
Grey (G)	Gray (29)
Linkton (I)	Light Tone (32)
Light Tone (L)	Cottonwood (35)
Sand (S)	Sand (28)
Warm Grey (W)	Warm Gray (33)
	Starlight Silver (B)

around the entire perimeter of the panel

Included glides offering 3-1/2" vertical adjustment (minimum of two)

	Trim Style Fabric Option			
Base Configuration (see Upcharge Pricing)				
TN	Universal non-powered			
T4	Universal 10-wire, 4-4-2			
T6	Universal 10-Wire, 6-2-2			

Color Selection

P B 8066 T6

Base Configuration

Product Number

CICGFP2454

- · Product dimensions are given in approximate inches
- · Appearance of product may vary from descriptions
- When ordering Fabric Panels, the higher grade value will determine the price auote
- Power accessories and Vertical posts are sold separately

 Noise Reduction Coefficient is based
- on the test method ASTM C-423
- Review finish options on pg. 76, Or see OFG Finish and Upholstery Card



Panel • Glass

Base Product (CIEGFP) Assembled View

				F	abric Pricir		arges
DESCRIPTION	PRODUCT NUMBER	WIDTH		Grade A	Grade B	Grade C	Т6
Extended Raceway Glass/Fabric	CIEGFP2458	24	58	\$	\$	\$	\$ \$
Panel	CIEGFP2466	24	66	\$	\$	\$	\$ \$
	CIEGFP2470	24	70	\$	\$	\$	\$ \$
Fabric finish at 33" high & lower	CIEGFP2476	24	76	\$	\$	\$	\$ \$
Painted aluminum frame with 1/4" thick	CIEGFP2484	24	84	\$	\$	\$	\$ \$
glass above 33" high (see options)	CIEGFP3058	30	58	\$	\$	\$	\$ \$
Powered and non-powered versions	CIEGFP3066	30	66	\$	\$	\$	\$ \$
available (see base configuration upgrade kit)	CIEGFP3070	30	70	\$	\$	\$	\$ \$
8" raceway features two 4" tall wireways	CIEGFP3076	30	76	\$	\$	\$	\$ \$
separated by a continuous steel septum	CIEGFP3084	30	84	\$	\$	\$	\$ \$
for routing data/communication cables, and with the purchase of T4/T6 Base	CIEGFP3658	36	58	\$	\$	\$	\$ \$
Configuration Kit additional items are	CIEGFP3666	36	66	\$	\$	\$	\$ \$
included	CIEGFP3670	36	70	\$	\$	\$	\$ \$
Powered Base Configuration Kit North Configuration Configuration	CIEGFP3676	36	76	\$	\$	\$	\$ \$
contents will vary by Panel Width (see below)	CIEGFP3684	36	84	\$	\$	\$	\$ \$
24" Width Panels include Rigid	CIEGFP4258	42	58	\$	\$	\$	\$ \$
Wireway with Raceway Cover with	CIEGFP4266	42	66	\$	\$	\$	\$ \$
two access doors (covers included) & Septum Bridge	CIEGFP4270	42	70	\$	\$	\$	\$ \$
30" & larger Width Panels include	CIEGFP4276	42	76	\$	\$	\$	\$ \$
Rigid Wireway with Raceway Cover	CIEGFP4284	42	84	\$	\$	\$	\$ \$
with four access doors (covers included) & Septum Bridge	CIEGFP4858	48	58	\$	\$	\$	\$ \$
42" & wider panels have a third vertical	CIEGFP4866	48	66	\$	\$	\$	\$ \$
support to add rigidity and tip-over	CIEGFP4870	48	70	\$	\$	\$	\$ \$
resistance	CIEGFP4876	48	76	\$	\$	\$	\$ \$
Allows cable management access around the entire perimeter of the panel	CIEGFP4884	48	84	\$	\$	\$	\$ \$

CLASSIC XXI

- Assemble and disassemble 'modules' with segmented and stackable panels assembled in any combination, allowing on-module and off-module accessories matching OFG System
- · Accommodates all standard types of cables, easily customized and accessed in the steel frame with "U" channels for laid management
- Solid panel construction can support worksurfaces, shelves and overhead cabinets all 'on-module'
- Overall panel thickness is 2.5" comprised of panel raceway, trim rails, trim and finish
- Constructed of metal frame, aluminum septum and fiberglass sandwiched between expanded metal, covered with fiberglass and fabric
- · Panel raceway is made of 12-gauge steel pan offering support housing to give the panel rigidity and panel-topanel connections
- · Trim rails are extruded aluminum secured by pre-formed flanges, allowing placement of hang-on (onmodule) components in 1" vertical increments
- Trim is made of rigid material either metal powder-coated (metal) or polypropylene color (plastic) with a press-fit design
- Upholstery finish is held in place by elastic extruded spline rolled into welting groove and field replaceable

TO ORDER:

Select the product number and then add the codes for Trim Style, Color Selection, Fabric Option and Base Configuration.

For example, to order a Classic XXI 24" x 58" Extended Raceway Half Glass/Half Fabric Panel (CIEGFP2458), w/ PVC Plastic Trim Style (P), Black Plastic Color (B) 8066 Pewter Interlude Fabric (8066) and Universal 10-wire, 6-2-2 (T6), select:

Included glides offering 3-1/2" vertical adjustment (minimum of two)

Trim Style		
М	Metal (Metal Powder-Coat Finish)	
Р	PVC Plastic	

Color Selection (if product contains additional components with color option, the selection will be matched)				
Plastic Trim Style	Metal Trim Style			
Black (B)	Black (27)			
Grey (G)	Gray (29)			
Linkton (I)	Light Tone (32)			
Light Tone (L)	Cottonwood (35)			
Sand (S)	Sand (28)			
Warm Grey (W)	Warm Gray (33)			
	Starlight Silver (B)			

Fabric Option See OFG Upholstery Card for offerings.

CIEG	FP2458	P B 8066 T6 Tim Style Fabric Option
		ase Configuration e Upcharge Pricing)
-	TN	Universal non-powered
	T4	Universal 10-wire, 4-4-2
	Т6	Universal 10-Wire, 6-2-2

Color Selection Base Configuration

Product Number

- · Product dimensions are given in approximate inches
- · Appearance of product may vary from descriptions
- When ordering Fabric Panels, the higher grade value will determine the price auote
- Power accessories and Vertical posts are sold separately

 Noise Reduction Coefficient is based
- on the test method ASTM C-423
- Review finish options on pg. 76, Or see OFG Finish and Upholstery Card



Base Product (CICOFP) Assembled View

PRODUCT NUMBER							
- NOTE -	WIDTH		Grade A	Grade B	Grade C		
CICOFP2454	24	54	\$	\$	\$	\$	\$
CICOFP2462	24	62	\$	\$	\$	\$	\$
CICOFP2466	24	66	\$	\$	\$	\$	\$
CICOFP2472	24	72	\$	\$	\$	\$	\$
CICOFP2480	24	80	\$	\$	\$	\$	\$
CICOFP3054	30	54	\$	\$	\$	\$	\$
CICOFP3062	30	62	\$	\$	\$	\$	\$
CICOFP3066	30	66	\$	\$	\$	\$	\$
CICOFP3072	30	72	\$	\$	\$	\$	\$
CICOFP3080	30	80	\$	\$	\$	\$	\$
CICOFP3654	36	54	\$	\$	\$	\$	\$
CICOFP3662	36	62	\$	\$	\$	\$	\$
CICOFP3666	36	66	\$	\$	\$	\$	\$
CICOFP3672	36	72	\$	\$	\$	\$	\$
CICOFP3680	36	80	\$	\$	\$	\$	\$
CICOFP4254	42	54	\$	\$	\$	\$	\$
CICOFP4262	42	62	\$	\$	\$	\$	\$
CICOFP4266	42	66	\$	\$	\$	\$	\$
CICOFP4272	42	72	\$	\$	\$	\$	\$
CICOFP4280	42	80	\$	\$	\$	\$	\$
CICOFP4854	48	54	\$	\$	\$	\$	\$
CICOFP4862	48	62	\$	\$	\$	\$	\$
CICOFP4866	48	66	\$	\$	\$	\$	\$
CICOFP4872	48	72	\$	\$	\$	\$	\$
CICOFP4880	48	80	\$	\$	\$	\$	\$
	CICOFP2462 CICOFP2466 CICOFP2466 CICOFP2472 CICOFP2480 CICOFP3054 CICOFP3062 CICOFP3066 CICOFP3072 CICOFP3654 CICOFP3662 CICOFP3666 CICOFP3662 CICOFP3660 CICOFP3672 CICOFP3680 CICOFP4254 CICOFP4262 CICOFP4266 CICOFP4264 CICOFP4266 CICOFP4272 CICOFP4280 CICOFP4864 CICOFP4866 CICOFP4866 CICOFP4872	CICOFP2462 24 CICOFP2466 24 CICOFP2472 24 CICOFP2480 24 CICOFP3054 30 CICOFP3062 30 CICOFP3066 30 CICOFP3072 30 CICOFP3080 30 CICOFP3080 30 CICOFP3664 36 CICOFP3665 36 CICOFP3662 36 CICOFP3666 36 CICOFP3666 36 CICOFP3660 36 CICOFP3672 36 CICOFP3680 36 CICOFP4264 42 CICOFP4254 42 CICOFP4264 42 CICOFP4265 42 CICOFP4265 42 CICOFP4266 42 CICOFP4266 42 CICOFP4272 42 CICOFP4280 42 CICOFP4866 48 CICOFP4866 48 CICOFP4866 48 CICOFP4866 48	CICOFP2462 24 62 CICOFP2466 24 66 CICOFP2472 24 72 CICOFP2480 24 80 CICOFP3054 30 54 CICOFP3062 30 62 CICOFP3066 30 66 CICOFP3072 30 72 CICOFP3080 30 80 CICOFP3654 36 54 CICOFP3662 36 62 CICOFP3666 36 66 CICOFP3662 36 62 CICOFP3680 36 80 CICOFP3680 36 80 CICOFP3664 42 62 CICOFP4254 42 54 CICOFP4266 42 66 CICOFP4272 42 72 CICOFP4280 42 80 CICOFP4280 42 80 CICOFP4862 48 62 CICOFP4866 48 66 CICOFP4866 48 66 CICOFP4866 48 66 CICOFP4866 48 66 CICOFP4872 48 72	CICOFP2462 24 62 \$ CICOFP2466 24 66 \$ CICOFP2472 24 72 \$ CICOFP2480 24 80 \$ CICOFP3054 30 54 \$ CICOFP3062 30 62 \$ CICOFP3066 30 66 \$ CICOFP3072 30 72 \$ CICOFP3080 30 80 \$ CICOFP3654 36 54 \$ CICOFP3662 36 62 \$ CICOFP3666 36 66 \$ CICOFP3662 36 62 \$ CICOFP3666 36 66 \$ CICOFP3664 36 54 \$ CICOFP3666 36 66 \$ CICOFP3666 36 66 \$ CICOFP3666 36 66 \$ CICOFP3666 36 66 \$ CICOFP3666 42 54 \$ CICOFP4264 42 54 \$ CICOFP4266 42 66 \$ CICOFP4266 42 66 \$ CICOFP4272 42 72 \$ CICOFP4280 42 80 \$ CICOFP4866 48 66 \$ CICOFP4872 48 72 \$	CICOFP2462 24 62 \$ \$ CICOFP2466 24 66 \$ \$ \$ CICOFP2472 24 72 \$ \$ CICOFP2480 24 80 \$ \$ \$ CICOFP3054 30 54 \$ \$ \$ CICOFP3062 30 62 \$ \$ \$ \$ CICOFP3066 30 66 \$ \$ \$ \$ CICOFP3072 30 72 \$ \$ \$ \$ CICOFP3080 30 80 \$ \$ \$ \$ CICOFP3066 36 66 \$ \$ \$ \$ \$ \$ CICOFP3066 36 66 \$ \$ \$ \$ \$ \$ \$ CICOFP3066 36 66 \$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$	CICOFP2462 24 62 \$ \$ \$ \$ CICOFP2466 24 66 \$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$	CICOFP2462

CLASSIC XXI

- Assemble and disassemble 'modules' with segmented and stackable panels assembled in any combination, allowing on-module and off-module accessories matching OFG System
- Accommodates all standard types of cables, easily customized and accessed in the steel frame with "U" channels for laid management
- Solid panel construction can support worksurfaces, shelves and overhead cabinets all 'on-module'
- Overall panel thickness is 2.5" comprised of panel raceway, trim rails, trim and finish
- Constructed of metal frame, aluminum septum and fiberglass sandwiched between expanded metal, covered with fiberglass and fabric
- Panel raceway is made of 12-gauge steel pan offering support housing to give the panel rigidity and panel to panel connections
- Trim rails are extruded aluminum secured by pre-formed flanges, allowing placement of hang-on (onmodule) components in 1" vertical increments
- Trim is made of rigid material either metal powder-coated (metal) or polypropylene color (plastic) with a press-fit design
- Upholstery finish is held in place by elastic extruded spline rolled into welting groove and field replaceable

TO ORDER: Select the product number and then add the codes for Trim Style, Color Selection, Fabric Option and Base Configuration.

For example, to order a Classic XXI 24" x 54" Standard Raceway Open/Fabric Panel (CICOFP2454), w/ PVC Plastic Trim Style (P), Black Plastic Color (B), 8066 Pewter Interlude Fabric (8066) and Universal 10-wire, 6-2-2 (T6), select:

Trim Style		
М	Metal (Metal Powder-Coat Finish)	
Р	PVC Plastic	

(if product contains add	Selection ditional components with a lection will be matched)
Plastic Trim Style	Metal Trim Style
Black (B)	Black (27)
Grey (G)	Gray (29)
LinkTon (I)	Light Tone (32)
Light Tone (L)	Cottonwood (35)
Sand (S)	Sand (28)
Warm Grey (W)	Warm Gray (33)
	Starlight Silver (B)

Fabric Option	
See OFG Upholstery Card for offerings.	
Sec of a springery start of one light.	

	·
	iguration ge Pricing)
Universal non-p	powered
Universal 10-wi	re, 4-4-2
Universal 10-W	fire, 6-2-2
	Case Confee Upchar Universal non-p Universal 10-wi

Color Selection

Base Configuration

8066 T6

Product Number

CICOFP2454

- Product dimensions are given in approximate inches
- · Appearance of product may vary
- from descriptions

 When ordering Fabric Panels, the higher grade value will determine the price quote
 • Power accessories and Vertical posts
- Noise Reduction Coefficient is based on the test method ASTM C-423
- Review finish options on pg. 76, Or see OFG Finish and Upholstery Card





_				F			arges
DESCRIPTION	PRODUCT NUMBER	WIDTH		Grade A	Grade B	Grade C	T6
Extended Raceway Open/Fabric	CIECOFP2458	24	58	\$	\$	\$	\$ \$
Panel	CIECOFP2466	24	66	\$	\$	\$	\$ \$
	CIECOFP2470	24	70	\$	\$	\$	\$ \$
Fabric finish at 29" high & lower	CIECOFP2476	24	76	\$	\$	\$	\$ \$
Painted aluminum frame above 29" high	CIECOFP2484	24	84	\$	\$	\$	\$ \$
Powered and non-powered versions	CIECOFP3058	30	58	\$	\$	\$	\$ \$
available (see base configuration	CIECOFP3066	30	66	\$	\$	\$	\$ \$
upgrade kit)	CIECOFP3070	30	70	\$	\$	\$	\$ \$
 8" raceway features two 4" tall wireways separated by a continuous steel septum 	CIECOFP3076	30	76	\$	\$	\$	\$ \$
for routing data/communication cables,	CIECOFP3084	30	84	\$	\$	\$	\$ \$
and with the purchase of T4/T6 Base Configuration Kit additional items are	CIECOFP3658	36	58	\$	\$	\$	\$ \$
included	CIECOFP3666	36	66	\$	\$	\$	\$ \$
Powered Base Configuration Kit	CIECOFP3670	36	70	\$	\$	\$	\$ \$
contents will vary by Panel Width	CIECOFP3676	36	76	\$	\$	\$	\$ \$
(see below) 24" Width Panels include Rigid	CIECOFP3684	36	84	\$	\$	\$	\$ \$
Wireway with Raceway Cover with	CIECOFP4258	42	58	\$	\$	\$	\$ \$
two access doors (covers included) &	CIECOFP4266	42	66	\$	\$	\$	\$ \$
Septum Bridge	CIECOFP4270	42	70	\$	\$	\$	\$ \$
30" & larger Width Panels include Rigid Wireway with Raceway Cover	CIECOFP4276	42	76	\$	\$	\$	\$ \$
with four access doors (covers	CIECOFP4284	42	84	\$	\$	\$	\$ \$
included) & Septum Bridge	CIECOFP4858	48	58	\$	\$	\$	\$ \$
 42" & wider panels have a third vertical support to add rigidity and tip-over 	CIECOFP4866	48	66	\$	\$	\$	\$ \$
resistance	CIECOFP4870	48	70	\$	\$	\$	\$ \$
Allows cable management access	CIECOFP4876	48	76	\$	\$	\$	\$ \$
around the entire perimeter of the panel	CIECOFP4884	48	84	\$	\$	\$	\$ \$
 Included glides offering 3-1/2" vertical 							

CLASSIC XXI

- Assemble and disassemble 'modules' with segmented and stackable panels assembled in any combination, allowing on-module and off-module accessories matching OFG System
- Accommodates all standard types of cables, easily customized and accessed in the steel frame with "U" channels for laid management
- Solid panel construction can support worksurfaces, shelves and overhead cabinets all 'on-module'
- Overall panel thickness is 2.5" comprised of panel raceway, trim rails, trim and finish
- Constructed of metal frame, aluminum septum and fiberglass sandwiched between expanded metal, covered with fiberglass and fabric
- · Panel raceway is made of 12-gauge steel pan offering support housing to give the panel rigidity and panel-topanel connections
- · Trim rails are extruded aluminum secured by pre-formed flanges, allowing placement of hang-on (onmodule) components in 1" vertical increments
- Trim is made of rigid material either metal powder-coated (metal) or polypropylene color (plastic) with a press-fit design
- Upholstery finish is held in place by elastic extruded spline rolled into welting groove and field replaceable

TO ORDER:

Select the product number and then add the codes for Trim Style, Color Selection, Fabric Option and Base Configuration.

For example, to order a Classic XXI 24" x 54" Extended Raceway Open/Fabric Panel (CIECOFP2454), w/ PVC Plastic Trim Style (P), Black Plastic Color (B), 8066 Pewter Interlude Fabric (8066) and Universal 10-wire, 6-2-2 (T6), select:

adjustment (minimum of two)

	Trim Style
М	Metal (Metal Powder-Coat Finish)
Р	PVC Plastic

(if product contains add	Selection ditional components with a ection will be matched)
Plastic Trim Style	Metal Trim Style
Black (B)	Black (27)
Grey (G)	Gray (29)
Link Ton (II)	Light Tone (32)
Light Tone (L)	Cottonwood (35)
Sand (S)	Sand (28)
Marro Cros (AAA)	Warm Gray (33)
Warm Grey (W)	Starlight Silver (B)

Fabric Option See OFG Upholstery Card for offerings.

	 Trim Style	 Fabric Option
	ase Confi e Upcharç	guration ge Pricing)
TN	Universal non-p	owered
T4	Universal 10-wir	re, 4-4-2
Т6	Universal 10-Wi	re, 6-2-2

Color Selection

P B 8066 T6

Base Configuration


Product Number

CIECOFP2454

- · Product dimensions are given in approximate inches
- · Appearance of product may vary
- from descriptions

 When ordering Fabric Panels, the higher grade value will determine the price auote
- Power accessories and Vertical posts
- Noise Reduction Coefficient is based on the test method ASTM C-423
- Review finish options on pg. 76, Or see OFG Finish and Upholstery Card





Base Product (CIBOFP) Assembled View

					Fa	ıbric Prici	ng	arges
DESCRIPTION	PRODUCT NUMBER	WIDTH	Total Height	Opening Height	Grade A	Grade B	Grade C	
Standard Raceway Bottom Open	CIBOFP2448	24	48	18	\$	\$	\$	\$ \$
Frame Panel	CIBOFP2454	24	54	20	\$	\$	\$	\$ \$
	CIBOFP2462	24	62	21	\$	\$	\$	\$ \$
Used when panels will cover items on	CIBOFP2466	24	66	24	\$	\$	\$	\$ \$
the building wall that need to be	CIBOFP2472	24	72	24	\$	\$	\$	\$ \$
accessed (heating, A/C, data and electrical boxes)	CIBOFP2480	24	80	26	\$	\$	\$	\$ \$
Painted aluminum frame on the bottom	CIBOFP3048	30	48	18	\$	\$	\$	\$ \$
half, the top half has a fabric finish	CIBOFP3054	30	54	20	\$	\$	\$	\$ \$
 Powered and non-powered versions 	CIBOFP3062	30	62	21	\$	\$	\$	\$ \$
available (see base configuration upgrade kit)	CIBOFP3066	30	66	24	\$	\$	\$	\$ \$
4" tall wireway for routing data/	CIBOFP3072	30	72	24	\$	\$	\$	\$ \$
communication cables, separated by a	CIBOFP3080	30	80	26	\$	\$	\$	\$ \$
continuous steel septum with purchase	CIBOFP3648	36	48	18	\$	\$	\$	\$ \$
of T4/T6 Base Configuration Powered Base Configuration Kit	CIBOFP3654	36	54	20	\$	\$	\$	\$ \$
contents will vary by Panel Width	CIBOFP3662	36	62	21	\$	\$	\$	\$ \$
(see below)	CIBOFP3666	36	66	24	\$	\$	\$	\$ \$
24" Width Panels include Rigid	CIBOFP3672	36	72	24	\$	\$	\$	\$ \$
Wireway with Raceway Cover with two access doors (covers included) &	CIBOFP3680	36	80	26	\$	\$	\$	\$ \$
Septum Bridge	CIBOFP4248	42	48	18	\$	\$	\$	\$ \$
30" & larger Width Panels include	CIBOFP4254	42	54	20	\$	\$	\$	\$ \$
Rigid Wireway with Raceway Cover with four access doors (covers	CIBOFP4262	42	62	21	\$	\$	\$	\$ \$
included) & Septum Bridge	CIBOFP4266	42	66	24	\$	\$	\$	\$ \$
 42" & wider panels have a third vertical 	CIBOFP4272	42	72	24	\$	\$	\$	\$ \$
support to add rigidity and tip-over resistance	CIBOFP4280	42	80	26	\$	\$	\$	\$ \$
Allows cable management access	CIBOFP4848	48	48	18	\$	\$	\$	\$ \$
around the entire perimeter of the panel	CIBOFP4854	48	54	20	\$	\$	\$	\$ \$
 Included glides offering 3-1/2" vertical 	CIBOFP4862	48	62	21	\$	\$	\$	\$ \$
adjustment (minimum of two)	CIBOFP4866	48	66	24	\$	\$	\$	\$ \$
	CIBOFP4872	48	72	24	\$	\$	\$	\$ \$
	CIBOFP4880	48	80	26	\$	\$	\$	\$ \$

CLASSIC XXI

- Assemble and disassemble 'modules' with segmented and stackable panels assembled in any combination, allowing on-module and off-module accessories matching OFG System
- Accommodates all standard types of cables, easily customized and accessed in the steel frame with "U" channels for laid management
- Solid panel construction can support worksurfaces, shelves and overhead cabinets all 'on-module'
- Overall panel thickness is 2.5" comprised of panel raceway, trim rails, trim and finish
- Constructed of metal frame, aluminum septum and fiberglass sandwiched between expanded metal, covered with fiberglass and fabric
- Panel raceway is made of 12-gauge steel pan offering support housing to give the panel rigidity and panel to panel connections
- Trim rails are extruded aluminum secured by pre-formed flanges, allowing placement of hang-on (onmodule) components in 1" vertical increments
- Trim is made of rigid material either metal powder-coated (metal) or polypropylene color (plastic) with a press-fit design
- Upholstery finish is held in place by elastic extruded spline rolled into welting groove and field replaceable

\downarrow CONTINUED ON NEXT PAGE \downarrow

TO ORDER:

Select the product number and then add the codes for Trim Style, Color Selection, Fabric Option and Base Configuration.

For example, to order a Classic XXI 24" x 42" Standard Raceway Bottom Open Frame Panel (CIBOFP2442), w/ PVC Plastic Trim Style (P), Black Plastic Color (B), 8066 Pewter Interlude Fabric (8066) and Universal 10-wire, 6-2-2 (T6), select:

	Trim Style
M	Metal (Metal Powder-Coat Finish)
Р	PVC Plastic

Color Selection (if product contains additional components with a color option, the selection will be matched)						
Plastic Trim Style	Metal Trim Style					
Black (B)	Black (27)					
Grey (G)	Gray (29)					
LinkTon (I)	Light Tone (32)					
Light Tone (L)	Cottonwood (35)					
Sand (S)	Sand (28)					
Marina Cray (MA)	Warm Gray (33)					
Warm Grey (W)	Starlight Silver (B)					

Fabric Option See OFG Upholstery Card for offerings.

	Trim Style Fabric Option
	Base Configuration te Upcharge Pricing)
TN	Universal non-powered
T4	Universal 10-wire, 4-4-2
T6	Universal 10-Wire, 6-2-2

Color Selection

P B 8066 T6

Base Configuration

Product Number

CIBOFP2442

- Product dimensions are given in approximate inches
- · Appearance of product may vary
- from descriptions

 When ordering Fabric Panels, the higher grade value will determine the price quote
 • Power accessories and Vertical posts
- Noise Reduction Coefficient is based on the test method ASTM C-423
- Review finish options on pg. 76, Or see OFG Finish and Upholstery Card



Powered Base Configuration Kit

contents will vary by Panel Width

... 54" & larger Width Panels include

included) & Septum Bridge

Allows cable management access


tip-over resistance

Rigid Wireway with Raceway Cover with four access doors (covers

Third vertical support to add rigidity and

around the entire perimeter of the panel

Included glides offering 3-1/2" vertical adjustment (minimum of two)



Base Product (CIBOFP) Assembled View

					Fa	abric Prici		arges
DESCRIPTION	PRODUCT NUMBER	WIDTH	Total Height	Opening Height	Grade A	Grade B	Grade C	T6
Standard Raceway Bottom Open	CIBOFP5448	54	48	18	\$	\$	\$	\$ \$
Frame Panel	CIBOFP5454	54	54	20	\$	\$	\$	\$ \$
	CIBOFP5462	54	62	21	\$	\$	\$	\$ \$
Used when panels will cover items on	CIBOFP5466	54	66	24	\$	\$	\$	\$ \$
the building wall that need to be	CIBOFP5472	54	72	24	\$	\$	\$	\$ \$
accessed (heating, A/C, data and electrical boxes)	CIBOFP5480	54	80	26	\$	\$	\$	\$ \$
Painted aluminum frame on the bottom	CIBOFP6048	60	48	18	\$	\$	\$	\$ \$
half, the top half has a fabric finish	CIBOFP6054	60	54	20	\$	\$	\$	\$ \$
 Powered and non-powered versions 	CIBOFP6062	60	62	21	\$	\$	\$	\$ \$
available (see base configuration upgrade kit)	CIBOFP6066	60	66	24	\$	\$	\$	\$ \$
4" tall wireway for routing data/	CIBOFP6072	60	72	24	\$	\$	\$	\$ \$
communication cables, separated by a	CIBOFP6080	60	80	26	\$	\$	\$	\$ \$
continuous steel septum with purchase of T4/T6 Base Configuration								

CLASSIC XXI

- Assemble and disassemble 'modules' with segmented and stackable panels assembled in any combination, allowing on-module and off-module accessories matching OFG System Finishes
- Accommodates all standard types of cables, easily customized and accessed in the steel frame with "U" channels for laid management
- Solid panel construction can support worksurfaces, shelves and overhead cabinets all 'on-module'
- Overall panel thickness is 2.5" comprised of panel raceway, trim rails, trim and finish
- Constructed of metal frame, aluminum septum and fiberglass sandwiched between expanded metal, covered with fiberglass and fabric
- Panel raceway is made of 12-gauge steel pan offering support housing to give the panel rigidity and panel-topanel connections
- Trim rails are extruded aluminum secured by pre-formed flanges, allowing placement of hang-on (onmodule) components in 1" vertical increments
- Trim is made of rigid material either metal powder-coated (metal) or polypropylene color (plastic) with a press-fit design
- Upholstery finish is held in place by elastic extruded spline rolled into welting groove and field replaceable

TO ORDER: Select the product number and then add the codes for Trim Style, Color Selection, Fabric Option and Base Configuration.

For example, to order a Classic XXI 54" x 42" Standard Raceway Bottom Open Frame Panel (CIBOFP2442), w/ PVC Plastic Trim Style (P), Black Plastic Color (B), 8066 Pewter Interlude Fabric (8066) and Universal 10-wire, 6-2-2 (T6), select:

	Trim Style
М	Metal (Metal Powder-Coat Finish)
Р	PVC Plastic

Color Selection (if product contains additional components with a color option, the selection will be matched)						
Plastic Trim Style	Metal Trim Style					
Black (B)	Black (27)					
Grey (G)	Gray (29)					
LinkTon (I)	Light Tone (32)					
Light Tone (L)	Cottonwood (35)					
Sand (S)	Sand (28)					
Marina Cray (MA)	Warm Gray (33)					
Warm Grey (W)	Starlight Silver (B)					

	Fabr	ic Opt	ion	
See OFG U	Jpholstery C	Card for off	erings.	

	Trim Style	Fabric Option
		nfiguration orge Pricing)
TN	Universal nor	n-powered
T4	Universal 10-	wire, 4-4-2
Т6	Universal 10-	Wire, 6-2-2

Color Selection

P B 8066 T6

Base Configuration


Product Number

CIBOFP5442

NOTES

- Product dimensions are given in approximate inches
- Appearance of product may vary from descriptions
- When ordering Fabric Panels, the higher grade value will determine the price quote
- Power accessories and Vertical posts
 resold separately.
- are sold separately
 Noise Reduction Coefficient is based on the test method ASTM C-423
- Review finish options on pg. 76, Or see OFG Finish and Upholstery Card





Base Product (CIBOFP) Assembled View

DESCRIPTION	PRODUCT NUMBER	WIDTH	Total Height	Opening Height	Grade A	Grade B	Grade C	
Extended Raceway Bottom Open	CIEBOFP2446	24	46	16	\$	\$	\$	\$ \$
Frame Panel	CIEBOFP2452	24	52	18	\$	\$	\$	\$ \$
	CIEBOFP2458	24	58	20	\$	\$	\$	\$ \$
Used when panels will cover items on	CIEBOFP2466	24	66	21	\$	\$	\$	\$ \$
the building wall that need to be	CIEBOFP2470	24	70	24	\$	\$	\$	\$ \$
accessed (heating, A/C, data and electrical boxes)	CIEBOFP2476	24	76	24	\$	\$	\$	\$ \$
Painted aluminum frame on the bottom	CIEBOFP2484	24	84	26	\$	\$	\$	\$ \$
half, the top half has a fabric finish	CIEBOFP3046	30	46	16	\$	\$	\$	\$ \$
 Powered and non-powered versions 	CIEBOFP3052	30	52	18	\$	\$	\$	\$ \$
available (see base configuration upgrade kit)	CIEBOFP3058	30	58	20	\$	\$	\$	\$ \$
8" raceway features two 4" tall wireways	CIEBOFP3066	30	66	21	\$	\$	\$	\$ \$
separated by a continuous steel septum	CIEBOFP3070	30	70	24	\$	\$	\$	\$ \$
for routing data/communication cables, and with the purchase of T4/T6 Base	CIEBOFP3076	30	76	24	\$	\$	\$	\$ \$
Configuration Kit additional items are	CIEBOFP3084	30	84	26	\$	\$	\$	\$ \$
included	CIEBOFP3646	36	46	16	\$	\$	\$	\$ \$
Powered Base Configuration Kit	CIEBOFP3652	36	52	18	\$	\$	\$	\$ \$
contents will vary by Panel Width (see below)	CIEBOFP3658	36	58	20	\$	\$	\$	\$ \$
24" Width Panels include Rigid	CIEBOFP3666	36	66	21	\$	\$	\$	\$ \$
Wireway with Raceway Cover with	CIEBOFP3670	36	70	24	\$	\$	\$	\$ \$
two access doors (covers included) & Septum Bridge	CIEBOFP3676	36	76	24	\$	\$	\$	\$ \$
30" & larger Width Panels include	CIEBOFP3684	36	84	26	\$	\$	\$	\$ \$
Rigid Wireway with Raceway Cover	CIEBOFP4246	42	46	16	\$	\$	\$	\$ \$
with four access doors (covers included) & Septum Bridge	CIEBOFP4252	42	52	18	\$	\$	\$	\$ \$
 42" & wider panels have a third vertical 	CIEBOFP4258	42	58	20	\$	\$	\$	\$ \$
support to add rigidity and tip-over	CIEBOFP4266	42	66	21	\$	\$	\$	\$ \$
resistance	CIEBOFP4270	42	70	24	\$	\$	\$	\$ \$
 Allows cable management access around the entire perimeter of the panel Included glides offering 3-1/2" vertical adjustment (minimum of two) 	CIEBOFP4276	42	76	24	\$	\$	\$	\$ \$
	CIEBOFP4284	42	84	26	\$	\$	\$	\$ \$
	CIEBOFP4846	48	46	16	\$	\$	\$	\$ \$
	CIEBOFP4852	48	52	18	\$	\$	\$	\$ \$
	CIEBOFP4858	48	58	20	\$	\$	\$	\$ \$
	CIEBOFP4866	48	66	21	\$	\$	\$	\$ \$
	CIEBOFP4870	48	70	24	\$	\$	\$	\$ \$
	CIEBOFP4876	48	76	24	\$	\$	\$	\$ \$
	CIEBOFP4884	48	84	26	\$	\$	\$	\$ \$

↓CONTINUED ON NEXT PAGE ↓

TO ORDER:

Select the product number and then add the codes for Trim Style, Color Selection, Fabric Option and Base Configuration.

For example, to order a Classic XXI 24" x 46" Extended Raceway Bottom Open Frame Panel (CIEBOFP2446), w/ PVC Plastic Trim Style (P), Black Plastic Color (B), 8066 Pewter Interlude Fabric (8066) and Universal 10-wire, 6-2-2 (T6), select:

Trim Style					
М	Metal (Metal Powder-Coat Finish)				
Р	PVC Plastic				

(if product contains add	Selection ditional components will lection will be matched)
Plastic Trim Style	Metal Trim Style
Black (B)	Black (27)
Grey (G)	Gray (29)
LinkTon (II)	Light Tone (32)
Light Tone (L)	Cottonwood (35)
Sand (S)	Sand (28)
,	Warm Gray (33)
Warm Grey (W)	Starlight Silver (B)

Fabric Option See OFG Upholstery Card for offerings.

	Trim Style Fabric Option
	Base Configuration te Upcharge Pricing)
TN	Universal non-powered
T4	Universal 10-wire, 4-4-2
Т6	Universal 10-Wire, 6-2-2

Color Selection Base Configuration

P B 8066 T6

Product Number

CIEBOFP2446

CLASSIC XXI

- Assemble and disassemble 'modules' with segmented and stackable panels assembled in any combination, allowing on-module and off-module accessories matching OFG System
- Accommodates all standard types of cables, easily customized and accessed in the steel frame with "U" channels for laid management
- Solid panel construction can support worksurfaces, shelves and overhead cabinets all 'on-module'
- Overall panel thickness is 2.5" comprised of panel raceway, trim rails, trim and finish
- Constructed of metal frame, aluminum septum and fiberglass sandwiched between expanded metal, covered with fiberglass and fabric
- Panel raceway is made of 12-gauge steel pan offering support housing to give the panel rigidity and panel-topanel connections
- Trim rails are extruded aluminum secured by pre-formed flanges, allowing placement of hang-on (onmodule) components in 1" vertical increments
- Trim is made of rigid material either metal powder-coated (metal) or polypropylene color (plastic) with a press-fit design
- Upholstery finish is held in place by elastic extruded spline rolled into welting groove and field replaceable

NOTES:

- Product dimensions are given in approximate inches
- · Appearance of product may vary from descriptions
- When ordering Fabric Panels, the higher grade value will determine the price auote
- Power accessories and Vertical posts
- Noise Reduction Coefficient is based on the test method ASTM C-423
- Review finish options on pg. 76, Or see OFG Finish and Upholstery Card



Panel • Access

Powered Base Configuration Kit contents will vary by Panel Width

... 54" & larger Width Panels include

with four access doors (covers

Allows cable management access around the entire perimeter of the panel

Included glides offering 3-1/2" vertical adjustment (minimum of two)

included) & Septum Bridge

Rigid Wireway with Raceway Cover

Third vertical support to add rigidity and

(see below)

tip-over resistance

Base Product (CIBOFP) Assembled View

					Fa	ıbric Prici		Upch	
DESCRIPTION	PRODUCT NUMBER	WIDTH	Total Height	Opening Height	Grade A	Grade B	Grade C		
Extended Raceway Bottom Open	CIEBOFP5446	54	46	16	\$	\$	\$	\$	\$
Frame Panel	CIEBOFP5452	54	52	18	\$	\$	\$	\$	\$
	CIEBOFP5458	54	58	20	\$	\$	\$	\$	\$
Used when panels will cover items on	CIEBOFP5466	54	66	21	\$	\$	\$	\$	\$
the building wall that need to be	CIEBOFP5470	54	70	24	\$	\$	\$	\$	\$
accessed (heating, A/C, data and electrical boxes) Painted aluminum frame on the bottom	CIEBOFP5476	54	76	24	\$	\$	\$	\$	\$
	CIEBOFP5484	54	84	26	\$	\$	\$	\$	\$
half, the top half has a fabric finish	CIEBOFP6046	60	46	16	\$	\$	\$	\$	\$
Powered and non-powered versions	CIEBOFP6052	60	52	18	\$	\$	\$	\$	\$
available (see base configuration	CIEBOFP6058	60	58	20	\$	\$	\$	\$	\$
 upgrade kit) 8" raceway features two 4" tall wireways separated by a continuous steel septum for routing data/communication cables, and with the purchase of T4/T6 Base Configuration Kit additional items are 	CIEBOFP6066	60	66	21	\$	\$	\$	\$	\$
	CIEBOFP6070	60	70	24	\$	\$	\$	\$	\$
	CIEBOFP6076	60	76	24	\$	\$	\$	\$	\$
	CIEBOFP6084	60	84	26	\$	\$	\$	\$	\$
included		•		•	,				

CLASSIC XXI

- Assemble and disassemble 'modules' with segmented and stackable panels assembled in any combination, allowing on-module and off-module accessories matching OFG System Finishes
- Accommodates all standard types of cables, easily customized and accessed in the steel frame with "U" channels for laid management
- Solid panel construction can support worksurfaces, shelves and overhead cabinets all 'on-module'
- Overall panel thickness is 2.5" comprised of panel raceway, trim rails, trim and finish
- Constructed of metal frame, aluminum septum and fiberglass sandwiched between expanded metal, covered with fiberglass and fabric
- Panel raceway is made of 12-gauge steel pan offering support housing to give the panel rigidity and panel-topanel connections
- Trim rails are extruded aluminum secured by pre-formed flanges, allowing placement of hang-on (onmodule) components in 1" vertical increments
- Trim is made of rigid material either metal powder-coated (metal) or polypropylene color (plastic) with a press-fit design
- Upholstery finish is held in place by elastic extruded spline rolled into welting groove and field replaceable

TO ORDER: Select the product number and then add the codes for Trim Style, Color Selection, Fabric Option and Base Configuration.

For example, to order a Classic XXI 54" x 46" Extended Raceway Bottom Open Frame Panel (CIEBOFP5446), w/ PVC Plastic Trim Style (P), Black Plastic Color (B), 8066 Pewter Interlude Fabric (8066) and Universal 10-wire, 6-2-2 (T6), select:

Trim Style					
М	Metal (Metal Powder-Coat Finish)				
Р	PVC Plastic				

(if product contains add	Selection ditional components with a lection will be matched)		
Plastic Trim Style	Metal Trim Style		
Black (B)	Black (27)		
Grey (G)	Gray (29)		
LinkTon (I)	Light Tone (32)		
Light Tone (L)	Cottonwood (35)		
Sand (S)	Sand (28)		
, ,	Warm Gray (33)		
Warm Grey (W)	Starlight Silver (B)		

	Fabric Option	
See OFG Up	pholstery Card for offerings.	

CIEBO	DFP5446	P B 8066 T6 Trim/Style Fabric Option
		ase Configuration e Upcharge Pricing)
-	TN	Universal non-powered
	T4	Universal 10-wire, 4-4-2
	Т6	Universal 10-Wire, 6-2-2

Color Selection Base Configuration


Product Number


NOTES

- Product dimensions are given in approximate inches
- Appearance of product may vary from descriptions
- When ordering Fabric Panels, the higher grade value will determine the price quote
- Power accessories and Vertical posts are sold separately
- Noise Reduction Coefficient is based on the test method ASTM C-423
- Review finish options on pg. 76, Or see OFG Finish and Upholstery Card




Overview • Panel Additions







Pg. 24







Rolling Screen (CIRSD) Pg. 25



Door Threshold (CIDRTH)

Pg. 25

CLASSIC XXI

- Assemble and disassemble 'modules' with segmented and stackable panels assembled in any combination, allowing on-module and off-module accessories matching OFG System
- Accommodates all standard types of cables, easily customized and accessed in the steel frame with "U" channels for laid management
- Solid panel construction can support worksurfaces, shelves and overhead cabinets all 'on-module'
- Overall panel thickness is 2.5" comprised of panel raceway, trim rails, trim and finish
- Constructed of metal frame, aluminum septum and fiberglass sandwiched between expanded metal, covered with fiberglass and fabric
- Panel raceway is made of 12-gauge steel pan offering support housing to give the panel rigidity and panel-topanel connections
- · Trim rails are extruded aluminum secured by pre-formed flanges, allowing placement of hang-on (onmodule) components in 1" vertical increments
- Trim is made of rigid material either metal powder-coated (metal) or polypropylene color (plastic) with a press-fit design
- Upholstery finish is held in place by elastic extruded spline rolled into welting groove and field replaceable

NOTES:

- · Product dimensions are given in approximate inches
- · Appearance of product may vary
- from descriptions

 When ordering Fabric Panels, the higher grade value will determine the price auote
- Power accessories and Vertical posts are sold separately
 Noise Reduction Coefficient is based on the test method ASTM C-423
- Review finish options on pg. 76, Or see OFG Finish and Upholstery Card



Panel Additions • Stackable



					Fabric Pricing	
DESCRIPTION	PRODUCT NUMBER	WIDTH		Grade A	Grade B	
Stackable Fabric Panel Section	CISPSF24S12	24	12	\$	\$	\$
Stackable Labrie Lation Section	CISPSF24S18	24	18	\$	\$	\$
	CISPSF24S24	24	24	\$	\$	\$
Aluminum frame with fiberglass and	CISPSF24S30	24	30	\$	\$	\$
fabric-covered fiberboard faces	CISPSF30S12	30	12	\$	\$	\$
Alignment brackets allow a stackable	CISPSF30S18	30	18	\$	\$	\$
section to slide onto an existing panel to increase the height	CISPSF30S24	30	24	\$	\$	\$
Stackable panel section may be	CISPSF30S30	30	30	\$	\$	\$
installed without removing existing panel	CISPSF36S12	36	12	\$	\$	\$
from the panel run	CISPSF36S18	36	18	\$	\$	\$
 Stackable panel sections are connected through single piece poly hinges 	CISPSF36S24	36	24	\$	\$	\$
 PVC H-spacer to match trim color 	CISPSF36S30	36	30	\$	\$	\$
included	CISPSF42S12	42	12	\$	\$	\$
 Product is UL 1286 listed 	CISPSF42S18	42	18	\$	\$	\$
	CISPSF42S24	42	24	\$	\$	\$
	CISPSF42S30	42	30	\$	\$	\$
	CISPSF48S12	48	12	\$	\$	\$
	CISPSF48S18	48	18	\$	\$	\$
	CISPSF48S24	48	24	\$	\$	\$
	CISPSF48S30	48	30	\$	\$	\$

CLASSIC XXI

- Assemble and disassemble 'modules' with segmented and stackable panels assembled in any combination, allowing on-module and off-module accessories matching OFG System
- Accommodates all standard types of cables, easily customized and accessed in the steel frame with "U" channels for laid management
- Solid panel construction can support worksurfaces, shelves and overhead cabinets all 'on-module'
- Overall panel thickness is 2.5" comprised of panel raceway, trim rails, trim and finish
- Constructed of metal frame, aluminum septum and fiberglass sandwiched between expanded metal, covered with fiberglass and fabric
- Panel raceway is made of 12-gauge steel pan offering support housing to give the panel rigidity and panel to panel connections
- · Trim rails are extruded aluminum secured by pre-formed flanges, allowing placement of hang-on (onmodule) components in 1" vertical increments
- Trim is made of rigid material either metal powder-coated (metal) or polypropylene color (plastic) with a press-fit design
- Upholstery finish is held in place by elastic extruded spline rolled into welting groove and field replaceable

NOTES:

- · Product dimensions are given in approximate inches
- · Appearance of product may vary
- from descriptions

 When ordering Fabric Panels, the higher grade value will determine the
- Power accessories and Vertical posts are sold separately
 Noise Reduction Coefficient is based on the test method ASTM C-423
- Review finish options on pg. 76, Or see OFG Finish and Upholstery Card

Fabric Option Product Number CISPSF24S12 B 8066 Color Selection

TO ORDER:

Select the product number and then add the codes for the Color Selection and Fabric Option.

For example, to order a Classic XXI 24" x 12" Stackable Fabric Panel Section (CISPSF24S12), w/ Black Plastic Color (B) and 8066 Pewter Interlude Fabric (8066), select:

Panel Additions • Stackable



DESCRIPTION	PRODUCT NUMBER	WIDTH	HEIGHT	PRICING
Stackable Glass Panel Section	CISPSG24S12	24	12	\$
Stackable Glace I alloi Geoticii	CISPSG24S18	24	18	\$
	CISPSG24S24	24	24	\$
Aluminum frame with fiberglass and	CISPSG24S30	24	30	\$
fabric-covered fiberboard faces	CISPSG30S12	30	12	\$
Alignment brackets allow a stackable	CISPSG30S18	30	18	\$
section to slide onto an existing panel to increase the height	CISPSG30S24	30	24	\$
Stackable panel section may be	CISPSG30S30	30	30	\$
installed without removing existing panel	CISPSG36S12	36	12	\$
from the panel run	CISPSG36S18	36	18	\$
 Stackable panel sections are connected through single piece poly hinges 	CISPSG36S24	36	24	\$
PVC H-spacer to match trim color	CISPSG36S30	36	30	\$
included	CISPSG42S12	42	12	\$
Product is UL 1286 listed	CISPSG42S18	42	18	\$
	CISPSG42S24	42	24	\$
	CISPSG42S30	42	30	\$
	CISPSG48S12	48	12	\$
	CISPSG48S18	48	18	\$
	CISPSG48S24	48	24	\$
	CISPSG48S30	48	30	\$

CLASSIC XXI

- Assemble and disassemble 'modules' with segmented and stackable panels assembled in any combination, allowing on-module and off-module accessories matching OFG System
- Accommodates all standard types of cables, easily customized and accessed in the steel frame with "U" channels for laid management
- Solid panel construction can support worksurfaces, shelves and overhead cabinets all 'on-module'
- Overall panel thickness is 2.5" comprised of panel raceway, trim rails, trim and finish
- Constructed of metal frame, aluminum septum and fiberglass sandwiched between expanded metal, covered with fiberglass and fabric
- Panel raceway is made of 12-gauge steel pan offering support housing to give the panel rigidity and panel-topanel connections
- · Trim rails are extruded aluminum secured by pre-formed flanges, allowing placement of hang-on (onmodule) components in 1" vertical increments
- Trim is made of rigid material either metal powder-coated (metal) or polypropylene color (plastic) with a press-fit design
- Upholstery finish is held in place by elastic extruded spline rolled into welting groove and field replaceable

TO ORI	DER: product number and then add the c	odes for the Color Selection and Glass Option.	Product Number Glass Option
For examp	ole, to order a Classic XXI 24" x 12' Glass (F), select:	Stackable Glass Panel Section (CISPSG24S12), w/ Black Plastic Color (B) and	CISPSG24S12 B F Catar Selection
	Glass Option		
С	Clear Tempered		
_			
Т	Tinted		
F	Frosted		

NOTES:

- Product dimensions are given in approximate inches
- · Appearance of product may vary
- from descriptions

 When ordering Fabric Panels, the higher grade value will determine the
- Power accessories and Vertical posts are sold separately
 Noise Reduction Coefficient is based as that that mathed ASTM C-423
- on the test method ASTM C-423
- Review finish options on pg. 76, Or see OFG Finish and Upholstery Card



Panel Additions • Door



DESCRIPTION	PRODUCT NUMBER	Swing Option	Panel Width	Panel Height	Door Width	Door Height	Lock	PRICE
Door	CIDRL42L	Left	42	80	34-3/4	80	Yes	\$
	CIDRL42N	Left	42	80	34-3/4	80	No	\$
Leaf and Frame (includes horizontal	CIDRR42L	Right	42	80	34-3/4	80	Yes	\$
rail and header assembly) are used with panels at 84" high	CIDRR42N	Right	42	80	34-3/4	80	No	\$
Laminate surface on door	CIEDRL42L	Left	42	84	34-3/4	84	Yes	\$
Locking and non-locking options	CIEDRL42N	Left	42	84	34-3/4	84	No	\$
Meets ADA requirements	CIEDRR42L	Right	42	84	34-3/4	84	Yes	\$
	CIEDRR42N	Right	42	84	34-3/4	84	No	\$

TO ORDER:

Select the product number and then add the codes for Color Selection and Laminate Option..

For example, to order a Classic XXI Left Swing Door with Lock (CIDRL42L) w/ Black Plastic Color (B) and Biltmore Cherry Laminate (4031), select:

Product Number	Laminate Option
CIDRL42L	B 4031
	Color Selection



DESCRIPTION	PRODUCT NUMBER	Panel Width	Panel Height	Screen Width	Screen Height	Screen	PRICING
Rolling Screen	CIRSD4266FHCCP3K	42	66 & taller	48	66	Clear	\$
	CIRSD4266FHCOP3K	42	66 & taller	48	66	Frosted	\$

- Fluted plastic screen with finish option
- Provides non-locking visual security
- Aluminum frame with plastic screen
- Acrylic wheels allow ease of travel across flooring
- Frame and mounting brackets powder-coated with selectable trim


Rolling Screen	CIRSD4266FHCCP3K	42	66 & taller	48	66	Clear	\$
	CIRSD4266FHCOP3K	42	66 & taller	48	66	Frosted	\$
Used with 66" or taller panel heights							

TO ORDER:

Select the product number and then add the codes for Screen Finish, Trim Style and Color Selection.

For example, to order a Classic XXI Rolling Screen with Frosted (Opal) Fluted Plastic (RSD), w/ PVC Plastic Trim Style (P) and Black Plastic Color (B), select:

Product Number	Trim Style
RSD	F B 34 Screen Option Metal Powder-Coat Finish



DESCRIPTION	PRODUCT NUMBER	LENGTH	DOOR OPENING	PRICING
Door Threshold	CIDRTH42	42	36	\$
Attaches to bottom of door frame Extruded aluminum door threshold with rubber seal strip				

TO ORDER:

Select the product number and then add the codes for Color Selection.

Base Product (CIDRTH)

For example, to order a Classic XXI 42" Door Threshold (CIDRTH42), w/ Black Plastic Color (B). select:

Product Number	
CIDRTH42 B	
Color Selection	

CLASSIC XXI


- Assemble and disassemble 'modules' with segmented and stackable panels assembled in any combination, allowing on-module and off-module accessories matching OFG System
- Accommodates all standard types of cables, easily customized and accessed in the steel frame with "U" channels for laid management
- Solid panel construction can support worksurfaces, shelves and overhead cabinets all 'on-module'
- Doorways are attached at 80" or 84" configurations and adjustable with carpet glides
- Recommended Door Installation: Install with the hinge side at a 90 degree corner, 3-way, 4-way or wall mount conditions
- · Meets ADA requirements with a 36" door width opening
- Door construction is corrugated cardboard honeycomb wrapped by hardwood stiles, MDF rails, faced with hardboard and covered with highpressure laminate with a powdercoated aluminum to match panel frames

- Product dimensions are given in approximate inches
- · Appearance of product may vary from descriptions
- When ordering Fabric Panels, the higher grade value will determine the price auote
- Power accessories and Vertical posts are sold separately
- · Noise Reduction Coefficient is based on the test method ASTM C-423
- Review finish options on pg. 76, Or see OFG Finish and Upholstery Card




25

OVERVIEW • Intersections



Panel End Cap (CIECP) Pg. 27



"T" Condition Panel End Cap (CICTC) Pq. 28



CTC Spacer Trim (CICTCS) Pg. 29




90° Corner Post (CICAUC) Pg. 30




 Accommodates all standard types of cables, easily customized and accessed in the steel frame with "U" channels for laid management Solid panel construction can support worksurfaces, shelves and overhead cabinets all 'on-module'

CLASSIC XXI

 Assemble and disassemble 'modules' with segmented and stackable panels assembled in any combination, allowing on-module and off-module accessories matching OFG System



"T" Condition Extended Raceway Cap (CIERCTC)




Pg. 32

Extended Raceway Spacer (CIERCTCS)



90° Extended Raceway Corner Pg. 33 Post (CIERCAC)



Wall Mount & Adjustable Wall Mount (CICWM & CICWMA)

Pg. 34



Panel Center Mount (CIPCM)

Pg. 35

Pg. 31

NOTES:

- Product dimensions are given in approximate inches
 Appearance of product may vary from descriptions
 When ordering Fabric Panels, the higher grade value will determine the
- Power accessories and Vertical posts are sold separately
 Noise Reduction Coefficient is based on the test method ASTM C-423
- Review finish options on pg. 76, Or see OFG Finish and Upholstery Card




Trim • Conditions

DESCRIPTION	PRODUCT NUMBER	Height	"A" Panel Height	PRICING
End Cap	CIECP32	32	32	\$
2.1.u - Gup	CIECP42	42	42	\$
	CIECP48	48	48	\$
Includes 2-1/2" deep end-of-run trim and	CIECP54	54	54	\$
top cap	CIECP62	62	62	\$
Purchase according to panel	CIECP66	66	66	\$
configurations	CIECP72	72	72	\$
	CIECP80	80	80	\$

CLASSIC XXI

- Assemble and disassemble 'modules' with segmented and stackable panels assembled in any combination, allowing on-module and off-module accessories matching OFG System
- Accommodates all standard types of cables, easily customized and accessed in the steel frame with "U" channels for laid management
- Solid panel construction can support worksurfaces, shelves and overhead cabinets all 'on-module'
- Same Universal Trim as Intersection Conditions
- Panel End Caps made from extruded rigid PVC cover end-of-run cap panels
- In-Line Variable Height Panel End Caps cover vertical posts when in-line panels are of different heights
- Condition Caps (2-way, 3-way and 4way) cover the gap that exists between panel conditions as 90 degree intersections





Panel End Caps

Panel End Cap Assembled View


TO ORDER:

Select the product number and then add the codes for Trim Style and Color Selection

For example, to order a Classic XXI 32" Panel End Cap (CIECP32), w/ PVC Plastic Trim Style (P) and Black Plastic Color (B), select:

Trim Style				
М	Metal (Metal Powder-Coat Finish)			
Р	PVC Plastic			

Color Selection (if product contains additional components with a color option, the selection will be matched)				
Plastic Trim Style	Metal Trim Style			
Black (B)	Black (27)			
Grey (G)	Gray (29)			
Link Ton (I)	Light Tone (32)			
Light Tone (L)	Cottonwood (35)			
Sand (S)	Sand (28)			
Warm Grey (W)	Warm Gray (33)			
	Starlight Silver (B)			




- · Product dimensions are given in
- approximate inches

 Appearance of product may vary
- from descriptions

 When ordering Fabric Panels, the higher grade value will determine the price quote
 • Power accessories and Vertical posts
- Noise Reduction Coefficient is based on the test method ASTM C-423
- Review finish options on pg. 76, Or see OFG Finish and Upholstery Card



Trim • Conditions for Standard Raceways

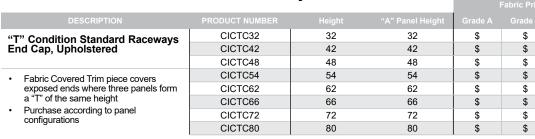

CLASSIC XXI

Assemble and disassemble 'modules' with segmented and stackable panels assembled in any combination, allowing on-module and off-module accessories matching OFG System

\$

\$

\$

\$

\$

\$


\$

\$

- Accommodates all standard types of cables, easily customized and accessed in the steel frame with "U" channels for laid management
- Solid panel construction can support worksurfaces, shelves and overhead cabinets all 'on-module'
- Same Universal Trim as Intersection Conditions
- · Panel End Caps made from extruded rigid PVC cover end-of-run cap panels
- In-Line Variable Height Panel End Caps cover vertical posts when in-line panels are of different heights
- Condition Caps (2-way, 3-way and 4way) cover the gap that exists between panel conditions as 90 degree intersections



"T" Condition Panel End Cap Presentation View



"T" Condition Panel End Cap

TO ORDER: Select the product number and then add the codes for Trim Style, Color Selection and Fabric Option.

For example, to order a Classic XXI 32" "T" Condition Panel End Cap, Upholstered (CICTC32), w/ PVC Plastic Trim Style (P), Black Plastic Color (B) and 8066 Pewter Interlude Fabric (8066), select:

Trim Style		
М	Metal (Metal Powder-Coat Finish)	
P	PVC Plastic	

Color Selection (if product contains additional components with a color option, the selection will be matched)		
Plastic Trim Style	Metal Trim Style	
Black (B)	Black (27)	
Grey (G)	Gray (29)	
LinkTon (I)	Light Tone (32)	
Light Tone (L)	Cottonwood (35)	
Sand (S)	Sand (28)	
14/ 0 440	Warm Gray (33)	
Warm Grey (W)	Starlight Silver (B)	

	Fabri	c Opt	ion	
See OFG L	lpholstery C	ard for off	erings.	

Color Selection

B 8066

Fabric Option

Product Number


CICTC32

- Product dimensions are given in approximate inches
- · Appearance of product may vary from descriptions
- When ordering Fabric Panels, the higher grade value will determine the price auote
- Power accessories and Vertical posts are sold separately

 Noise Reduction Coefficient is based
- on the test method ASTM C-423
- Review finish options on pg. 76, Or see OFG Finish and Upholstery Card




Trim • Conditions for Standard Raceways

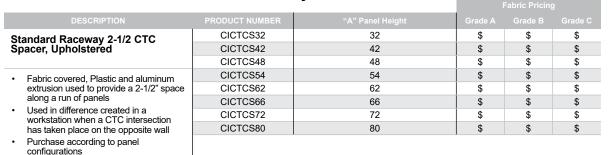


CLASSIC XXI

- Assemble and disassemble 'modules' with segmented and stackable panels assembled in any combination, allowing on-module and off-module accessories matching OFG System
- Accommodates all standard types of cables, easily customized and accessed in the steel frame with "U" channels for laid management
- Solid panel construction can support worksurfaces, shelves and overhead cabinets all 'on-module'
- Same Universal Trim as Intersection Conditions
- · Panel End Caps made from extruded rigid PVC cover end-of-run cap panels
- In-Line Variable Height Panel End Caps cover vertical posts when in-line panels are of different heights
- Condition Caps (2-way, 3-way and 4way) cover the gap that exists between panel conditions as 90 degree intersections



CTC Spacer Presentation View



TO ORDER: Select the product number and then add the codes for Trim Style, Color Selection and Fabric Option.

For example, to order a Classic XXI 32" 2-1/2" CTC Spacer, Upholstered (CICTCS32), w/ PVC Plastic Trim Style (P), Black Plastic Color (B) and 8066 Pewter Interlude Fabric (8066), select:

Trim Style		
М	Metal (Metal Powder-Coat Finish)	
Р	PVC Plastic	

(if product contains add	Selection ditional components with a lection will be matched)
Plastic Trim Style	Metal Trim Style
Black (B)	Black (27)
Grey (G)	Gray (29)
Link Ton (II)	Light Tone (32)
Light Tone (L)	Cottonwood (35)
Sand (S)	Sand (28)
14/ 0 040	Warm Gray (33)
Warm Grey (W)	Starlight Silver (B)

	Fabric Opt	ion
See OFG U	oholstery Card for off	erings.

Color Selection

B 8066

Fabric Option

Product Number


CICTCS32

- Product dimensions are given in approximate inches
- · Appearance of product may vary from descriptions
- When ordering Fabric Panels, the higher grade value will determine the price auote
- Power accessories and Vertical posts are sold separately

 Noise Reduction Coefficient is based
- on the test method ASTM C-423
- Review finish options on pg. 76, Or see OFG Finish and Upholstery Card



Trim • Conditions for Standard Raceways

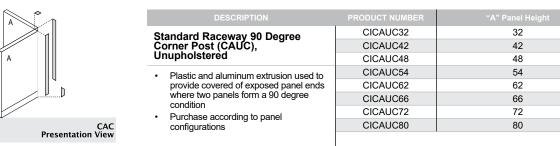

CAC

Assembled View

			1		
DESCRIPTION	PRODUCT NUMBER	"A" Panel Height	Grade A	Grade B	
Standard Raceway 90 Degree	CICAC32	32	\$	\$	\$
Standard Raceway 90 Degree Corner Post (CAC), Upholstered	CICAC42	42	\$	\$	\$
	CICAC48	48	\$	\$	\$
Fabric covered, plastic and aluminum extrusion used to provide a 2-1/2" space along a run of panels Used in difference created in a workstation when a CTC intersection	CICAC54	54	\$	\$	\$
	CICAC62	62	\$	\$	\$
	CICAC66	66	\$	\$	\$
	CICAC72	72	\$	\$	\$
has taken place on the opposite wall	CICAC80	80	\$	\$	\$
Purchase according to panel					

CLASSIC XXI

Assemble and disassemble 'modules' with segmented and stackable panels assembled in any combination, allowing on-module and off-module accessories matching OFG System

\$

\$

\$

\$

\$

\$

\$

\$

Color Selection

B 8066

Fabric Option

Product Number

CICAC32

- Accommodates all standard types of cables, easily customized and accessed in the steel frame with "U" channels for laid management
- Solid panel construction can support worksurfaces, shelves and overhead cabinets all 'on-module'
- Same Universal Trim as Intersection Conditions
- · Panel End Caps made from extruded rigid PVC cover end-of-run cap panels
- In-Line Variable Height Panel End Caps cover vertical posts when in-line panels are of different heights
- Condition Caps (2-way, 3-way and 4way) cover the gap that exists between panel conditions as 90 degree intersections

TO ORDER:

Select the product number and then add the codes for Trim Style, Color Selection and Fabric Option.

CAC Plan View

For example, to order a Classic XXI 32" 2-1/2" CTC Spacer, Upholstered (CICAC32), w/ PVC Plastic Trim Style (P), Black Plastic Color (B) and 8066 Pewter Interlude Fabric (8066), select:

configurations

Trim Style	
M	Metal (Metal Powder-Coat Finish)
Р	PVC Plastic

21/2" x 21/2" W

Color Selection (if product contains additional components with a color option, the selection will be matched)		
Plastic Trim Style	Metal Trim Style	
Black (B)	Black (27)	
Grey (G)	Gray (29)	
Light Tone (L)	Light Tone (32)	
	Cottonwood (35)	
Sand (S)	Sand (28)	
10/ 0 0.00	Warm Gray (33)	
Warm Grey (W)	Starlight Silver (B)	


	Fabri	c Option	
See OFG	Upholstery Ca	ard for offerinç	gs.

- · Product dimensions are given in approximate inches
- · Appearance of product may vary from descriptions
- When ordering Fabric Panels, the higher grade value will determine the price auote
- Power accessories and Vertical posts are sold separately

 Noise Reduction Coefficient is based
- on the test method ASTM C-423
- Review finish options on pg. 76, Or see OFG Finish and Upholstery Card



Trim • Conditions for Extended Raceways

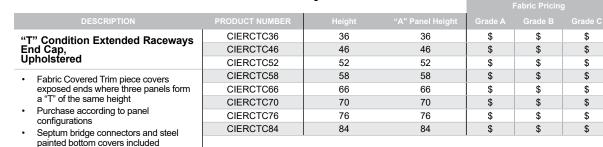


CLASSIC XXI

- Assemble and disassemble 'modules' with segmented and stackable panels assembled in any combination, allowing on-module and off-module accessories matching OFG System Finishes
- Accommodates all standard types of cables, easily customized and accessed in the steel frame with "U" channels for laid management
- Solid panel construction can support worksurfaces, shelves and overhead cabinets all 'on-module'
- Same Universal Trim as Intersection Conditions
- Panel End Caps made from extruded rigid PVC cover end-of-run cap panels
- In-Line Variable Height Panel End Caps cover vertical posts when in-line panels are of different heights
- Condition Caps (2-way, 3-way and 4way) cover the gap that exists between panel conditions as 90 degree intersections



"T" Condition Panel End Cap Presentation View



TO ORDER: Select the product number and then add the codes for Trim Style, Color Selection and Fabric Option.

For example, to order a Classic XXI 36" "T" Condition Extended Raceways Panel End Cap, Upholstered (CIERCPT36), w/ PVC Plastic Trim Style (P) Black Plastic Color (B), select:

Trim Style	
М	Metal (Metal Powder-Coat Finish)
P	PVC Plastic

(if product contains add	Selection ditional components with a lection will be matched)
Plastic Trim Style	Metal Trim Style
Black (B)	Black (27)
Grey (G)	Gray (29)
Light Tone (L)	Light Tone (32)
	Cottonwood (35)
Sand (S)	Sand (28)
	Warm Gray (33)
Warm Grey (W)	Starlight Silver (B)

	Fabric	Optio	on	
See OFG Up	holstery Car	d for offer	ings.	

NOTES

Color Selection

B 8066

Fabric Option


Product Number

CIERCTC36

- Product dimensions are given in approximate inches
- Appearance of product may vary from descriptions
- When ordering Fabric Panels, the higher grade value will determine the price quote
- Power accessories and Vertical posts are sold separately
- Noise Reduction Coefficient is based on the test method ASTM C-423
- Review finish options on pg. 76, Or see OFG Finish and Upholstery Card




Trim • Conditions for Extended Raceways

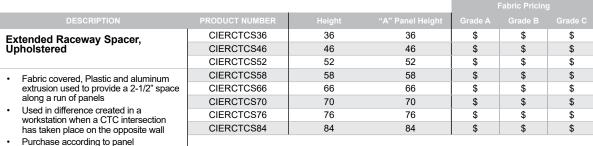


CLASSIC XXI

- Assemble and disassemble 'modules' with segmented and stackable panels assembled in any combination, allowing on-module and off-module accessories matching OFG System Finishes
- Accommodates all standard types of cables, easily customized and accessed in the steel frame with "U" channels for laid management
- Solid panel construction can support worksurfaces, shelves and overhead cabinets all 'on-module'
- Same Universal Trim as Intersection Conditions
- Panel End Caps made from extruded rigid PVC cover end-of-run cap panels
- In-Line Variable Height Panel End Caps cover vertical posts when in-line panels are of different heights
- Condition Caps (2-way, 3-way and 4way) cover the gap that exists between panel conditions as 90 degree intersections



CTC Spacer Presentation View



TO ORDER:Select the product number and then add the codes for Trim Style, Color Selection and Fabric Option.

For example, to order a Classic XXI 36" Extended Raceway 2-1/2" CTC Spacer, Upholstered (CIERCTCS36), w/ PVC Plastic Trim Style (P), Black Plastic Color (B) and 8066 Pewter Interlude Fabric (8066), select:

configurations

Septum bridge connectors and steel painted bottom covers included

Trim Style		
М	Metal (Metal Powder-Coat Finish)	
Р	PVC Plastic	

(if product contains add	Selection ditional components with lection will be matched)
Plastic Trim Style	Metal Trim Style
Black (B)	Black (27)
Grey (G)	Gray (29)
Light Tone (L)	Light Tone (32)
	Cottonwood (35)
Sand (S)	Sand (28)
Warm Grey (W)	Warm Gray (33)
	Starlight Silver (B)

	Fabric Option	
See OFG L	Jpholstery Card for offerings.	


Product Number	Color	Selection
CIERCTCS36	P	B 8066
	Trim Style	Fabric Option

NOTES

- Product dimensions are given in approximate inches
- Appearance of product may vary from descriptions
- When ordering Fabric Panels, the higher grade value will determine the price quote
- Power accessories and Vertical posts
 are sold separately.
- are sold separately
 Noise Reduction Coefficient is based on the test method ASTM C-423
- Review finish options on pg. 76, Or see OFG Finish and Upholstery Card




Trim • Conditions for Extended Raceways

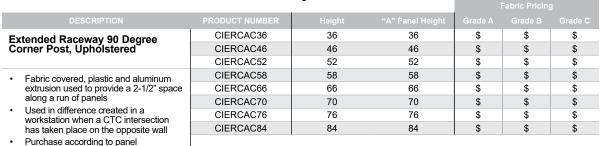


CLASSIC XXI

- Assemble and disassemble 'modules' with segmented and stackable panels assembled in any combination, allowing on-module and off-module accessories matching OFG System
- Accommodates all standard types of cables, easily customized and accessed in the steel frame with "U" channels for laid management
- Solid panel construction can support worksurfaces, shelves and overhead cabinets all 'on-module'
- Same Universal Trim as Intersection Conditions
- · Panel End Caps made from extruded rigid PVC cover end-of-run cap panels
- In-Line Variable Height Panel End Caps cover vertical posts when in-line panels are of different heights
- Condition Caps (2-way, 3-way and 4way) cover the gap that exists between panel conditions as 90 degree intersections



CIERCA

Presentation View



TO ORDER: Select the product number and then add the codes for Trim Style, Color Selection and Fabric Option.

For example, to order a Classic XXI 36" Extended Raceway 2-1/2" CTC Spacer, Upholstered (CIERCAC32), w/ PVC Plastic Trim Style (P), Black Plastic Color (B) and 8066 Pewter Interlude Fabric (8066), select:

configurations

Septum bridge connectors and steel painted bottom covers included

	Trim Style
М	Metal (Metal Powder-Coat Finish)
Р	PVC Plastic

(if product contains addi	election tional components with a ction will be matched)
Plastic Trim Style	Metal Trim Style
Black (B)	Black (27)
Grey (G)	Gray (29)
4)	Light Tone (32)
Light Tone (L)	Cottonwood (35)
Sand (S)	Sand (28)
M/	Warm Gray (33)
Warm Grey (W)	Starlight Silver (B)

	Fabri	ic Opti	ion	
See OFG I	Jpholstery C	ard for offe	erings.	

Product Number	Color	Selection
CIERCAC36	P	B 8066
	Trim Style	Fabric Option

- · Product dimensions are given in approximate inches
- · Appearance of product may vary from descriptions
- When ordering Fabric Panels, the higher grade value will determine the price auote
- Power accessories and Vertical posts are sold separately

 Noise Reduction Coefficient is based
- on the test method ASTM C-423
- Review finish options on pg. 76, Or see OFG Finish and Upholstery Card




Mounts • Accessories


See Planning Guidelines (pgs. 3-4) for

Purchase according to panel

configurations (i.e raceway style)

applications

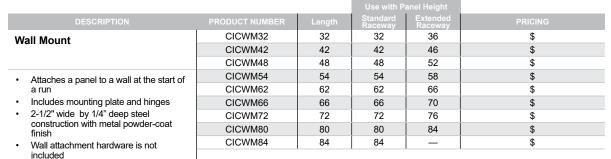



Wall Mount and Adjustable Wall Mount

Wall Mount Presentation View

DESCRIPTION	PRODUCT NUMBER		Standard Raceway	Extended Raceway	PRICING
Adjustable Wall Mount	CICWMA32	32	32	36	\$
rajastasis tran meant	CICWMA42	42	42	46	\$
	CICWMA48	48	48	52	\$
Attaches a panel to a wall at the start of	CICWMA54	54	54	58	\$
a run	CICWMA62	62	62	66	\$
 Includes mounting plate and hinges 	CICWMA66	66	66	70	\$
2-1/2" wide by 1" deep steel	CICWMA72	72	72	76	\$
construction with metal powder-coat finish	CICWMA80	80	80	84	\$
Wall attachment hardware is not	CICWMA84	84	84	_	\$
included					



Adjustable Wall Mount Presentation View

TO ORDER:

Select the product number and then add the codes for Trim Style and Color Selection.

For example, to order a Classic XXI 32" Wall Mount (CICWM32), w/ Metal Trim Style and Starlight Silver Metal Powder-Coat Finish (34), select:

Purchase according to panel configurations (i.e raceway style)

deflection

applications)

Adjustable up to 5/8" to correct wall

See Planning Guidelines (pgs. 3-4) for

	Trim Style
М	Metal (Metal Powder-Coat Finish)
Р	PVC Plastic

Product Number	Color Selection			
CICWM32	M 34 Trim Style			

CLASSIC XXI

- Assemble and disassemble 'modules' with segmented and stackable panels assembled in any combination, allowing on-module and off-module accessories matching OFG System Finishes
- Accommodates all standard types of cables, easily customized and accessed in the steel frame with "U" channels for laid management
- Solid panel construction can support worksurfaces, shelves and overhead cabinets all 'on-module'
- Same Universal Trim as Intersection Conditions
- Adjustable Wall Mount consists of a formed steel channel enclosed in a steel "U" channel to allow panels to be attached to existing building walls
- Method of attachment to the existing building depends on the existing wall construction

NOTES

- Product dimensions are given in approximate inches
- Appearance of product may vary from descriptions
- When ordering Fabric Panels, the higher grade value will determine the price quote
- Power accessories and Vertical posts are sold separately
- Noise Reduction Coefficient is based on the test method ASTM C-423
- Review finish options on pg. 76, Or see OFG Finish and Upholstery Card




Intersections • Other

			Use with Panel Height		
DESCRIPTION	PRODUCT NUMBER	HEIGHT	Standard Raceway	Extended Raceway	PRICING
Center Mount	CIPCM32	32	32	36	\$
	CIPCM42	42	42	46	\$
	CIPCM48	48	48	52	\$
Provides for the attachment of an acoustical, glass or open frame panel at a 90° angle along the face of another acoustical, glass or open frame panel to form a "T" configuration	CIPCM54	54	54	58	\$
	CIPCM66	66	66	70	\$
	CIPCM72	72	72	76	\$
	CIPCM80	80	80	84	\$



Panel Center Mount Presentation View



Panels must be the same height

Is not capable of passing power from panel-to-panel

Purchase according to panel configurations (i.e raceway style)

Available in black only

NOTES:

- Product dimensions are given in
- approximate inches

 Appearance of product may vary

CLASSIC XXI

Assemble and disassemble 'modules' with segmented and stackable panels assembled in any combination, allowing on-module and off-module accessories matching OFG System

Accommodates all standard types of cables, easily customized and accessed in the steel frame with "U" channels for laid management

Solid panel construction can support

worksurfaces, shelves and overhead

Same Universal Trim as Intersection

· Panel End Caps made from extruded rigid PVC cover end-of-run cap panels In-Line Variable Height Panel End Caps cover vertical posts when in-line

panels are of different heights Condition Caps (2-way, 3-way and 4way) cover the gap that exists between panel conditions as 90

degree intersections

cabinets all 'on-module'

Conditions

- from descriptions

 When ordering Fabric Panels, the higher grade value will determine the
- Power accessories and Vertical posts are sold separately
 Noise Reduction Coefficient is based on the test method ASTM C-423
- Review finish options on pg. 76, Or see OFG Finish and Upholstery Card



TO ORDER:

Select the product number for the desired items.

For example, to order a Classic XXI 32" Panel Center Mount (CIPCM32), select:

OVERVIEW • Stackable Trim & Caps



Stackable End-of-Run (CISPSEORS) Pg. 37



Stackable "T" Post (CISPSCTFCS) Pg. 38



90° Stackable Corner (CISPSCAFCS) Pg. 39




Stacking Variable End-of-Run (CISPSVEORS)




 Accommodates all standard types of cables, easily customized and accessed in the steel frame with "U" channels for laid management Solid panel construction can support worksurfaces, shelves and overhead cabinets all 'on-module'

CLASSIC XXI


· Assemble and disassemble 'modules' with segmented and stackable panels assembled in any combination, allowing on-module and off-module accessories matching OFG System




Stackable Variable "T" Corner (CISPSVCTFCS) Pg. 41



Stackable Variable 90° Corner (CISPSVCAFCS)



In-Line Variable Height End Pg. 43



Variable Height 90° Corner Post & End Cap (CIUECPC & CIFECPC)

Pgs. 44 & 45




Variable Height "T" Post & End Cap (CIUECPT & CIFECPT)

Pgs. 46 & 47



Two-Way Cap





Four-Way Cap (CIFWC)


Pg. 49

NOTES:

- Product dimensions are given in approximate inches
- · Appearance of product may vary
- from descriptions

 When ordering Fabric Panels, the higher grade value will determine the
- price quote
 Power accessories and Vertical posts
- Noise Reduction Coefficient is based on the test method ASTM C-423
- Review finish options on pg. 76, Or see OFG Finish and Upholstery Card






Includes a sleeve to align with end of

Only available in PVC Plastic

DESCRIPTION	PRODUCT NUMBER	"A" Tile Height	PRICING
Stackable End-of-Run,	CISPSEORS12	12	\$
Unupholstered	CISPSEORS14	14	\$
	CISPSEORS18	18	\$
 End Cap covers stackable section end Specify to match the height of the 	CISPSEORS24	24	\$
	CISPSEORS30	30	\$
stackable section (purchase separately)			

Stackable Panel End-of-Run Presentation View

Stackable End-of-Run In-place View



Stackable Panel End-of-Run

NOTES:

- · Product dimensions are given in
- approximate inchesAppearance of product may vary

CLASSIC XXI

Assemble and disassemble 'modules' with segmented and stackable panels assembled in any combination, allowing on-module and off-module accessories matching OFG System

 Accommodates all standard types of cables, easily customized and accessed in the steel frame with "U" channels for laid management

Solid panel construction can support worksurfaces, shelves and overhead

Same Universal Trim as Intersection

 Panel End Caps made from extruded rigid PVC cover end-of-run cap panels In-Line Variable Height Panel End Caps cover vertical posts when in-line panels are of different heights Condition Caps (2-way, 3-way and 4way) cover the gap that exists between panel conditions as 90

cabinets all 'on-module'

degree intersections

Conditions

- from descriptions

 When ordering Fabric Panels, the higher grade value will determine the price quote
- Power accessories and Vertical posts
- Noise Reduction Coefficient is based on the test method ASTM C-423
- Review finish options on pg. 76, Or see OFG Finish and Upholstery Card



TO ORDER:

Select the product number and then add the codes for Color Selection (PVC Plastic only).

For example, to order a Classic XXI 12" Stackable Trim End-of-Run, Upholstered (CISPSEORS12), w/ Black Plastic Color (B), select:

Specify to match the height of the


Includes a sleeve to align with end of

stackable section (purchase separately)


				Fabric Pricing	
DESCRIPTION	PRODUCT NUMBER	"A" Tile Height	Grade A	Grade B	
Stackable "T" Post (CTC).	CISPSCTFCS12	12	\$	\$	\$
Stackable "T" Post (CTC), Upholstered	CISPSCTFCS14	14	\$	\$	\$
	CISPSCTFCS18	18	\$	\$	\$
Fabric covered extruded plastic trim piece covers exposed stackable section	CISPSCTFCS24	24	\$	\$	\$
	CISPSCTFCS30	30	\$	\$	\$
ends where three sections form a "T" configuration					

CLASSIC XXI

- Assemble and disassemble 'modules' with segmented and stackable panels assembled in any combination, allowing on-module and off-module accessories matching OFG System
- Accommodates all standard types of cables, easily customized and accessed in the steel frame with "U" channels for laid management
- Solid panel construction can support worksurfaces, shelves and overhead cabinets all 'on-module'
- Same Universal Trim as Intersection Conditions
- Panel End Caps made from extruded rigid PVC cover end-of-run cap panels
- In-Line Variable Height Panel End Caps cover vertical posts when in-line panels are of different heights
- Condition Caps (2-way, 3-way and 4-way) cover the gap that exists between panel conditions as 90 degree intersections



Stackable Trim CTC Presentation View



TO ORDER: Select the product number and then add the codes for Trim Style, Color Selection and Fabric Option.

For example, to order a Classic XXI 12" Stackable Trim "T" Post (CTC) Trim, Upholstered (CISPSCTFCS12), w/ PVC Plastic Trim Style (P), Black Plastic Color (B) and 8066 Pewter Interlude Fabric (8066), select:

Trim Style			
M	Metal (Metal Powder-Coat Finish)		
Р	PVC Plastic		

Color Selection (if product contains additional components with a color option, the selection will be matched)				
Plastic Trim Style	Metal Trim Style			
Black (B)	Black (27)			
Grey (G)	Gray (29)			
Link Ton of (L)	Light Tone (32)			
Light Tone (L)	Cottonwood (35)			
Sand (S)	Sand (28)			
Marina Cray (AAA)	Warm Gray (33)			
Warm Grey (W)	Starlight Silver (B)			

	Fal	bric (Optio	on	
See OFG	Jpholster	y Card f	or offeri	ings.	

- · Product dimensions are given in approximate inches
- · Appearance of product may vary
- from descriptions

 When ordering Fabric Panels, the higher grade value will determine the price auote
- Power accessories and Vertical posts
- Noise Reduction Coefficient is based on the test method ASTM C-423
- Review finish options on pg. 76, Or see OFG Finish and Upholstery Card



Product Number

CISPSCTFCS12

Color Selection

B 8066

Fabric Option

degree configuration


run trim

ends where two sections form a 90

Specify to match the height of the

stackable section (purchase separately)


Includes a sleeve to align with end of



DESCRIPTION	PRODUCT NUMBER	"A" Tile Height	Grade A	Grade B	
Stackable 90 Degree Corner	CISPSCAFCS12	12	\$	\$	\$
Stackable 90 Degree Corner, Upholstered	CISPSCAFCS18	18	\$	\$	\$
	CISPSCAFCS24	24	\$	\$	\$
Fabric covered extruded plastic trim	CISPSCAFCS30	30	\$	\$	\$
nices severe expected stackable section					


CLASSIC XXI

- Assemble and disassemble 'modules' with segmented and stackable panels assembled in any combination, allowing on-module and off-module accessories matching OFG System
- · Accommodates all standard types of cables, easily customized and accessed in the steel frame with "U" channels for laid management
- Solid panel construction can support worksurfaces, shelves and overhead cabinets all 'on-module'
- Same Universal Trim as Intersection
- · Panel End Caps made from extruded rigid PVC cover end-of-run cap panels
- In-Line Variable Height Panel End Caps cover vertical posts when in-line panels are of different heights
- Condition Caps (2-way, 3-way and 4way) cover the gap that exists between panel conditions as 90 degree intersections



Stackable Trim CAC In-place View

Stackable Trim CAC Presentation View



TO ORDER: Select the product number and then add the codes for Trim Style, Color Selection and Fabric Option.

For example, to order a Classic XXI 12" Stackable Trim 90 Degree Corner (CAC) Trim, Upholstered (CISPSCAFCS12), w/ PVC Plastic Trim Style (P), Black Plastic Color (B) and 8066 Pewter Interlude Fabric (8066), select:

Trim Style			
М	Metal (Metal Powder-Coat Finish)		
Р	PVC Plastic		

Color Selection (if product contains additional components with a color option, the selection will be matched)				
Plastic Trim Style	Metal Trim Style			
Black (B)	Black (27)			
Grey (G)	Gray (29)			
Limbs Town (L)	Light Tone (32)			
Light Tone (L)	Cottonwood (35)			
Sand (S)	Sand (28)			
Marro Cres (AAA)	Warm Gray (33)			
Warm Grey (W)	Starlight Silver (B)			

	Fabr	іс Ор	tion	
See OFG (Jpholstery (Card for c	offerings.	

Color Selection

B 8066

Fabric Option

Product Number

CISPSCAFCS12

- · Product dimensions are given in approximate inches
- · Appearance of product may vary from descriptions
- When ordering Fabric Panels, the higher grade value will determine the price auote
- Power accessories and Vertical posts are sold separately


 Noise Reduction Coefficient is based
- on the test method ASTM C-423
- Review finish options on pg. 76, Or see OFG Finish and Upholstery Card



Specify to match the height of the


stackable section (purchase separately)

Includes a sleeve to align with end of

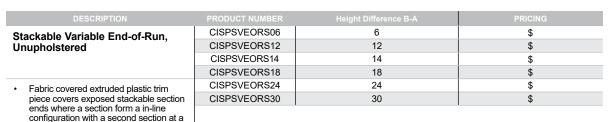


CLASSIC XXI

- Assemble and disassemble 'modules' with segmented and stackable panels assembled in any combination, allowing on-module and off-module accessories matching OFG System Finishes
- Accommodates all standard types of cables, easily customized and accessed in the steel frame with "U" channels for laid management
- Solid panel construction can support worksurfaces, shelves and overhead cabinets all 'on-module'
- Same Universal Trim as Intersection Conditions
- Panel End Caps made from extruded rigid PVC cover end-of-run cap panels
- In-Line Variable Height Panel End Caps cover vertical posts when in-line panels are of different heights
- Condition Caps (2-way, 3-way and 4way) cover the gap that exists between panel conditions as 90 degree intersections



Stackable Variable Trim VCAC Presentation View of a Panel Condition



Stackable Variable Trim VCAC Plan View of a Panel Condition

TO ORDER:Select the product number and then add the codes for Trim Style and Color Selection

For example, to order a Classic XXI 12" Stackable Trim Variable End-of-Run (VEOR) Trim, Unupholstered (CISPSVOERS12), w/ PVC Plastic Trim Style (P) and Black Plastic Color (B), select:

Trim Style			
M	Metal (Metal Powder-Coat Finish)		
Р	PVC Plastic		

(if product contains ad	Selection ditional components wi lection will be matched)
Plastic Trim Style	Metal Trim Style
Black (B)	Black (27)
Grey (G)	Gray (29)
Link Town (II)	Light Tone (32)
Light Tone (L)	Cottonwood (35)
Sand (S)	Sand (28)
Marra Cray (MA)	Warm Gray (33)
Warm Grey (W)	Starlight Silver (B)

Product Number Color Selection

CISPSVEORS12 P B

Tim Style

NOTES

- Product dimensions are given in approximate inches
- Appearance of product may vary from descriptions
- When ordering Fabric Panels, the higher grade value will determine the price quote
- Power accessories and Vertical posts
 are sold separately.
- are sold separately
 Noise Reduction Coefficient is based on the test method ASTM C-423
- Review finish options on pg. 76, Or see OFG Finish and Upholstery Card






- Fabric covered extruded plastic trim piece covers exposed stackable section ends where two sections form a "T" configuration and a third (or third and fourth) panel(s) is at a lower height
- Specify to match the height of the stackable section (purchase separately)
- Includes a sleeve to align with end of

		abilic Pilciliç	
PRODUCT NUMBER	Height Difference B-A	Grade B	Grade C
CISPSVCTFCS06	6	\$ \$	\$
CISPSVCTFCS12	12	\$ \$	\$
CISPSVCTFCS14	14	\$ \$	\$
CISPSVCTFCS18	18	\$ \$	\$
CISPSVCTFCS24	24	\$ \$	\$
CISPSVCTFCS30	30	\$ \$	\$


CLASSIC XXI


- Assemble and disassemble 'modules' with segmented and stackable panels assembled in any combination, allowing on-module and off-module accessories matching OFG System
- Accommodates all standard types of cables, easily customized and accessed in the steel frame with "U" channels for laid management
- Solid panel construction can support worksurfaces, shelves and overhead cabinets all 'on-module'
- Same Universal Trim as Intersection Conditions
- Panel End Caps made from extruded rigid PVC cover end-of-run cap panels
- In-Line Variable Height Panel End Caps cover vertical posts when in-line panels are of different heights
- Condition Caps (2-way, 3-way and 4way) cover the gap that exists between panel conditions as 90 degree intersections



Stackable Variable Trim VCAC Presentation View of a Panel Condition

Stackable Variable Trim VCAC





TO ORDER: Select the product number and then add the codes for Trim Style, Color Selection and Fabric Option.

For example, to order a Classic XXI 12" Stackable Trim Variable "T" Post (VCTF) Trim, Upholstered (CISPSVCTFCS12), w/ PVC Plastic Trim Style (P), Black Plastic Color (B) and 8066 Pewter Interlude Fabric (8066), select:

Trim Style			
M Metal (Metal Powder-Coat Finish)			
Р	PVC Plastic		

Color Selection (if product contains additional components with a color option, the selection will be matched)				
Plastic Trim Style	Metal Trim Style			
Black (B)	Black (27)			
Grey (G)	Gray (29)			
Liebt Ton a (L)	Light Tone (32)			
Light Tone (L)	Cottonwood (35)			
Sand (S)	Sand (28)			
Marro Cros (AAA	Warm Gray (33)			
Warm Grey (W)	Starlight Silver (B)			

Fabric Option
See OFG Upholstery Card for offerings.

Color Selection

P B 8066

Fabric Option

Product Number

CISPSVCTFCS12

- · Product dimensions are given in approximate inches
- · Appearance of product may vary from descriptions
- When ordering Fabric Panels, the higher grade value will determine the price auote
- Power accessories and Vertical posts are sold separately

 Noise Reduction Coefficient is based
- on the test method ASTM C-423
- Review finish options on pg. 76, Or see OFG Finish and Upholstery Card



configuration and a third (or third and

stackable section (purchase separately)

Includes a sleeve to align with end of


fourth) panel(s) is at a lower height

Specify to match the height of the


DESCRIPTION	PRODUCT NUMBER	Height Difference B-A	PRICING
Stackable Variable 90 Degree	CISPSVCAFCS06	6	\$
Corner,	CISPSVCAFCS12	12	\$
Unupholstered	CISPSVCAFCS14	14	\$
	CISPSVCAFCS18	18	\$
Fabric covered extruded plastic trim	CISPSVCAFCS24	24	\$
piece covers exposed stackable section	CISPSVCAFCS30	30	\$
ands where two sections form a 00°			

CLASSIC XXI

- · Assemble and disassemble 'modules' with segmented and stackable panels assembled in any combination, allowing on-module and off-module accessories matching OFG System
- Accommodates all standard types of cables, easily customized and accessed in the steel frame with "U" channels for laid management
- Solid panel construction can support worksurfaces, shelves and overhead cabinets all 'on-module'
- Same Universal Trim as Intersection Conditions
- Panel End Caps made from extruded rigid PVC cover end-of-run cap panels
- In-Line Variable Height Panel End Caps cover vertical posts when in-line panels are of different heights
- Condition Caps (2-way, 3-way and 4way) cover the gap that exists between panel conditions as 90 degree intersections



Stackable Variable Trim VCAC In-place View of a Three Panel Condition




TO ORDER:

Select the product number and then add the codes for Trim Style and Color Selection

For example, to order a Classic XXI 12" Stackable Trim Variable 90 Degree Corner (CAC) Trim, Unupholstered (CISPSVCAFCS12), w/ PVC Plastic Trim Style (P) and Black Plastic Color (B), select:

Trim Style				
М	Metal (Metal Powder-Coat Finish)			
Р	PVC Plastic			

Color Selection (if product contains additional components with a color option, the selection will be matched)				
Plastic Trim Style	Metal Trim Style			
Black (B)	Black (27)			
Grey (G)	Gray (29)			
Light Tone (L)	Light Tone (32)			
	Cottonwood (35)			
Sand (S)	Sand (28)			
Warm Grey (W)	Warm Gray (33)			
	Starlight Silver (B)			



- · Product dimensions are given in approximate inches
- · Appearance of product may vary
- from descriptions

 When ordering Fabric Panels, the higher grade value will determine the price auote
- Power accessories and Vertical posts
- Noise Reduction Coefficient is based on the test method ASTM C-423
- Review finish options on pg. 76, Or see OFG Finish and Upholstery Card



In-Line Two Panels Different Heights Assembled View
In-Line Two Panels Different Heights Assembled View

Includes 2-1/2" deep exposed panel end when in-line panels are of different heights and includes transition cap to top cap

In-Line Variable Height End Cap

•	Purchase according to panel
	configurations (i.e. if Standard Raceway
	and Extended Raceways are used in
	conjunction, the frame size is the panel
	height used)

	PRODUCT NUMBER	Height	"A" Panel Height	"B" Panel Height	PRICING
	CIECPL3242	Special 10	32	42	\$
	CIECPL3248	Special 16	32	48	\$
	CIECPL3254	Special 22	32	54	\$
nd	CIECPL3262	Special 30	32	62	\$
	CIECPL3266	Special 34	32	66	\$
	CIECPL3272	Special 40	32	72	\$
	CIECPL3280	Special 48	32	80	\$
y	CIECPL4248	6	42	48	\$
ı	CIECPL4254	12	42	54	\$
	CIECPL4262	20	42	62	\$
	CIECPL4266	24	42	66	\$
	CIECPL4272	30	42	72	\$
	CIECPL4280	38	42	80	\$
	CIECPL4854	6	48	54	\$
	CIECPL4862	14	48	62	\$
	CIECPL4866	18	48	66	\$
	CIECPL4872	24	48	72	\$
	CIECPL4880	32	48	80	\$
	CIECPL5462	8	54	62	\$
	CIECPL5466	12	54	66	\$
	CIECPL5472	18	54	72	\$
	CIECPL5480	26	54	80	\$
	CIECPL6266	4	62	66	\$
	CIECPL6272	10	62	72	\$
	CIECPL6280	18	62	80	\$
	CIECPL6672	6	66	72	\$
	CIECPL6680	14	66	80	\$
	CIECPL7280	8	72	80	\$

CLASSIC XXI

- Assemble and disassemble 'modules' with segmented and stackable panels assembled in any combination, allowing on-module and off-module accessories matching OFG System
- Accommodates all standard types of cables, easily customized and accessed in the steel frame with "U" channels for laid management
- Solid panel construction can support worksurfaces, shelves and overhead cabinets all 'on-module'
- Same Universal Trim as Intersection Conditions
- Panel End Caps made from extruded rigid PVC cover end-of-run cap panels
- In-Line Variable Height Panel End Caps cover vertical posts when in-line panels are of different heights
- Condition Caps (2-way, 3-way and 4way) cover the gap that exists between panel conditions as 90 degree intersections





In-Line Two Panels Different Heights

TO ORDER: Product Number Color Selection Select the product number and then add the codes for trim style and metal powder-coat finish. CIECPL3242 РВ For example, to order a Classic XXI Special 10" In-Line Variable Height Panel End Cap (CIECPL3242), w/ PVC Plastic Trim Style (P) and Black Plastic Color (B), select: Trim Style

Trim Style		
М	Metal (Metal Powder-Coat Finish)	
Р	PVC Plastic	


	ditional components with lection will be matched)
Plastic Trim Style	Metal Trim Style
Black (B)	Black (27)
Grey (G)	Gray (29)
Liebt Tone (L)	Light Tone (32)
Light Tone (L)	Cottonwood (35)
Sand (S)	Sand (28)
Marina Cuar (AAA)	Warm Gray (33)
Warm Grey (W)	Starlight Silver (B)

Color Selection

- · Product dimensions are given in approximate inches
- · Appearance of product may vary
- from descriptions

 When ordering Fabric Panels, the higher grade value will determine the price quote
 • Power accessories and Vertical posts
- Noise Reduction Coefficient is based on the test method ASTM C-423
- Review finish options on pg. 76, Or see OFG Finish and Upholstery Card



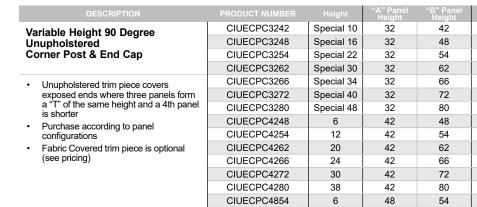

CIUECPC4862

CIUECPC4866

CIUECPC4872

CIUECPC4880

CIUECPC5462

CIUECPC5466

CIUECPC5472

CIUECPC5480

CIUECPC6266

CIUECPC6272

CIUECPC6280 CIUECPC6672

CIUECPC6680

CIUECPC7280

14

18

24

32

8

12

18

26

4

10

18

6

14

8

48

48

48

48

54

54

54

54

62

62

62

66

66

72

62

66

72

80

62

66

72

80

66

72

80

72

80

80

CLASSIC XXI

Assemble and disassemble 'modules' with segmented and stackable panels assembled in any combination, allowing on-module and off-module accessories matching OFG System

\$

\$

\$

\$

\$

\$

\$

\$

\$

\$

\$

\$

\$

\$

\$

\$

\$

\$

\$

\$

\$

\$

\$


\$

\$


\$

\$

- Accommodates all standard types of cables, easily customized and accessed in the steel frame with "U" channels for laid management
- Solid panel construction can support worksurfaces, shelves and overhead cabinets all 'on-module'
- Same Universal Trim as Intersection Conditions
- Panel End Caps made from extruded rigid PVC cover end-of-run cap panels
- In-Line Variable Height Panel End Caps cover vertical posts when in-line panels are of different heights
- Condition Caps (2-way, 3-way and 4way) cover the gap that exists between panel conditions as 90 degree intersections



Variable Height CAC Presentation View



Variable Height CAC

TO ORDER: Select the product number and then add the codes for Trim Style, Color Selection and Fabric Option.

For example, to order a Classic XXI Special 10" Variable Height Unupholstered CAC Panel End Cap (CIUECPC3242), w/ PVC Plastic Trim Style (P) and Black Plastic Color (B), select:

Trim Style		
M	Metal (Metal Powder-Coat Finish)	
Р	PVC Plastic	

(if product contains additional components with a color option, the selection will be matched)		
Plastic Trim Style	Metal Trim Style	
Black (B)	Black (27)	
Grey (G)	Gray (29)	
Link Ton (II)	Light Tone (32)	
Light Tone (L)	Cottonwood (35)	
Sand (S)	Sand (28)	
Marina Cray (MA)	Warm Gray (33)	
Warm Grey (W)	Starlight Silver (B)	

Product Number Color Selection CIUECPC3242 РВ Trim Style

- · Product dimensions are given in approximate inches
- · Appearance of product may vary from descriptions
- When ordering Fabric Panels, the higher grade value will determine the price auote
- Power accessories and Vertical posts are sold separately
- · Noise Reduction Coefficient is based on the test method ASTM C-423
- Review finish options on pg. 76, Or see OFG Finish and Upholstery Card






•	Trim piece covers exposed ends where three panels form a "T" of the same height and a 4th panel is shorter
•	Purchase according to panel configurations

Fabric Covered trim piece is optional
(see pricing)


					Fabric	
PRODUCT NUMBER		"A" Panel Height	"B" Panel Height	Grade A	Grade B	
CIFECPC3242	Special 10	32	42	\$	\$	\$
CIFECPC3248	Special 16	32	48	\$	\$	\$
CIFECPC3254	Special 22	32	54	\$	\$	\$
CIFECPC3262	Special 30	32	62	\$	\$	\$
CIFECPC3266	Special 34	32	66	\$	\$	\$
CIFECPC3272	Special 40	32	72	\$	\$	\$
CIFECPC3280	Special 48	32	80	\$	\$	\$
CIFECPC4248	6	42	48	\$	\$	\$
CIFECPC4254	12	42	54	\$	\$	\$
CIFECPC4262	20	42	62	\$	\$	\$
CIFECPC4266	24	42	66	\$	\$	\$
CIFECPC4272	30	42	72	\$	\$	\$
CIFECPC4280	38	42	80	\$	\$	\$
CIFECPC4854	6	48	54	\$	\$	\$
CIFECPC4862	14	48	62	\$	\$	\$
CIFECPC4866	18	48	66	\$	\$	\$
CIFECPC4872	24	48	72	\$	\$	\$
CIFECPC4880	32	48	80	\$	\$	\$
CIFECPC5462	8	54	62	\$	\$	\$
CIFECPC5466	12	54	66	\$	\$	\$
CIFECPC5472	18	54	72	\$	\$	\$
CIFECPC5480	26	54	80	\$	\$	\$
CIFECPC6266	4	62	66	\$	\$	\$
CIFECPC6272	10	62	72	\$	\$	\$
CIFECPC6280	18	62	80	\$	\$	\$
CIFECPC6672	6	66	72	\$	\$	\$
CIFECPC6680	14	66	80	\$	\$	\$
CIFECPC7280	8	72	80	\$	\$	\$

CLASSIC XXI

- Assemble and disassemble 'modules' with segmented and stackable panels assembled in any combination, allowing on-module and off-module accessories matching OFG System
- Accommodates all standard types of cables, easily customized and accessed in the steel frame with "U" channels for laid management
- Solid panel construction can support worksurfaces, shelves and overhead cabinets all 'on-module'
- Same Universal Trim as Intersection Conditions
- Panel End Caps made from extruded rigid PVC cover end-of-run cap panels
- In-Line Variable Height Panel End Caps cover vertical posts when in-line panels are of different heights
- Condition Caps (2-way, 3-way and 4-way) cover the gap that exists between panel conditions as 90 degree intersections



Variable Height CAC Presentation View



TO ORDER: Select the product number and then add the codes for Trim Style, Color Selection and Fabric Option.

For example, to order a Classic XXI Special 10" Variable Height CAC Panel End Cap (CIFECPC3242), w/ PVC Plastic Trim Style (P), Black Plastic Color (B) and 8066 Pewter Interlude Fabric (8066), select:

Trim Style		
М	Metal (Metal Powder-Coat Finish)	
Р	PVC Plastic	

Color Selection (if product contains additional components with color option, the selection will be matched)		
Plastic Trim Style	Metal Trim Style	
Black (B)	Black (27)	
Grey (G)	Gray (29)	
LinkTon (I)	Light Tone (32)	
Light Tone (L)	Cottonwood (35)	
Sand (S)	Sand (28)	
Marina Cray (AAA)	Warm Gray (33)	
Warm Grey (W)	Starlight Silver (B)	

	Fabric Option
d))	See OFG Upholstery Card for offerings.


Product Number	Color Sel	ection 8066
CIFECPC3242		
	Trim Style	 Fabric Option

- · Product dimensions are given in
- approximate inches

 Appearance of product may vary
- from descriptions

 When ordering Fabric Panels, the higher grade value will determine the price quote
 • Power accessories and Vertical posts
- are sold separately
 Noise Reduction Coefficient is based on the test method ASTM C-423
- Review finish options on pg. 76, Or see OFG Finish and Upholstery Card








Variable Height Unupholstered

	10 01 101 101
•	Purchase according to panel configurations (i.e. if Standard Raceway and Extended Raceways are used in conjunction, the frame size is the panel height used)

	PRODUCT NUMBER	Height	"A" Panel Height	"B" Panel Height	PRICING
	CIUECPT3242	Special 10	32	42	\$
	CIUECPT3248	Special 16	32	48	\$
	CIUECPT3254	Special 22	32	54	\$
	CIUECPT3262	Special 30	32	62	\$
١.	CIUECPT3266	Special 34	32	66	\$
el	CIUECPT3272	Special 40	32	72	\$
	CIUECPT3280	Special 48	32	80	\$
y	CIUECPT4248	6	42	48	\$
	CIUECPT4254	12	42	54	\$
	CIUECPT4262	20	42	62	\$
	CIUECPT4266	24	42	66	\$
	CIUECPT4272	30	42	72	\$
	CIUECPT4280	38	42	80	\$
	CIUECPT4854	6	48	54	\$
	CIUECPT4862	14	48	62	\$
	CIUECPT4866	18	48	66	\$
	CIUECPT4872	24	48	72	\$
	CIUECPT4880	32	48	80	\$
	CIUECPT5462	8	54	62	\$
	CIUECPT5466	12	54	66	\$
	CIUECPT5472	18	54	72	\$
	CIUECPT5480	26	54	80	\$
	CIUECPT6266	4	62	66	\$
	CIUECPT6272	10	62	72	\$
	CIUECPT6280	18	62	80	\$
	CIUECPT6672	6	66	72	\$
	CIUECPT6680	14	66	80	\$
	CIUECPT7280	8	72	80	\$

CLASSIC XXI

- Assemble and disassemble 'modules' with segmented and stackable panels assembled in any combination, allowing on-module and off-module accessories matching OFG System
- Accommodates all standard types of cables, easily customized and accessed in the steel frame with "U" channels for laid management
- Solid panel construction can support worksurfaces, shelves and overhead cabinets all 'on-module'
- Same Universal Trim as Intersection Conditions
- Panel End Caps made from extruded rigid PVC cover end-of-run cap panels
- In-Line Variable Height Panel End Caps cover vertical posts when in-line panels are of different heights
- Condition Caps (2-way, 3-way and 4-way) cover the gap that exists between panel conditions as 90 degree intersections



Variable Height Unupholstered CTC

Assembled View

TO ORDER:	
Select the product number and then add the codes for Trim Style	, Color Selection and Fabric Option.

For example, to order a Classic XXI Special 10" Variable Height Unupholstered CTC Panel End Cap (CIUECPT3242), w/ PVC Plastic Trim Style (P), and Black Plastic Color (B), select:

	Trim Style
М	Metal (Metal Powder-Coat Finish)
P	PVC Plastic

(if product contains ad	Selection ditional components with a lection will be matched)
Plastic Trim Style	Metal Trim Style
Black (B)	Black (27)
Grey (G)	Gray (29)
Link Ton (II)	Light Tone (32)
Light Tone (L)	Cottonwood (35)
Sand (S)	Sand (28)
Marra Cray (AAA)	Warm Gray (33)
Warm Grey (W)	Starlight Silver (B)

Product Number	Color Selection
CIUECPT3242	P B Trim Style

- · Product dimensions are given in approximate inches
- · Appearance of product may vary
- from descriptions

 When ordering Fabric Panels, the higher grade value will determine the price auote
- Power accessories and Vertical posts
- Noise Reduction Coefficient is based on the test method ASTM C-423
- Review finish options on pg. 76, Or see OFG Finish and Upholstery Card






(see pricing)

	ricignit and a 4th pariet is shorter
•	Purchase according to panel
	configurations (i.e. if Standard Raceway
	and Extended Raceways are used in
	conjunction, the frame size is the panel
	height used)
	Fabric Covered trim piece is optional


	PRODUCT NUMBER		"A" Panel Height	"B" Panel Height	Grade A	Grade B	
	CIFECPT3242	Special 10	32	42	\$	\$	\$
ĺ	CIFECPT3248	Special 16	32	48	\$	\$	\$
	CIFECPT3254	Special 22	32	54	\$	\$	\$
	CIFECPT3262	Special 30	32	62	\$	\$	\$
	CIFECPT3266	Special 34	32	66	\$	\$	\$
	CIFECPT3272	Special 40	32	72	\$	\$	\$
,	CIFECPT3280	Special 48	32	80	\$	\$	\$
	CIFECPT4248	6	42	48	\$	\$	\$
	CIFECPT4254	12	42	54	\$	\$	\$
	CIFECPT4262	20	42	62	\$	\$	\$
	CIFECPT4266	24	42	66	\$	\$	\$
	CIFECPT4272	30	42	72	\$	\$	\$
	CIFECPT4280	38	42	80	\$	\$	\$
	CIFECPT4854	6	48	54	\$	\$	\$
	CIFECPT4862	14	48	62	\$	\$	\$
	CIFECPT4866	18	48	66	\$	\$	\$
	CIFECPT4872	24	48	72	\$	\$	\$
	CIFECPT4880	32	48	80	\$	\$	\$
	CIFECPT5462	8	54	62	\$	\$	\$
	CIFECPT5466	12	54	66	\$	\$	\$
	CIFECPT5472	18	54	72	\$	\$	\$
	CIFECPT5480	26	54	80	\$	\$	\$
	CIFECPT6266	4	62	66	\$	\$	\$
	CIFECPT6272	10	62	72	\$	\$	\$
	CIFECPT6280	18	62	80	\$	\$	\$
	CIFECPT6672	6	66	72	\$	\$	\$
	CIFECPT6680	14	66	80	\$	\$	\$
	CIFECPT7280	8	72	80	\$	\$	\$

CLASSIC XXI

- Assemble and disassemble 'modules' with segmented and stackable panels assembled in any combination, allowing on-module and off-module accessories matching OFG System
- Accommodates all standard types of cables, easily customized and accessed in the steel frame with "U" channels for laid management
- Solid panel construction can support worksurfaces, shelves and overhead cabinets all 'on-module'
- Same Universal Trim as Intersection Conditions
- Panel End Caps made from extruded rigid PVC cover end-of-run cap panels
- In-Line Variable Height Panel End Caps cover vertical posts when in-line panels are of different heights
- Condition Caps (2-way, 3-way and 4-way) cover the gap that exists between panel conditions as 90 degree intersections



Variable Height CTC Presentation View



TO ORDER: Select the product number and then add the codes for Trim Style, Color Selection and Fabric Option.

For example, to order a Classic XXI Special 10" Variable Height CTC Panel End Cap (CIFECPT3242), w/ PVC Plastic Trim Style (P), Black Plastic Color (B) and 8066 Pewter Interlude Fabric (8066), select:

	Trim Style
М	Metal (Metal Powder-Coat Finish)
Р	PVC Plastic


(if product contains add	Selection ditional components with a ection will be matched)
Plastic Trim Style	Metal Trim Style
Black (B)	Black (27)
Grey (G)	Gray (29)
Liebt Tone (L)	Light Tone (32)
Light Tone (L)	Cottonwood (35)
Sand (S)	Sand (28)
Mam Croy AAA	Warm Gray (33)
Warm Grey (W)	Starlight Silver (B)

Product Number	Color Sele	ection
CIFECPT3242	P B Trim Style	8066 Fabric Option

- · Product dimensions are given in approximate inches
- · Appearance of product may vary
- from descriptions


 When ordering Fabric Panels, the higher grade value will determine the price quote
 • Power accessories and Vertical posts
- Noise Reduction Coefficient is based on the test method ASTM C-423
- Review finish options on pg. 76, Or see OFG Finish and Upholstery Card



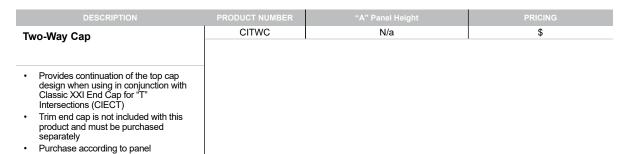

CLASSIC XXI


- Assemble and disassemble 'modules' with segmented and stackable panels assembled in any combination, allowing on-module and off-module accessories matching OFG System
- Accommodates all standard types of cables, easily customized and accessed in the steel frame with "U" channels for laid management
- Solid panel construction can support worksurfaces, shelves and overhead cabinets all 'on-module'
- Same Universal Trim as Intersection Conditions



TWC

configurations

Presentation View



TO ORDER with Plastic Trim Style: Select the product number and then add the codes for Color Selection. For example, to order a Classic XXI Two Way Cap (FWC) (CITWC), w/ Black Plastic Color (B), select:	Product Number CITWC B Cobr Selection
TO ORDER with Metal Trim Style: Select the product number and then add the codes for Metal Trim Style and Color Selection. For example, to order a Classic XXI Two Way Cap (FWC) (CITWC), w/ PVC Metal Trim Style (M) and Starlight Silver Metal Powder-Coat Finish (34), select:	Product Number Finish CITWC M 34 Tim Style


NOTES:

- Product dimensions are given in approximate inches
 Appearance of product may vary
- from descriptions


 When ordering Fabric Panels, the higher grade value will determine the
- Power accessories and Vertical posts are sold separately
 Noise Reduction Coefficient is based on the test method ASTM C-423
- Review finish options on pg. 76, Or see OFG Finish and Upholstery Card



Trim • 4-Way Conditions




DESCRIPTION	PRODUCT NUMBER	"A" Panel Height	PRICING
Four-Way Top Cap	CIFWC	N/a	\$
Provides continuation of the top cap design "X" Intersections (four panels of the same height meeting at 90 degree angle) Purchase according to panel configurations			



FWC In-Place View

FWC

Presentation View



TO ORDER with Plastic Trim Style:

- · Product dimensions are given in approximate inches
- · Appearance of product may vary from descriptions

CLASSIC XXI

Assemble and disassemble 'modules' with segmented and stackable panels assembled in any combination, allowing on-module and off-module accessories matching OFG System

 Accommodates all standard types of cables, easily customized and accessed in the steel frame with "U" channels for laid management

Solid panel construction can support worksurfaces, shelves and overhead

Same Universal Trim as Intersection

· Panel End Caps made from extruded rigid PVC cover end-of-run cap panels In-Line Variable Height Panel End Caps cover vertical posts when in-line panels are of different heights Condition Caps (2-way, 3-way and 4way) cover the gap that exists between panel conditions as 90


cabinets all 'on-module'

degree intersections

Conditions

- When ordering Fabric Panels, the higher grade value will determine the price quote
- Power accessories and Vertical posts are sold separately


 Noise Reduction Coefficient is based
- on the test method ASTM C-423
- Review finish options on pg. 76, Or see OFG Finish and Upholstery Card

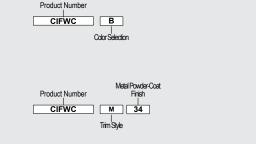







Components • Overview









Power Top Feed (CITxTFPL & CITxTFP216) Pg. 51




Metal Trim & Power Top Feed (CITxTFMxx& CITxTFMxx216)




Pan Retrofit Kit (CITxEPRxx) Pg. 53




Power Pass Through Pg. 53 (UETxxxEPTxx)



Panel Power Connector, Short (UETxPJ17) Pg. 54



Panel Power Connector, Long (UETxPJ20) Pg. 54



Receptacle Pg. 54

CLASSIC XXI

- Assemble and disassemble 'modules' with segmented and stackable panels assembled in any combination, allowing on-module and off-module accessories matching OFG System
- Accommodates all standard types of cables, easily customized and accessed in the steel frame with "U" channels for laid management
- Solid panel construction can support worksurfaces, shelves and overhead cabinets all 'on-module'
- 10-wire system is available in two configurations (6-2-2 and 4-4-2)
- UL label is green for 6-2-2 and blue for 4-4-2 applications
- Classic XXI 10-wire electrical is able to integrate with existing Bravo and Classic System Panels
- Rated at 120 vAC @ 20 amps
- · All receptacles rated at 15 amps
- Different receptacles for each system, and different connectors specific to each system
- Plastic colored "convenience" circuits (1, 2, & 3) have a hot wire with shared over-sized neutral wire & building ground wire
- "Isolated ground" circuits colored orange (4, 5 & 6) have separate hot wires, shared over-sized neutral wire & share an isolated ground wire

NOTES:

- · Product dimensions are given in approximate inches
- · Appearance of product may vary from descriptions
- When ordering Fabric Panels, the higher grade value will determine the price auote
- Power accessories and Vertical posts
- Noise Reduction Coefficient is based on the test method ASTM C-423
- Review finish options on pg. 76, Or see OFG Finish and Upholstery Card





Base Product (CIT_BF72NH)

DESCRIPTION	PRODUCT NUMBER	SYSTEM TYPE	PRICING
Jniversal Base Power Feed	CIT4BF72NH	4-4-2	\$
Sinversal Base I owel I eea	CIT6BF72NH	6-2-2	\$
Selectable finish			

TO ORDER:

Select the product number and then add the codes for desidered Color Selection.

For example, to order a Classic XXI 4-4-2 Universal Base Feed for Base-Raceway (CIT4BF72NH), w/ Black Plastic Color (B), select;

Product Number CIT4BF72NH B Color Selection



Plastic Trim Power Top Feed (CIT_TF_PL)

DESCRIPTION	PRODUCT NUMBER	System Type	Ceiling Pole Length	Power Feed Length	PRICING
Power Top Feed	CIT4TF7PL	4-4-2	7 ft.	12 ft.	\$
	CIT4TF10PL	4-4-2	10 ft.	19 ft.	\$
	CIT6TF7PL	6-2-2	7 ft.	12 ft.	\$
Includes electrical infeed, extruded	CIT6TF10P216	6-2-2	10 ft.	19 ft.	\$
aluminum ceiling pole (finished) and panel & ceiling trim					

TO ORDER:

Select the product number and then add the codes for desidered Color Selection.

For example, to order a Classic XXI 7' 4-4-2 Power Top Feed Plastic (CIT4TF7PL), w/ Black Plastic Color (B), select:

Product Number CIT4TF7PL B Color Selection

CLASSIC XXI

- Assemble and disassemble 'modules' with segmented and stackable panels assembled in any combination, allowing on-module and off-module accessories matching OFG System
- Accommodates all standard types of cables, easily customized and accessed in the steel frame with "U" channels for laid management
- Solid panel construction can support worksurfaces, shelves and overhead cabinets all 'on-module'
- · 10-wire system is available in two configurations (6-2-2 and 4-4-2)
- · UL label is green for 6-2-2 and blue for 4-4-2 applications
- Classic XXI 10-wire electrical is able to integrate with existing Bravo and Classic System Panels
- Rated at 120 vAC @ 20 amps
- All receptacles rated at 15 amps
- Different receptacles for each system, and different connectors specific to each system
- Plastic colored "convenience" circuits (1, 2, & 3) have a hot wire with shared over-sized neutral wire & building ground wire
- "Isolated ground" circuits colored orange (4, 5 & 6) have separate hot wires, shared over-sized neutral wire & share an isolated ground wire

NOTES:

- · Product dimensions are given in approximate inches
- · Appearance of product may vary from descriptions
- When ordering Fabric Panels, the higher grade value will determine the price auote
- Power accessories and Vertical posts are sold separately

 Noise Reduction Coefficient is based
- on the test method ASTM C-423
- Review finish options on pg. 76, Or see OFG Finish and Upholstery Card





DESCRIPTION	PRODUCT NUMBER		Ceiling Pole Length	Power Feed Length	Panel Top Length	PRICING
letal Trim & Power Top Feed	CIT4TF7M24	4-4-2	7 ft.	12 ft.	24	\$
	CIT4TF7M30	4-4-2	7 ft.	12 ft.	30	\$
	CIT4TF7M36	4-4-2	7 ft.	12 ft.	36	\$
Includes electrical infeed, extruded	CIT4TF7M42	4-4-2	7 ft.	12 ft.	42	\$
aluminum ceiling pole (finished) and	CIT4TF7M48	4-4-2	7 ft.	12 ft.	48	\$
panel & ceiling trim	CIT4TF7M24216	4-4-2	7 ft.	19 ft.	24	\$
Panel Trim is metal and purchase accordingly to panel width	CIT4TF7M30216	4-4-2	7 ft.	19 ft.	30	\$
	CIT4TF7M36216	4-4-2	7 ft.	19 ft.	36	\$
	CIT4TF7M42216	4-4-2	7 ft.	19 ft.	42	\$
	CIT4TF7M48216	4-4-2	7 ft.	19 ft.	48	\$
	CIT4TF10M24	4-4-2	10 ft.	19 ft.	24	\$
	CIT4TF10M30	4-4-2	10 ft.	19 ft.	30	\$
	CIT4TF10M36	4-4-2	10 ft.	19 ft.	36	\$
	CIT4TF10M42	4-4-2	10 ft.	19 ft.	42	\$
	CIT4TF10M48	4-4-2	10 ft.	19 ft.	48	\$
	CIT6TF7M24	6-2-2	7 ft.	12 ft.	24	\$
	CIT6TF7M30	6-2-2	7 ft.	12 ft.	30	\$
	CIT6TF7M36	6-2-2	7 ft.	12 ft.	36	\$
	CIT6TF7M42	6-2-2	7 ft.	12 ft.	42	\$
	CIT6TF7M48	6-2-2	7 ft.	12 ft.	48	\$
	CIT6TF7M24216	6-2-2	7 ft.	19 ft.	24	\$
	CIT6TF7M30216	6-2-2	7 ft.	19 ft.	30	\$
	CIT6TF7M36216	6-2-2	7 ft.	19 ft.	36	\$
	CIT6TF7M42216	6-2-2	7 ft.	19 ft.	42	\$
	CIT6TF7M48216	6-2-2	7 ft.	19 ft.	48	\$
	CIT6TF10M24	6-2-2	10 ft.	19 ft.	24	\$
	CIT6TF10M30	6-2-2	10 ft.	19 ft.	30	\$
	CIT6TF10M36	6-2-2	10 ft.	19 ft.	36	\$
	CIT6TF10M42	6-2-2	10 ft.	19 ft.	42	\$

6-2-2

10 ft.

19 ft.

48

CIT6TF10M48

CLASSIC XXI

- Assemble and disassemble 'modules' with segmented and stackable panels assembled in any combination, allowing on-module and off-module accessories matching OFG System
- Accommodates all standard types of cables, easily customized and accessed in the steel frame with "U" channels for laid management
- Solid panel construction can support worksurfaces, shelves and overhead cabinets all 'on-module'
- 10-wire system is available in two configurations (6-2-2 and 4-4-2)
- UL label is green for 6-2-2 and blue for 4-4-2 applications
- Classic XXI 10-wire electrical is able to integrate with existing Bravo and Classic System Panels
- Rated at 120 vAC @ 20 amps
- All receptacles rated at 15 amps
- Different receptacles for each system, and different connectors specific to each system
- Plastic colored "convenience" circuits (1, 2, & 3) have a hot wire with shared over-sized neutral wire & building ground wire
- "Isolated ground" circuits colored orange (4, 5 & 6) have separate hot wires, shared over-sized neutral wire & share an isolated ground wire

NOTES:

- · Product dimensions are given in approximate inches
- · Appearance of product may vary
- from descriptions

 When ordering Fabric Panels, the higher grade value will determine the price quote
 • Power accessories and Vertical posts
- Noise Reduction Coefficient is based on the test method ASTM C-423
- Review finish options on pg. 76, Or see OFG Finish and Upholstery Card


TO ORDER:

Select the product number and then add the codes for desired Color Selection.


For example, to order a Classic XXI 7' 4-4-2 Metal Trim & Power Top Feed (CIT4TF7M24), w/ Black Metal Trim (B), select:

Product Number CIT4TF7M24 B Color Selection





DESCRIPTION	PRODUCT NUMBER	SYSTEM TYPE	Panel Width	PRICING
Pan Retrofit Kit	CIT4EPR24	4-4-2	24	\$
an rodon rat	CIT4EPR30	4-4-2	30	\$
	CIT4EPR36	4-4-2	36	\$
Distributes 10-wire power and allows	CIT4EPR42	4-4-2	42	\$
mounting of receptacles	CIT4EPR48	4-4-2	48	\$
Includes two mounting bars, two	CIT4EPR54	4-4-2	54	\$
powered raceway covers with bezels and attachment screws	CIT4EPR60	4-4-2	60	\$
Provides power to non-powered panel	CIT6EPR24	6-2-2	24	\$
raceways (see widths available)	CIT6EPR30	6-2-2	30	\$
Purchase accordingly to panel width	CIT6EPR36	6-2-2	36	\$
Panel jumpers, receptacles and bezel	CIT6EPR42	6-2-2	42	\$
fillers (see Crescendo OFG Pricelist) must be ordered separately	CIT6EPR48	6-2-2	48	\$
macros stasted soparately	CIT6EPR54	6-2-2	54	\$
	CIT6EPR60	6-2-2	60	\$



DESCRIPTION	PRODUCT NUMBER	SYSTEM TYPE	Raceway Width	PRICING
Power Pass Through	UET442EPT12	4-4-2	12	\$
	UET442EPT18	4-4-2	18	\$
	UET442EPT24	4-4-2	24	\$
Provides continuation of power in a non-	UET442EPT30	4-4-2	30	\$
powered panel when powered panels	UET442EPT36	4-4-2	36	\$
are on either side	UET442EPT42	4-4-2	42	\$
Consists of flexible conduit with ten conductors and a connector on each	UET442EPT48	4-4-2	48	\$
end	UET442EPT54	4-4-2	54	\$
 Does not include receptacle access 	UET442EPT60	4-4-2	60	\$
	UET622EPT12	6-2-2	12	\$
	UET622EPT18	6-2-2	18	\$
	UET622EPT24	6-2-2	24	\$
	UET622EPT30	6-2-2	30	\$
	UET622EPT36	6-2-2	36	\$
	UET622EPT42	6-2-2	42	\$
	UET622EPT48	6-2-2	48	\$
	UET622EPT54	6-2-2	54	\$
	UET622EPT60	6-2-2	60	\$

TO ORDER ITEMS ON THIS PAGE:

Select the product number.

For example, to order a Classic XXI 4-4-2 24" Pan Retrofit Kit (4EPR24), select:

Product Number CIT4EPR24

CLASSIC XXI

- Assemble and disassemble 'modules' with segmented and stackable panels assembled in any combination, allowing on-module and off-module accessories matching OFG System
- Accommodates all standard types of cables, easily customized and accessed in the steel frame with "U" channels for laid management
- Solid panel construction can support worksurfaces, shelves and overhead cabinets all 'on-module'
- 10-wire system is available in two configurations (6-2-2 and 4-4-2)
- UL label is green for 6-2-2 and blue for 4-4-2 applications
- Classic XXI 10-wire electrical is able to integrate with existing Bravo and Classic System Panels
- · Rated at 120 vAC @ 20 amps
- · All receptacles rated at 15 amps
- Different receptacles for each system, and different connectors specific to each system
- Plastic colored "convenience" circuits (1, 2, & 3) have a hot wire with shared over-sized neutral wire & building ground wire
- "Isolated ground" circuits colored orange (4, 5 & 6) have separate hot wires, shared over-sized neutral wire & share an isolated ground wire

NOTES:

- · Product dimensions are given in approximate inches
- · Appearance of product may vary from descriptions
- When ordering Fabric Panels, the higher grade value will determine the price auote
- Power accessories and Vertical posts are sold separately

 Noise Reduction Coefficient is based
- on the test method ASTM C-423
- Review finish options on pg. 76, Or see OFG Finish and Upholstery Card





Base Product (UET_PJ17)

DESCRIPTION	PRODUCT NUMBER	SYSTEM TYPE	LENGTH	PRICING
Panel Power Connector, Short	UET4PJ17	4-4-2	17	\$
Horizonal Jumper	UET6PJ17	6-2-2	17	\$

Jumps power in-line and inside 90 degree "L" corner intersections

Base Product (UET_PI20)

DESCRIPTION	PRODUCT NUMBER	SYSTEM TYPE	LENGTH	PRICING
Panel Power Connector, Long Horizonal Jumper	UET4PJ20	4-4-2	20	\$
	UET6PJ20	6-2-2	20	\$
Jumps power outside 90 degree corners and straight thru "T"				

TO ORDER PANEL POWER CONNECTORS:

Select the product number.

For example, to order a Classic XXI Panel Power Connector, Long Horizonal Jumper 6-2-2 (UET6PJ20), select:

intersections

Product Number



Base Product (CIT_RC_) Assembled View

DESCRIPTION	PRODUCT NUMBER	SYSTEM TYPE	COLOR OPTION	PRICING
Receptacle	CIT4RC1	4-4-2	Yes	\$
Recoptació	CIT4RC2	4-4-2	Yes	\$
	CIT4RC3I	4-4-2	n/a	\$
Includes receptable, bezel and one filler	CIT4RC4I	4-4-2	n/a	\$
plate	CIT6RC1	6-2-2	Yes	\$
 Snaps to wireways for base-raceways 	CIT6RC2	6-2-2	Yes	\$
and powered panels	CIT6RC3	6-2-2	Yes	\$
Rated 15 amps @ 120 volts Filler plate can be removed to accept	CIT6RC4I	6-2-2	n/a	\$
 Filler plate can be removed to accept Modular Data Plates (sold separately) 	CIT6RC5I	6-2-2	n/a	\$
May be used at any access height	CIT6RC6I	6-2-2	n/a	\$

TO ORDER RECEPTACLES:

Select the product number and then add the codes for Color Selection (if applicable).

For example, to order a Classic XXI 4-4-2 First Circuit Receptacle (CIT4RC1) w/ Black Plastic Color (B), select:

Product Number

CIT4RC1

B

Color Selection

CLASSIC XXI


- Assemble and disassemble 'modules' with segmented and stackable panels assembled in any combination, allowing on-module and off-module accessories matching OFG System Finishes
- Accommodates all standard types of cables, easily customized and accessed in the steel frame with "U" channels for laid management
- Solid panel construction can support worksurfaces, shelves and overhead cabinets all 'on-module'
- 10-wire system is available in two configurations (6-2-2 and 4-4-2)
- UL label is green for 6-2-2 and blue for 4-4-2 applications
- Classic XXI 10-wire electrical is able to integrate with existing Bravo and Classic System Panels
- · Rated at 120 vAC @ 20 amps
- · All receptacles rated at 15 amps
- Different receptacles for each system, and different connectors specific to each system
- Plastic colored "convenience" circuits (1, 2, & 3) have a hot wire with shared over-sized neutral wire & building ground wire
- "Isolated ground" circuits colored orange (4, 5 & 6) have separate hot wires, shared over-sized neutral wire & share an isolated ground wire


NOTES:


- Product dimensions are given in approximate inches
- Appearance of product may vary from descriptions
- When ordering Fabric Panels, the higher grade value will determine the price quote
- Power accessories and Vertical posts are sold separately
- Noise Reduction Coefficient is based on the test method ASTM C-423
- Review finish options on pg. 76, Or see OFG Finish and Upholstery Card





Worksurfaces • Overview



























Assemble and disassemble 'modules' with segmented and stackable panels assembled in any combination, allowing on-module and off-module accessories matching OFG System

CLASSIC XXI

- Accommodates all standard types of cables, easily customized and accessed in the steel frame with "U" channels for laid management
- Solid panel construction can support worksurfaces, shelves and overhead cabinets all 'on-module'
- Worksurfaces consist of 1-1/4" particleboard with high-pressure
- Laminate worksurface cores are encased in a .028" phenolic backer and a .030" face sheet of high-pressure laminate
- · Corner surfaces are pre-drilled for keyboards
- The 60" wide surfaces havehave an integrated steel reinforcement to allow adequate support for load bearing
- Worksurfaces 60" and wider include additional left-hand cantilever bracket
- All worksurfaces have a integral top bracket to prevent dislodgement

NOTES:

- Product dimensions are given in approximate inches
- · Appearance of product may vary
- from descriptions

 When ordering Fabric Panels, the higher grade value will determine the price auote
- Power accessories and Vertical posts are sold separately
 Noise Reduction Coefficient is based on the test method ASTM C-423
- Review finish options on pg. 76, Or see OFG Finish and Upholstery Card





20" x 30" Rectangular Worksurface (Base Product: CIWR2030)



DESCRIPTION	PRODUCT NUMBER		WIDTH	PRICING
Rectangular Worksurface	CIWR2024	20	24	\$
tootangalar Worksanase	CIWR2030	20	30	\$
	CIWR2036	20	36	\$
Includes on-module cantilever brackets	CIWR2042	20	42	\$
(60" & wider will included an additional	CIWR2048	20	48	\$
left-hand cantilever bracket and an	CIWR2054	20	54	\$
integrated steel reinforcement for load	CIWR2060	20	60	\$
bearing)	CIWR2066	20	66	\$
Selectable 2mm PVC textured edge	CIWR2072	20	72	\$
finish	CIWR2418	24	18	\$
Cantilever brackets are offered in	CIWR2424	24	24	\$
coordinating finish match	CIWR2430	24	30	\$
One grommet included with	CIWR2436	24	36	\$
worksurfaces up to 54" wide (in the center) and two with 60" & wider (one-	CIWR2442	24	42	\$
guater of the width from the left and	CIWR2448	24	48	\$
right)	CIWR2454	24	54	\$
	CIWR2460	24	60	\$
	CIWR2466	24	66	\$
	CIWR2472	24	72	\$
	CIWR2478	24	78	\$
	CIWR2484	24	84	\$
	CIWR2490	24	90	\$
	CIWR3024	30	24	\$
	CIWR3030	30	30	\$
	CIWR3036	30	36	\$
	CIWR3042	30	42	\$
	CIWR3048	30	48	\$
	CIWR3054	30	54	\$
	CIWR3060	30	60	\$
	CIWR3066	30	66	\$
	CIWR3072	30	72	\$
	CIWR3078	30	78	\$
	CIWR3084	30	84	\$
	CIWR3090	30	90	\$

30

96

\$

CLASSIC XXI

- Assemble and disassemble 'modules' with segmented and stackable panels assembled in any combination, allowing on-module and off-module accessories matching OFG System
- Accommodates all standard types of cables, easily customized and accessed in the steel frame with "U" channels for laid management
- Solid panel construction can support worksurfaces, shelves and overhead cabinets all 'on-module'
- Worksurfaces should be bought accordingly to matching worksurface width to the panel width when using on-module cantilevers
- Worksurfaces consist of 1-1/4" particleboard with high-pressure laminate
- Laminate worksurface cores are encased in a .028" phenolic backer and a .030" face sheet of high pressure laminate
- Worksurfaces 60" and wider will include additional left-hand cantilever bracket for support
- · All worksurfaces have an integral top bracket to prevent dislodgement
- Predrilled for suspended pedestals (see OPUS OFG Pricelist)

NOTES:


- · Product dimensions are given in approximate inches
- · Appearance of product may vary
- from descriptions

 When ordering Fabric Panels, the higher grade value will determine the price auote
- Power accessories and Vertical posts
- Noise Reduction Coefficient is based on the test method ASTM C-423
- Review finish options on pg. 76, Or see OFG Finish and Upholstery Card



CIWR3096





24" x 36" x 24" Curvlinear 90 Degree Corner Worksurface (Base Product: CIWC243624)

DESCRIPTION	PRODUCT NUMBER	Left Depth	Back Edge Length	Right Depth	"K" Length	PRICING
Curvlinear 90 Degree Corner	CIWC243624	24	36	24	17	\$
Worksurface	CIWC244224	24	42	24	25-1/2	\$
	CIWC244230	24	42	30	34	\$
Includes cantilevers	CIWC244824	24	48	24	21-1/2	\$
Worksurface has one Slimline grommet	CIWC244830	24	48	30	30	\$
located 12" from rear corner along right	CIWC304224	30	42	24	21-1/2	\$
read edge Predrilled to accept adjustable keyboard arm	CIWC304230	30	42	30	17	\$
	CIWC304824	30	48	24	30	\$
	CIWC304830	30	48	30	25-1/2	\$



Base Product (CIWD) w/ "M" Edge Banding and Slimline

DESCRIPTION	PRODUCT NUMBER	Left Depth		Right Width	"K" Length	PRICING
Diagonal 90 Degree Corner	CIWD243624	24	36	24	17	\$
Worksurface	CIWD244224	24	42	24	25-1/2	\$
	CIWD244230	24	42	30	21-1/2	\$
Includes cantilevers	CIWD244824	24	48	24	34	\$
A left-hand cantilever bracket is provided	CIWD244830	24	48	30	30	\$
for the back corner	CIWD304224	30	42	24	21-1/2	\$
Purchase accordingly, matching width to	CIWD304230	30	42	30	17	\$
Panel Width Worksurfaces has one Slimline grommet located 12" from rear corner along right read edge	CIWD304824	30	48	24	30	\$
	CIWD304830	30	48	30	25-1/2	\$


CLASSIC XXI

- Assemble and disassemble 'modules' with segmented and stackable panels assembled in any combination, allowing on-module and off-module accessories matching OFG System
- Accommodates all standard types of cables, easily customized and accessed in the steel frame with "U" channels for laid management
- Solid panel construction can support worksurfaces, shelves and overhead cabinets all 'on-module'
- Worksurfaces should be bought accordingly to matching worksurface width to the panel width when using on-module cantilevers
- Worksurfaces consist of 1-1/4" particleboard with high-pressure laminate
- Laminate worksurface cores are encased in a .028" phenolic backer and a .030" face sheet of highpressure laminate
- · Corner surfaces are pre-drilled for keyboards
- Worksurfaces 60" and wider include additional left-hand cantilever bracket for support
- All worksurfaces have an integral top bracket to prevent dislodgement

NOTES:

- · Product dimensions are given in approximate inches
- · Appearance of product may vary
- from descriptions


 When ordering Fabric Panels, the higher grade value will determine the price auote
- Power accessories and Vertical posts
- Noise Reduction Coefficient is based on the test method ASTM C-423
- Review finish options on pg. 76, Or see OFG Finish and Upholstery Card





Select the product number and then add the codes for Laminate Option and Color Selection (Plastic).

For example, to order a Classic XXI 20" x 36" x 24" Curvlinear 90 Degree Corner Worksurface (CIWC243624), Biltmore Cherry Laminate (4031) and Black Plastic Color (B), select:



24" x 48" x 60" Left Direction "P" Shaped Peninsula Worksurface (Base Product CIWPT244860R)

- CIWPT244860L Left 24 48 60 \$ "P" Shaped Peninsula CIWPT244860R Right 24 48 60 Worksurface CIWPT244872L 72 24 48 \$ Left 72 CIWPT244872R Right 24 48 Includes cantilevers (72" Long has integrated reinforcing bars) with 3" CIWPT304872L Left 30 48 72 \$ diameter metal column with height CIWPT304872R Right 30 48 72 adjustment glide
- 2mm PVC edge banding
- One Slimline Grommet included at the center on the rear edge
- · Facing direction is selectable


2mm PVC edge banding

center on the read edge

Facing direction is selectable

One Slimline Grommet included at the

DESCRIPTION	PRODUCT NUMBER	DIRECTION	DEPTH	WIDTH	LENGTH	PRICING
Piano Shaped Peninsula Worksurface	CIWPP244860L	Left	24	48	60	\$
	CIWPP244860R	Right	24	48	60	\$
	CIWPP244872L	Left	24	48	72	\$
Includes cantilevers (72" Long has integrated reinforcing bars) with 3" diameter metal column with height adjustment glide	CIWPP244872R	Right	24	48	72	\$
	CIWPP304872L	Left	30	48	72	\$
	CIWPP304872R	Right	30	48	72	\$
aujusii ilelii yilue						



24" x 48" x60" Left Direction Piano Peninsula Worksurface Base Product (CIWPP244860L)



24" x 48" x 60" Left Direction Square Shoe Worksurface Base Product (CIWSS244860L)

DESCRIPTION	PRODUCT NUMBER	DIRECTION	DEPTH	WIDTH	LENGTH	PRICING
Square Shoe Worksurface	CIWSS244860L	Left	24	48	60	\$
oquare once Worksurface	CIWSS244860R	Right	24	48	60	\$
	CIWSS244866L	Left	24	48	66	\$
Includes cantilevers (60" & longer have	CIWSS244866R	Right	24	48	66	\$
integrated reinforcing bars)	CIWSS244872L	Left	24	48	72	\$
Extra left-hand cantilever bracket	CIWSS244872R	Right	24	48	72	\$
provided with 66" & longer	CIWSS244884L	Left	24	48	84	\$
 Two Slimline Grommets (centered on side and rear edge) 	CIWSS244884R	Right	24	48	84	\$
Facing direction is selectable (see	CIWSS304866L	Left	30	48	66	\$
options)	CIWSS304866R	Right	30	48	66	\$
Purchase accordingly, matching width and length to panels in a 90 degree condition	CIWSS304872L	Left	30	48	72	\$
	CIWSS304872R	Right	30	48	72	\$
CONTINUENT	CIWSS304884L	Left	30	48	84	\$
	CIWSS304884R	Right	30	48	84	\$

TO ORDER:

Select the product number and then add the codes for Laminate Option and Color Selection.

For example, to order a Classic XXI 24" x 30" Left Direction "P" Peninsula Worksurface (CIWPT244860L) w/ Biltmore Cherry Laminate (4031) and Black Plastic Color (B), select:

Product Number Color Selection

CIWPT244860L 4031 B

Laminale Cotion

CLASSIC XXI

- Assemble and disassemble 'modules' with segmented and stackable panels assembled in any combination, allowing on-module and off-module accessories matching OFG System Finishes
- Accommodates all standard types of cables, easily customized and accessed in the steel frame with "U" channels for laid management
- Solid panel construction can support worksurfaces, shelves and overhead cabinets all 'on-module'
- Worksurfaces should be bought accordingly to matching worksurface width to the panel width when using on-module cantilevers
- Worksurfaces consist of 1-1/4" particleboard with high-pressure laminate
- Laminate worksurface cores are encased in a .028" phenolic backer and a .030" face sheet of highpressure laminate
- Worksurfaces 60" and wider will include additional left-hand cantilever bracket for support
- All worksurfaces have an integral top bracket to prevent dislodgement

NOTES:

- Product dimensions are given in approximate inches
- Appearance of product may vary from descriptions
- When ordering Fabric Panels, the higher grade value will determine the price quote
- Power accessories and Vertical posts are sold separately
- Noise Reduction Coefficient is based on the test method ASTM C-423
- Review finish options on pg. 76, Or see OFG Finish and Upholstery Card



adjustments for leveling

cantilevers

Connects two worksurfaces with a round end, allowing a space for the panel & end cap (mounting hardware is


Worksurface Depth (A) must be the same on both sides of the Panel

For example, to order a Classic XXI 30" x 48" "D" Shaped Peninsula Worksurface (CIWP3048), w/ Biltmore Cherry Laminate (4031) and Black Plastic



Base Product (CIWP)

DESCRIPTION	PRODUCT NUMBER	DEPTH	WIDTH	PRICING
"D" Shaped Peninsula Worksurfaces	CIWP3048	30	48	\$
	CIWP3054	30	54	\$
	CIWP3060	30	60	\$
Includes cantilevers for on-module mounting between 29-30" high (72" has	CIWP3072	30	72	\$
	CIWP3660	36	60	\$
two integrated reinforcing bars)	CIWP3672	36	72	\$
 Includes 3" diameter metal columns with glides which provides height 			'	



DESCRIPTION	PRODUCT NUMBER	"A" DEPTH	DEPTH	WIDTH	PRICING
Worksurface Mounted Conference End	CIWCE2551	24	25	51	\$
	CIWCE3151	24	31	51	\$
	CIWCE3163	30	31	63	\$
Includes two 3" diameter metal columns	CIWCE3763	30	37	63	\$
with adjustable glides for leveling and					

Base Product (CIWMSCPW) w/ Caster Option (C)

DESCRIPTION	PRODUCT NUMBER	"A" DEPTH		WIDTH	HEIGHT	PRICING
Mobile Semi-Circle Worksurface	CIWMSCP51	24	25	51-1/2	29-31"	\$
	CIWMSCP63	30	31	62-1/2	29-31"	\$
 Includes three 3" diameter metal columns with adjustable glides for leveling 						
 Includes 3" Casters (two of which are locking), field installed, the height of the worksurface is 29" (see options below) 						
 Nests next to two worksurfaces, allowing a space for the panel & end cap (mounting hardware is included) 						
 Worksurface Depth (A) must be the same on both sides of the Panel 						

CLASSIC XXI

- Assemble and disassemble 'modules' with segmented and stackable panels assembled in any combination, allowing on-module and off-module accessories matching OFG System
- Accommodates all standard types of cables, easily customized and accessed in the steel frame with "U" channels for laid management
- Solid panel construction can support worksurfaces, shelves and overhead cabinets all 'on-module'
- Worksurfaces consist of 1-1/4" particleboard with high-pressure
- Laminate worksurface cores are encased in a .028" phenolic backer and a .030" face sheet of highpressure laminate
- · All worksurfaces have an integral top bracket to prevent dislodgement

NOTES:

- · Product dimensions are given in approximate inches
- · Appearance of product may vary from descriptions
- When ordering Fabric Panels, the higher grade value will determine the price auote
- Power accessories and Vertical posts are sold separately

 Noise Reduction Coefficient is based
- on the test method ASTM C-423
- Review finish options on pg. 76, Or see OFG Finish and Upholstery Card



59

Product Number

CIWP3048 4031 B

Laminate Option


Color Selection


Select the product number and then add the codes for Laminate Option and Color Selection.

TO ORDER:

Color (B), select:

At 16" deep, countertops will also accommodate a task light





Base Product (CIWCT)

Assembled View

DESCRIPTION	PRODUCT NUMBER	WIDTH	PRICING
Straight Countertops	CIWCT243L	24	\$
Straight Countertops	CIWCT303L	30	\$
	CIWCT363L	36	\$
Can be mounted on top of panels of the	CIWCT423L	42	\$
same height (in-line) at 42" or higher	CIWCT483L	48	\$
 Includes two steel brackets and locking 	CIWCT543L	54	\$
clips to prevent dislodgement	CIWCT603L	60	\$
 Mounts on the inside of the workstation allowing for a 4" extension over the top 	CIWCT663L	66	\$
of the panel to conform with ADA	CIWCT723L	72	\$
auidelines		,	

Base Product (CIWCT) Presentation View

DESCRIPTION	PRODUCT NUMBER	WIDTH	PRICING
90 Degree Corner Countertops	CIW90243L	24	\$
	CIW90303L	30	\$
	CIW90363L	36	\$
Can be mounted on top of two panels with a 90 degree corner condition of the same height at 24", 30" or 36" high			
 Includes two steel brackets and locking clips to prevent dislodgement 			
Mounts on the inside of the workstation allowing for a 4" extension over the top of the panel to conform with ADA guidelines			
At 16" deep, countertops will also accommodate a task light			

TO ORDER:

Select the product number and then add the codes for Laminate Option and Color Selection.

For example, to order a Classic XXI 24" Straight Countertop (CIWCT243L), w/ Biltmore Cherry Laminate (4031) and Black Plastic Color (B), select:

Product Number Color Selection CIWCT243L 4031 B Laminate Option

CLASSIC XXI


- Assemble and disassemble 'modules' with segmented and stackable panels assembled in any combination, allowing on-module and off-module accessories matching OFG System
- Accommodates all standard types of cables, easily customized and accessed in the steel frame with "U" channels for laid management
- Solid panel construction can support worksurfaces, shelves and overhead cabinets all 'on-module'
- Worksurfaces should be bought accordingly to matching worksurface width to the panel width when using on-module cantilevers
- Worksurfaces consist of 1-1/4" particleboard with high-pressure laminate
- Laminate worksurface cores are encased in a .028" phenolic backer and a .030" face sheet of highpressure laminate
- All worksurfaces have an integral top bracket to prevent dislodgement

NOTES:

- · Product dimensions are given in
- approximate inchesAppearance of product may vary
- from descriptions

 When ordering Fabric Panels, the higher grade value will determine the price auote
- Power accessories and Vertical posts
- Noise Reduction Coefficient is based on the test method ASTM C-423
- Review finish options on pg. 76, Or see OFG Finish and Upholstery Card





Base Products (CIWCT & CIWCT90)



Straight Countertops for 32" High Panels

- Can be mounted on top of panels of the same height (in-line) at 32"
- Includes two steel brackets for mounting at 32" and locking clips to prevent dislodgement specially designed to not interfere with worksurfaces underneath
- Mounts on the inside of the workstation allowing for a 4" extension over the top of the penal to conform with ADA quidelines
- At 16" deep, countertops will also accommodate a task light
- · Features 2mm PVC Edge Banding

WIDTH	PRICING
24	\$
30	\$
36	\$
42	\$
48	\$
54	\$
60	\$
66	\$
72	\$
	30 36 42 48 54 60 66

Base Product (CIWCT) Presentation View

90 Degree Corner Countertops for 32" High Panels

- Can be mounted on top of two panels with a 90 degree corner condition of the same height at 32" high
- Includes two steel brackets for mounting at 32" and locking clips to prevent dislodgement specially designed to not interfere with worksurfaces underneath
- Mounts on the inside of the workstation allowing for a 4" extension over the top of the panel to conform with ADA guidelines
- At 16" deep, countertops will also accommodate a task light
- If countertop is installed adjacent to an in-line height change full post, a notch must be specified on the left, right or both sides of the worksurface
- · Features 2mm PVC Edge Banding


PRODUCT NUMBER	WIDTH	PRICING
CIWCTWC90243L	24	\$
CIWCTWC90303L	30	\$
CIWCTWC90363L	36	\$

CLASSIC XXI

- Assemble and disassemble 'modules' with segmented and stackable panels assembled in any combination, allowing on-module and off-module accessories matching OFG System Finishes
- Accommodates all standard types of cables, easily customized and accessed in the steel frame with "U" channels for laid management
- Solid panel construction can support worksurfaces, shelves and overhead cabinets all 'on-module'
- Worksurfaces should be bought accordingly to matching worksurface width to the panel width when using on-module cantilevers
- Worksurfaces consist of 1-1/4" particleboard with high-pressure laminate
- Laminate worksurface cores are encased in a .028" phenolic backer and a .030" face sheet of highpressure laminate
- All worksurfaces have an integral top bracket to prevent dislodgement

NOTES:

- Product dimensions are given in approximate inches
- Appearance of product may vary from descriptions
- When ordering Fabric Panels, the higher grade value will determine the price quote
- Power accessories and Vertical posts are sold separately
- Noise Reduction Coefficient is based on the test method ASTM C-423
- Review finish options on pg. 76, Or see OFG Finish and Upholstery Card



TO ORDER:


Select the product number and then add the codes for Laminate Option and Color Selection.

For example, to order a Classic XXI 24" Straight Countertop for 32" High Panels (CIWCTWC243L), w/ Biltmore Cherry Laminate (4031) and Black Plastic Color (B), select:


OFFICE FURNITURE GROUP

Worksurface Accessories • Overview


Pg. 63




Panel Mounted Supports (SPSL or SPSLI)





Worksurface Support Panel (CIWSSPL) Pg. 64



Worksurface Support Bracket (CIWSBx)







Pg. 66

CLASSIC XXI

- Assemble and disassemble 'modules' with segmented and stackable panels assembled in any combination, allowing on-module and off-module accessories matching OFG System
- Accommodates all standard types of cables, easily customized and accessed in the steel frame with "U" channels for laid management
- Solid panel construction can support worksurfaces, shelves and overhead cabinets all 'on-module'
- · All worksurface accessories are sold as complete kits for installation

NOTES:

- Product dimensions are given in approximate inches
 Appearance of product may vary from descriptions
 When ordering Fabric Panels, the higher grade value will determine the
- Power accessories and Vertical posts are sold separately
 Noise Reduction Coefficient is based on the test method ASTM C-423
- Review finish options on pg. 76, Or see OFG Finish and Upholstery Card





Base Product (PSL) Left Surface Direction Shown

DESCRIPTION	PRODUCT NUMBER	FACING	DEPTH	HEIGHT	PRICING
Panel Mounted Worksurface Support, Open Leg	SPSL1829L	Left	18	29	\$
	SPSL1829R	Right	18	29	\$
	SPSL2429L	Left	24	29	\$
Provides additional support for worksurface of the same depth	SPSL2429R	Right	24	29	\$
	SPSL3029L	Left	30	29	\$
 Includes mounting hardware and leveling glide 	SPSL3029R	Right	30	29	\$

Base Product (PSLI) Left Surface Direction Shown

DESCRIPTION	PRODUCT NUMBER	FACING	DEPTH	HEIGHT	PRICING
Panel Mounted Worksurface Support, Insert Leg	SPSLI1829L	Left	18	29	\$
	SPSLI1829R	Right	18	29	\$
	SPSLI2429L	Left	24	29	\$
Includes mounting hardware, leveling glide and bracket frame insert	SPSLI2429R	Right	24	29	\$
	SPSLI3029L	Left	30	29	\$
 Provides additional support for 	SPSLI3029R	Right	30	29	\$
worksurface of the same depth					

CLASSIC XXI

- Assemble and disassemble 'modules' with segmented and stackable panels assembled in any combination, allowing on-module and off-module accessories matching OFG System
- Accommodates all standard types of cables, easily customized and accessed in the steel frame with "U" channels for laid management
- Solid panel construction can support worksurfaces, shelves and overhead cabinets all 'on-module'
- Included adjustable glides allow the worksurface to remain level within the advised height range

NOTES:

- · Product dimensions are given in
- approximate inchesAppearance of product may vary
- from descriptions

 When ordering Fabric Panels, the higher grade value will determine the price quote
 • Power accessories and Vertical posts
- Noise Reduction Coefficient is based on the test method ASTM C-423
- Review finish options on pg. 76, Or see OFG Finish and Upholstery Card



TO ORDER:

Select the product number and then add the codes for Color Selection.


For example, to order a Classic XXI 18" Left Depth Panel Mounted Worksurface, Open Leg Support (SPSL1829L), w/ Black Plastic Color (B), select:

Product Number SPSL1829L B Color Selection

63

CLASSIC XXI • Systems • Spec Guide

2026 v1.04

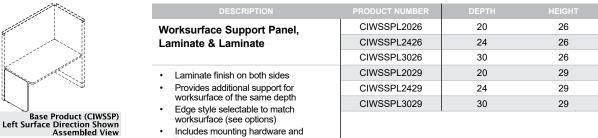


Includes mounting hardware and

leveling glide

DESCRIPTION	PRODUCT NUMBER	DEPTH	HEIGHT	PRICING
Worksurface Support Panel,	CIWSSPL2026	20	26	\$
Laminate & Laminate	CIWSSPL2426	24	26	\$
	CIWSSPL3026	30	26	\$
Laminate finish on both sides	CIWSSPL2029	20	29	\$
 Provides additional support for 	CIWSSPL2429	24	29	\$
worksurface of the same depthEdge style selectable to match	CIWSSPL3029	30	29	\$
Eago otylo colociable to materi				



Base Product (CIWSSP) Left Surface Direction Shown



Base Product (CIWSSP) Unfolded View

 The worksurface support panel are made of 1-14" thick, 45-pound density particleboard with high-pressure laminate on both sides

CLASSIC XXI

Assemble and disassemble 'modules' with segmented and stackable panels assembled in any combination, allowing on-module and off-module accessories matching OFG System

 Accommodates all standard types of cables, easily customized and accessed in the steel frame with "U" channels for laid management

Solid panel construction can support

worksurfaces, shelves and overhead

cabinets all 'on-module'


- The front edge color of the high-pressure laminate panel is custimizable
- Worksurface support panel brackets prevent dislodgement from the vertical post of the panel
- 18 gauge support bracket attaches to the side of the support panel and to the underside of the worksurface

NOTES:

- Product dimensions are given in approximate inches
- · Appearance of product may vary
- from descriptions

 When ordering Fabric Panels, the higher grade value will determine the price auote
- Power accessories and Vertical posts are sold separately


 Noise Reduction Coefficient is based
- on the test method ASTM C-423
- Review finish options on pg. 76, Or see OFG Finish and Upholstery Card



TO ORDER:

Select the product number and then add the codes for Laminate Option, Color Selection and Facing Direction.

For example, to order a Classic XXI 20" x 26" Laminate/Laminate Worksurface Support Panel (CIWSSPL2026) w/ Black Plastic Color (B), Biltmore Cherry Laminate (4031) and Left Facing Direction (L), select:



Base Product (CIWSB) Left Surface Direction Shown Presentation View

DESCRIPTION	PRODUCT NUMBER	DIRECTION	DEPTH		PRICING
Worksurface Support Bracket	CIWSBL	Left	4	3	\$
Tromounace Support Bracket	CIWSBR	Right	4	3	\$
Provides auxiliary support at front edge					

- Provides auxiliary support at front edge of worksurface where a return panel condition exists
- Worksurface depth must match return panel width
- Should not be used in place of cantilever bracket

CLASSIC XXI

- Assemble and disassemble 'modules' with segmented and stackable panels assembled in any combination, allowing on-module and off-module accessories matching OFG System Finishes
- Accommodates all standard types of cables, easily customized and accessed in the steel frame with "U" channels for laid management
- Solid panel construction can support worksurfaces, shelves and overhead cabinets all 'on-module'
- 18 gauge support bracket attaches to the side of the support panel and to the underside of the worksurface
- Easily installed with included hardware kit



Select the product number and then add the codes for Color Selection (Metal only).

For example, to order a Classic XXI Left Worksurface Support Bracket and Lock Clip (CIWSBL) w/ Black Metal Powder-Coat Color (27), select:

Product Number

CIWSBL 27

Color Selection



DESCRIPTION	PRODUCT NUMBER	WIDTH		HEIGHT	PRICING
Center Drawer	3CD	18	18	2-3/4	\$
One piece molded construction with ball-bearing slides					
Available with key alike (speak to a sales representative, or include preferred key core number)					



DESCRIPTION	PRODUCT NUMBER	Length	PRICING
Vertical Cord Manager	CICM6	72	\$
 Used to provide guidance of cords above and below the worksurface Snaps into side of trim rail Can be field cut to any length 			

TO ORDER:

Select the product number and then add the codes for Color Selection (3CD only).

For example, to order a Classic XXI Center Drawer (3CD) w/ Black Plastic Color (27), select:

Product Number

3CD B

Color Selection


 Review finish options on pg. 76, Or see OFG Finish and Upholstery Card

> PUNICOR OFFICE FURNITURE GROUP

65

NOTES:

Product dimensions are given in approximate inches
 Appearance of product may vary from descriptions
 When ordering Fabric Panels, the higher grade value will determine the price quote
 Power accessories and Vertical posts are sold separately
 Noise Reduction Coefficient is based on the test method ASTM C-423




Base Product (39066021)

DESCRIPTION	PRODUCT NUMBER	WIDTH	LENGTH	PRICING
Slimline Outer Grommet	39066021	8-1/2	2-1/4	\$

•	Used with Slimline Inner Grommet to
	allow cable access above and below
	worksurfaces

Used with preconfigured worksurfaces

DESCRIPTION PRODUCT NUMBER WIDTH LENGTH PRICING	Slimline Inner Grommet	39000020	/		Ф
		39066020	7	2	¢.
	DESCRIPTION	PRODUCT NUMBER	WIDTH	LENGTH	PRICING



Base Product (39066020)

DESCRIPTION	PRODUCT NUMBER	WIDTH	LENGTH	PRICING
Slimline Inner Grommet	39066020	7	2	\$
Used with Slimline Outer Grommet to allow cable management above and below worksurfaces Used with preconfigured worksurfaces				

TO ORDER ITEMS ON THIS PAGE:

Select the product number and then add the codes for Color Selection.

For example, to order a Classic XXI Slimline Outer Grommet (39066021), w/ Black Plastic Color (B), select:

Product Number 39066021 Color Selection

66

CLASSIC XXI


- Assemble and disassemble 'modules' with segmented and stackable panels assembled in any combination, allowing on-module and off-module accessories matching OFG System
- Accommodates all standard types of cables, easily customized and accessed in the steel frame with "U" channels for laid management
- Solid panel construction can support worksurfaces, shelves and overhead cabinets all 'on-module'
- Purchase accordingly to pre-cut area of worksurfaces for a proper fit




- Product dimensions are given in approximate inches
 Appearance of product may vary from descriptions
 When ordering Fabric Panels, the higher grade value will determine the
- Power accessories and Vertical posts are sold separately
 Noise Reduction Coefficient is based on the test method ASTM C-423
- Review finish options on pg. 76, Or see OFG Finish and Upholstery Card




Overhead Storage & Accessories • Overview










Shelf Divider Pg. 68

Universal Shelf (CILS & CIRS) Pg. 69


Overhead Dividers Pg. 70



Corner Bookshelf (CISFCB) Pg. 71




Universal Overhead Cabinet (CIRDS, CIRDF & CIRDL) Pg. 71



Venus Overhead (CIVNOS, CIVNOL & CIVNOF) Pg. 72



Markerboard (CIMB) Pg. 73



Fabric Covered Tackboard (CITBB Pg. 73



NOTES:

- Product dimensions are given in approximate inches
- · Appearance of product may vary

CLASSIC XXI

Assemble and disassemble 'modules' with segmented and stackable panels assembled in any combination, allowing on-module and off-module accessories matching OFG System

Accommodates all standard types of cables, easily customized and accessed in the steel frame with "U"

Solid panel construction can support worksurfaces, shelves and overhead

On-module overheads (excluding markerboards, tackboards and tool rails) include a specially designed hanger bracket to prevent accidental dislodgement from the panel or wall

Meets or exceeds the BIFMA standards for on-module components, excelling in two load tests: functional load and proof load (see Planning Guidelines

Cabinets can only be hung with the top aligned to a 12" tile, securing it to the horizontal rail

Off-module Mounted Shelves &

On-module Mounted Shelves & Cabinets have integral teeth to engage in the vertical post, by easily holding the cabinet bottom out about 30 degrees then rotate into place

channels for laid management

cabinets all 'on-module'

for more details)

- from descriptions

 When ordering Fabric Panels, the higher grade value will determine the price auote
- Power accessories and Vertical posts are sold separately

 Noise Reduction Coefficient is based
- on the test method ASTM C-423
- Review finish options on pg. 76, Or see OFG Finish and Upholstery Card

Overhead Storage • Laminate End Shelves



DESCRIPTION	PRODUCT NUMBER	WIDTH	PRICING
Low Shelf	CILS24	24	\$
Eow Gilen	CILS30	30	\$
On module storage with end panel	CILS36	36	\$
brackets designed to prevent accidental	CILS42	42	\$
dislodging	CILS48	48	\$
9-1/4" tall by 13-5/8 deep monochromatic laminate-covered end	CILS54	54	\$
panels with edge banding	CILS60	60	\$
Steel storage shelf			

\vdash	

•	Used with laminate low, regular and coat racks & flipper door units (see pg.)

DESCRIPTION	PRODUCT NUMBER			PRICING
Shelf Divider	CISD	8	13	\$

Base Product (CISD)

TO ORDER:

Select the product number and then add the codes for Color Selection and Laminate Option.

For example, to order a 24" Laminate End Low Shelf (CILS24), w/ Black Plastic Color (B) and Biltmore Cherry Laminate (4031), select:

Product Number В Color Selection

Assemble and disassemble 'modules' with segmented and stackable panels assembled in any combination, allowing on-module and off-module accessories matching OFG System

CLASSIC XXI

- Accommodates all standard types of cables, easily customized and accessed in the steel frame with "U" channels for laid management
- Solid panel construction can support worksurfaces, shelves and overhead cabinets all 'on-module'
- End panels re constructed of 14gauge steel with a laminate finish
- The shelf is an 18-gauge steel weldment with a powder-coat finish
- The shelf front edge has a PVC extrusion that also provides space for a concealed flush mount task light

NOTES:

- · Product dimensions are given in
- approximate inchesAppearance of product may vary
- from descriptions

 When ordering Fabric Panels, the higher grade value will determine the price quote
 • Power accessories and Vertical posts
- Noise Reduction Coefficient is based on the test method ASTM C-423
- Review finish options on pg. 76, Or see OFG Finish and Upholstery Card




Overhead Storage • Universal Shelf

Rasiused edge runs the full width of


shelf front to conceal task light

attachment (sold separately)



Universal Low Shelf (CILS) Presentation View

DESCRIPTION	PRODUCT NUMBER	WIDTH	PRICING
Universal Low Shelf	CIULSR24	24	\$
Sinversal Lew Silon	CIULSR30	30	\$
	CIULSR36	36	\$
5" high back included with 13-1/4" deep	CIULSR42	42	\$
shelf	CIULSR48	48	\$
Includes mounting brackets (see options	CIULSR54	54	\$
below)	CIULSR60	60	\$
Accepts shelf dividers at increments (sold separately)			





DESCRIPTION	PRODUCT NUMBER	WIDTH	PRICING
Universal Regular Shelf	CIURSR24	24	\$
omvorour regular onon	CIURSR30	30	\$
	CIURSR36	36	\$
12-1/2" high back included with 13-1/4" deep shelf	CIURSR42	42	\$
	CIURSR48	48	\$
Includes mounting brackets (see options	CIURSR54	54	\$
below)	CIURSR60	60	\$
Accepts shelf dividers at increments (sold separately)			



Notch Shelf Divider	NSD	7-1/4	11-1/2	\$
DESCRIPTION	PRODUCT NUMBER	WIDTH	HEIGHT	PRICING

Used in Venus Cabinet, Universal Shelves and Universal Cabinets, which are slotted, allowing 1" increment adjustments

Rasiused edge runs the full width of shelf front to conceal task light attachment (sold separately)

Selectable Metal Powder-Coat Finish

NSD			

TO ORDER:

Select the product number and then add the codes for Color Selection (Metal Only).

For example, to order a Classic XXI 24" Universal Low Shelf (CIULSR24), w/ Black Metal Power-Coat Color (27), select:

Product Number CIULSR24 27 Metal Powder-Coat

CLASSIC XXI

- Assemble and disassemble 'modules' with segmented and stackable panels assembled in any combination, allowing on-module and off-module accessories matching OFG System
- Accommodates all standard types of cables, easily customized and accessed in the steel frame with "U" channels for laid management
- Solid panel construction can support worksurfaces, shelves and overhead cabinets all 'on-module'
- End panels re constructed of 14gauge steel with a powder-coat finish
- The shelf is an 18-gauge steel weldment with a powder-coat finish
- The shelf front edge has a PVC extrusion that also provides space for a concealed flush mount task light




- · Product dimensions are given in approximate inches
- · Appearance of product may vary from descriptions
- When ordering Fabric Panels, the higher grade value will determine the price auote
- Power accessories and Vertical posts are sold separately

 Noise Reduction Coefficient is based
- on the test method ASTM C-423
- Review finish options on pg. 76, Or see OFG Finish and Upholstery Card



Overhead Storage • Bookshelf

Allows height adjustment with brackets



DESCRIPTION	PRODUCT NUMBER	Side 1 Panel Width	Side 2 Panel Width	PRICING
Corner Bookshelf	CISFCB2424	24	24	\$
Corner Booksnen	CISFCB3030	30	30	\$
	CISFCB3636	36	36	\$
1-1/4" particleboard sandwiched	CISFCB4242	42	42	\$
between laminate backer	CISFCB4848	48	48	\$
 16" depth 				

CLASSIC XXI

- Assemble and disassemble 'modules' with segmented and stackable panels assembled in any combination, allowing on-module and off-module accessories matching OFG System
- Accommodates all standard types of cables, easily customized and accessed in the steel frame with "U" channels for laid management
- Solid panel construction can support worksurfaces, shelves and overhead cabinets all 'on-module'
- The shelf is an 18-gauge steel weldment with a powder-coat finish and laminate finish underneath
- The shelf front edge has a PVC extrusion that also provides space for a concealed flush mount task light

NOTES:

- · Product dimensions are given in
- approximate inches

 Appearance of product may vary
- from descriptions

 When ordering Fabric Panels, the higher grade value will determine the
- Power accessories and Vertical posts are sold separately
 Noise Reduction Coefficient is based on the test method ASTM C-423
- Review finish options on pg. 76, Or see OFG Finish and Upholstery Card

TO ORDER:

Select the product number and then add the codes for the desired Laminate Option and Color Selection.

For example, to order a Classic XXI 24" x 24" Corner Bookshelf w/ T-Edge (CISFCB2424T), w/ Biltmore Cherry Laminate Finish (4031) and Black Plastic Color (B), select:

Color Selection Product Number CISFCB2424T 4031 B Laminate Option





Overhead Storage • Cabinet

Door retracts inside overhead

Fabric Covered Door retracts inside


overhead

overhead

X	

Universal Overhead Cabinet w/ Solid Door (CIRDS) Presentation View

DESCRIPTION	PRODUCT NUMBER	WIDTH	PRICING
Universal Overhead Cabinet w/	CIRDS24	24	\$
Solid Door Color	CIRDS30	30	\$
	CIRDS36	36	\$
16-1/2 high and 14-1/2" deep cabinet	CIRDS42	42	\$
with solid paint finish	CIRDS48	48	\$
 Includes mounting brackets (see 	CIRDS54	54	\$
options)	CIRDS60	60	\$
 May have specific keying (see options) 			




Presentation View

DESCRIPTION	PRODUCT NUMBER	WIDTH	Grade B	
Universal Overhead Cabinet w/	CIRDF24	24	\$ \$	\$
Fabric Covered Door	CIRDF30	30	\$ \$	\$
	CIRDF36	36	\$ \$	\$
16-1/2 high and 14-1/2" deep cabinet with solid paint finish	CIRDF42	42	\$ \$	\$
	CIRDF48	48	\$ \$	\$
 Includes mounting brackets (see 	CIRDF54	54	\$ \$	\$
options)May have specific keying (see options)	CIRDF60	60	\$ \$	\$

CLASSIC XXI

- Assemble and disassemble 'modules' with segmented and stackable panels assembled in any combination, allowing on-module and off-module accessories matching OFG System Finishes
- Accommodates all standard types of cables, easily customized and accessed in the steel frame with "U" channels for laid management
- Solid panel construction can support worksurfaces, shelves and overhead cabinets all 'on-module'
- End panels re constructed of 14gauge steel with a powder-coat finish
- The shelf is an 18-gauge steel weldment with a powder-coat finish
- The shelf front edge has a PVC extrusion that also provides space for a concealed flush mount task light
- The lifting force required to open an overhead door (based upon a 48" unit) is 6.0 lbs
- Included lock can have specific keying combinations, available at no additional charge. Any request must be included with the order
- Shelf dividers are available and easily installed and adjusted with incremental slots



Universal Overhead Cabinet w/ Laminate Door (CIRDL) Presentation View

\$
Δ.
\$
\$
\$
\$
\$
\$

TO ORDER:

Select the product number and then add the codes for Color Selection and Door Option.

For example, to order a Classic XXI 24" Universal Overhead Cabinet w/ Fabric Covered Door (CIRDF24), w/ Starlight Silver Metal Powder-Coat (34), and 8066 Pewter Interlude Fabric (8066), select:

Laminate Covered Door retracts inside

Product Number Door Option
CIRDF24 34 8066
Color Selection

UNICOR OFFICE FURNITU

Product dimensions are given in approximate inches
Appearance of product may vary

 When ordering Fabric Panels, the higher grade value will determine the

Power accessories and Vertical posts

 Noise Reduction Coefficient is based on the test method ASTM C-423
 Review finish options on pg. 76, Or see OFG Finish and Upholstery Card

from descriptions

are sold separately

price auote

71

NOTES:

Overhead Storage • Cabinet




RIPTION	PRODUCT NUMBER	WIDTH	PRICING
Cabinet w/ Solid	CIVNOS30	30	\$
r	CIVNOS36	36	\$
	CIVNOS42	42	\$
/4" deep cabinet with a	CIVNOS48	48	\$
door finish difference	CIVNOS54	54	\$
g brackets (for on-	CIVNOS60	60	\$

Venus Overhead Cabine w/ Fabric Covered Upper Door (CIVNOF Presentation View

Venus Overhead Cabinet w/ Solid Upper Door (CIVNOS)

DESCRIPTION	PRODUCT NUMBER	WIDTH	Grade B	
Venus Overhead Cabinet w/ Fabric	CIVNOF30	30	\$ \$	\$
Covered Upper Door	CIVNOF36	36	\$ \$	\$
	CIVNOF42	42	\$ \$	\$
17" high and 19-1/4" deep cabinet with a lower door and fabric covered upper	CIVNOF48	48	\$ \$	\$
	CIVNOF54	54	\$ \$	\$
door	CIVNOF60	60	\$ \$	\$
 Includes mounting brackets (for on- module attachment to panels) 				



DESCRIPTION	PRODUCT NUMBER	WIDTH	PRICING
Venus Overhead Cabinet w/	CIVNOL30	30	\$
Laminate Covered Upper Door	CIVNOL36	36	\$
••	CIVNOL42	42	\$
17" high and 19-1/4" deep cabinet with a	CIVNOL48	48	\$
lower and laminated upper door finish	CIVNOL54	54	\$
Includes mounting brackets (for on- module attachment to panels)	CIVNOL60	60	\$

CLASSIC XXI

- Assemble and disassemble 'modules' with segmented and stackable panels assembled in any combination, allowing on-module and off-module accessories matching OFG System Finishes
- Accommodates all standard types of cables, easily customized and accessed in the steel frame with "U" channels for laid management
- Solid panel construction can support worksurfaces, shelves and overhead cabinets all 'on-module'
- End panels re constructed of 14gauge steel with a powder-coat finish
- The shelf is an 18-gauge steel weldment with a powder-coat finish
- The shelf front edge has a PVC extrusion that also provides space for a concealed flush mount task light
- Included lock can have specific keying combinations, available at no additional charge. Any request must be included with the order
- Shelf dividers are available and easily installed and adjusted with incremental slots
- Shelf is resistance welded so there are no visible weld marks
- A 10-gauge hot rolled steel link arm connects the Plastic door and lower door
- Spring tension allows less than 5 lbs. of force used to assist in the opening and closing of the doors, even with a closed fist (ADA compliant)

$T \cap$	\sim	_	FR.	

Select the product number and then add the codes for Color Selection and Upper Door Option (see below).

For example, to order a Classic XXI 24" Venus Overhead Cabinet w/ Solid Upper Door (CIVNOS24), w/ Starlight Silver Metal-Powder Coat (34) and Translucent (No Finish) Door (TR), select:

Product Number	Upper Door Option
CIVNOS24	34 TR
	Color Selection

Solid Upper Dod (CIVNOS o	
No Finish Option (frosted acrylic)	TR
Normal Plastic Options	See OFG Finish Card
Normal Fabric Options	See OFG Upholstery Card
Normal Laminate Options	See OFG Finish Card

Noise Reduction Coefficient is based on the test method ASTM C-423
 Review finish options on pg. 76, Or see OFG Finish and Upholstery Card

 Product dimensions are given in approximate inches

· Appearance of product may vary


 When ordering Fabric Panels, the higher grade value will determine the

Power accessories and Vertical posts

from descriptions

price auote

Accessories • Markerboard

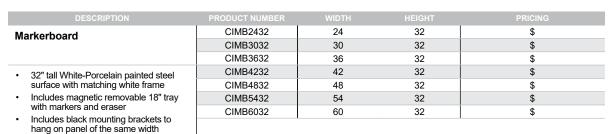

CLASSIC XXI

- Assemble and disassemble 'modules' with segmented and stackable panels assembled in any combination, allowing on-module and off-module accessories matching OFG System
- Accommodates all standard types of cables, easily customized and accessed in the steel frame with "U" channels for laid management
- Solid panel construction can support worksurfaces, shelves and overhead cabinets all 'on-module'
- On-module mounts utilize the slots in vertical posts and component must match width of panel, allowing a vertical adjustment in 1" increments



Base Product (CIMB)

Markerboard (CIMB)

Presentation View

NOTES:

- Product dimensions are given in approximate inches
 Appearance of product may vary from descriptions
 When ordering Fabric Panels, the higher grade value will determine the
- Power accessories and Vertical posts are sold separately
 Noise Reduction Coefficient is based on the test method ASTM C-423
- Review finish options on pg. 76, Or see OFG Finish and Upholstery Card




Select the product number.

For example, to order a Classic XXI 24" x 32" Markberboard (CIMB2432), select:


Product Number CIMB2432



Accessories • Tackboards



Fabric Covered Tackboard (CITBB) Presentation View



Base Product (CITBB)

DESCRIPTION	PRODUCT NUMBER	WIDTH	HEIGHT	Fabric Grade A	Fabric Grade B	Fabric Grade C
Fabric Covered Tackboard	CITBB2412	24	12	\$	\$	\$
Tabilo Govered Tababbara	CITBB3012	30	12	\$	\$	\$
	CITBB3612	36	12	\$	\$	\$
Includes mounting brackets to hang on	CITBB4212	42	12	\$	\$	\$
panel of the same width	CITBB4812	48	12	\$	\$	\$
Constructed of 3/4" tackable core and	CITBB5412	54	12	\$	\$	\$
covered with fabric	CITBB6012	60	12	\$	\$	\$
•	CITBB2416	24	16	\$	\$	\$
	CITBB3016	30	16	\$	\$	\$
	CITBB3616	36	16	\$	\$	\$
	CITBB4216	42	16	\$	\$	\$
	CITBB4816	48	16	\$	\$	\$
	CITBB5416	54	16	\$	\$	\$
	CITBB6016	60	16	\$	\$	\$
	CITBB2430	24	30	\$	\$	\$
	CITBB3030	30	30	\$	\$	\$
	CITBB3630	36	30	\$	\$	\$
	CITBB4230	42	30	\$	\$	\$
	CITBB4830	48	30	\$	\$	\$
	CITBB5430	54	30	\$	\$	\$
	CITBB6030	60	30	\$	\$	\$
	CITBB2448	24	48	\$	\$	\$
	CITBB3048	30	48	\$	\$	\$
	CITBB3648	36	48	\$	\$	\$
	CITBB4248	42	48	\$	\$	\$
	CITBB4848	48	48	\$	\$	\$

60

CITBB6048

CLASSIC XXI

- Assemble and disassemble 'modules' with segmented and stackable panels assembled in any combination, allowing on-module and off-module accessories matching OFG System
- Accommodates all standard types of cables, easily customized and accessed in the steel frame with "U" channels for laid management
- Solid panel construction can support worksurfaces, shelves and overhead cabinets all 'on-module'
- On-module mounts utilize the slots in vertical posts and component must match width of panel, allowing a vertical adjustment in 1" increments

TO ORDER:

Select the product number and then add the codes for Fabric Option.

For example, to order a Classic XXI 24" x 12" Fabric Covered Tackboard (CITBB2412), w/ 8066 Pewter Interlude Fabric (8066), select:

Product Number CITBB2412 8066 Fabric Option

48


NOTES:

- Product dimensions are given in approximate inches
 Appearance of product may vary
- from descriptions

 When ordering Fabric Panels, the higher grade value will determine the
- Power accessories and Vertical posts are sold separately
 Noise Reduction Coefficient is based on the test method ASTM C-423
- Review finish options on pg. 76, Or see OFG Finish and Upholstery Card



Accessories • Other



Base Product (TLELED__DMS)

storage cabinets or shelving (product width to which they are attached)
Attachment hardware included attache

•	Attachment hardware included attaches effortlessly
•	Touch and hold dimmability with last- state memory 100%-15%

Attaches to the bottom of overhead

- Silver anodized aluminum body/black plastic end caps
- 60W transformer with 11' cord
- Includes 2 cord managers
- Automatic shut off after 12 hours

DESCRIPTION	PRODUCT NUMBER	WIDTH	Width of Overhead	PRICING
Tuck LED Tasklight	TLELED17DMS	LED17DMS 18 24-36 \$		\$
Tuok LLD Tuokiigitt	TLELED31DMS	24	42-48	\$
	TLELED44DMS	36	54 & wider	\$

CLASSIC XXI

- Assemble and disassemble 'modules' with segmented and stackable panels assembled in any combination, allowing on-module and off-module accessories matching OFG System
- Accommodates all standard types of cables, easily customized and accessed in the steel frame with "U" channels for laid management
- Solid panel construction can support worksurfaces, shelves and overhead cabinets all 'on-module'

NOTES:

- Product dimensions are given in approximate inches
 Appearance of product may vary from descriptions
 When ordering Fabric Panels, the higher grade value will determine the
- Power accessories and Vertical posts are sold separately
 Noise Reduction Coefficient is based on the test method ASTM C-423
- Review finish options on pg. 76, Or see OFG Finish and Upholstery Card

Product Number TLELED22DMS

TO ORDER:


Select the product number to order.

For example, to order a 17" Tuck LED Tasklight (TLELED22DMS), select:



Classic XXI • Finishes

Plasticpropylene (POLY) Colors



Black В

Warm Grey







Sand


Light Tone

32

CLASSIC XXI

- Assemble and disassemble 'modules' with segmented and stackable panels assembled in any combination, allowing on-module and off-module accessories matching OFG System
- Accommodates all standard types of cables, easily customized and accessed in the steel frame with "U" channels for laid management
- Solid panel construction can support worksurfaces, shelves and overhead cabinets all 'on-module'
- Quality is our priority, due to differences in stocks, piece to piece variation may occur
- Not all finishes are available for all product lines offered by UNICOR OFG
- · Samples are available upon request
- To locate your local UNICOR OFG Sales Representative, go online to www.unicor.gov/OFGSalesReps.aspx
- To view a complete list of finishes available to UNICOR OFG products and how to request samples, go online to www.unicor.gov/

Metal Powder Coat



27



Warm Gray



28



34





35



Plastic Trim Style	Metal Trim Style					
Black (B)	Black (27)					
Grey (G)	Gray (29)					
ListaTon - (L)	Light Tone (32)					
Light Tone (L)	Cottonwood (35)					
Sand (S)	Sand (28)					
14/ 0 140	Warm Gray (33)					
Warm Grey (W)	Starlight Silver (34)					

- Product dimensions are given in approximate inches
- · Appearance of product may vary
- from descriptions

 When ordering Fabric Panels, the higher grade value will determine the price quote
- Power accessories and Vertical posts
- Noise Reduction Coefficient is based on the test method ASTM C-423
- Review finish options on pg. 76, Or see OFG Finish and Upholstery Card



Classic XXI • Finishes

Laminate

	Code	Name	Code		Code		Code
5th Ave Elm	PLM0677	Executive Mahogany	PLM0775	Natural Oak	PLM2503	Sterling Ash	PLM8217
Amber Cherry	PLM4030	Fashion Grey	PLM0787	Natural-Tigris	PLM4669	Stone Grafix	PLM2506
Amber Maple	PLM0472	Flax Gauze	PLM2513	Neo Walnut	PLM8207	Studio Teak	PLM8214
Astro Strandz	PLM8223	Flax Linen	PLM4990	Neutral Twill	PLM0163	Twilight Zephyr	PLM4041
Beigewood	PLM7850	Florence Walnut	PLM8208	Neutral White	PLM2516	Vapor Strandz	PLM8225
Biltmore Cherry	PLM4031	Fog	PLM0374	New Age Oak	PLM0104	Veranda Teak	PLM8209
Black	PLM0209	Folkstone	PLM2517	Noble Mahogany	PLM0220	Washington Oak	PLM0748
Blackbird	PLM8205	Folkstone Grafix	PLM0503	North Sea	PLM0401	White Barn	PLM8221
Brighton Walnut	PLM4032	Ginger Root Maple	PLM3247	Oiled Soapstone	PLM4044	White Tigris	PLM4043
Buka Bark	PLM8216	Gloss White Markerboard	PLM2521	Oyster Grey	PLM2519	White Twill	PLM1007
Canyon Zephyr	PLM4038	Graphite	PLM2514	Pearl Soapstone	PLM4045	Wild Cherry	PLM7101
Casual Linen	PLM4944	Graphite Grafix	PLM2507	Pennsylvania Cherry	PLM0392		
Charcoal-Boomerang	PLM6942	Graphite Twill	PLM0166	Pewter Brush	PLM4079		
Citadel	PLM2520	Graystone	PLM2505	Pewter Mesh	PLM4046		
Classic Linen	PLM4943	Grey	PLM4047	Portico Teak	PLM8210		
Colombian Walnut	PLM4034	Grey Elm	PLM8222	Pumice	PLM2515		
Concrete Stone	PLM0670	Harvest Maple	PLM8215	Rio	PLM8219		
Cosmic Strandz	PLM8226	Kensington Maple	PLM4036	Sail White	PLM0058		
Crisp Linen	PLM4942	Khaki Brown	PLM8211	Sarum Twill	PLM0164		
Desert Zephyr	PLM4039	Landmarkwood	PLM8220	Satin Stainless	PLM8224		
Designer White	PLM8212	Lime Stone	PLM2511	Select Cherry	PLM0445		
Dove Grey	PLM1013	Misted Zephyr	PLM4040	Shaker Cherry	PLM4035		
Earthen Twill	PLM0165	Monticello Maple	PLM4037	Sheer Mesh	PLM4100		
Earthen Warp	PLM4052	Mouse	PLM2518	Silver Alchemy	PLM4081		
Earthen Wash	PLM2510	Natural Canvas	PLM2509	Silver Oak	PLM8218		
Elemental Stone	PLM1005	Natural Maple	PLM2512	Steel Mesh	PLM4068		

Upholstery

Please go online to UNICOR OFG website for a complete list and grade of Upholstery Fabric selections.

CLASSIC XXI

- Assemble and disassemble 'modules' with segmented and stackable panels assembled in any combination, allowing on-module and off-module accessories matching OFG System
- Accommodates all standard types of cables, easily customized and accessed in the steel frame with "U" channels for laid management
- Solid panel construction can support worksurfaces, shelves and overhead cabinets all 'on-module'
- Quality is our pirority, due to differences in stocks, piece to piece variation may occur
- Not all finishes are available for all product lines offered by UNICOR OFG
- · Samples are available upon request
- To locate your local UNICOR OFG Sales Representative, go online to www.unicor.gov/OFGSalesReps.aspx
- To view a complete list of finishes available to UNICOR OFG products and how to request samples, go online to www.unicor.gov/

NOTES:

- Product dimensions are given in approximate inches
- · Appearance of product may vary
- from descriptions

 When ordering Fabric Panels, the higher grade value will determine the
- Power accessories and Vertical posts are sold separately
 Noise Reduction Coefficient is based on the test method ASTM C-423
- Review finish options on pg. 76, Or see OFG Finish and Upholstery Card



How To Order

■By Internet

We're ready to take your electronic order. See us at:

www.unicor.gov/ofg

™By Phone

Use your government credit card and call UNICOR toll free at:

(800) 827-3168

By Fax

Fax your purchase order 24 hours a day to:

(859) 254-9390 Standard Orders (859) 254-9048 Credit Cards

®By Mail

Send your purchase order to:

UNICOR **Customer Service Center** P.O. Box 13640 Lexington, KY 40577-1670

⊚Customer Service

For information about products, prices or to request catalogs, call UNICOR Customer Service at (800) 827-3168, Monday-Friday, from 7:45 a.m. to 4:00 p.m. EST or leave a message at other times.

To locate your local OFG Sales Representative, go

to unicor.gov/OFGSalesReps.aspx



Credit Card Order Form

FAX orders to (859) 254-9048 or call (800) 827-3168. Order online at www.unicor.gov/ofg.

			SHIPF	ING ADDRES	SS (NO POS	T OFFICE B	OXES	PLEAS	SE)				
NAME													
TITLE													
AGENCY													
STREET													
CITY				STA	TE		ZIP						
TELEPHONE ()			F/	AX NUMBER	() _							
E-MAIL								FAX N -	IUMBER I	MUS	ST BE	INCLU	JDED
CREDIT CARD# _							_ EXP	IRATIO	N DATE				
SIGNATURE								DATE	·				
Please be sure tha	at all info	ormation is	complete to	avoid delay	ying your or	der.							
		I			I		1		Matal				

Glass/ Screen Option **Product** Raceways Raceways Plastic Color Fabric Side 1 QTY. Unit Price TOTAL Powder Number Side 1 Side 2 Coat **SUBTOTAL** NOTE: FOR SHIPMENTS OUTSIDE THE CONTIGUOUS U.S., FREIGHT WILL BE BASED UPON RATES AT TIME OF **OVERSEAS SHIPPING DELIVERY TOTAL**

THANK YOU FOR YOUR ORDER.